THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	REVISED PER ECO-11-005027	11MAR11	RK	HMR

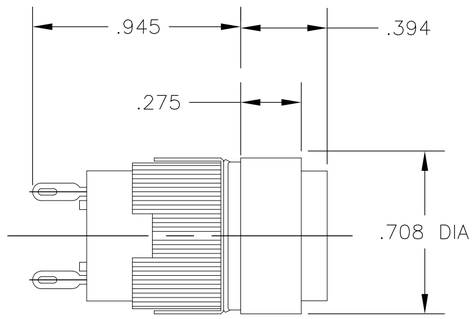



SIDE VIEW
(SEE NOTE 3)



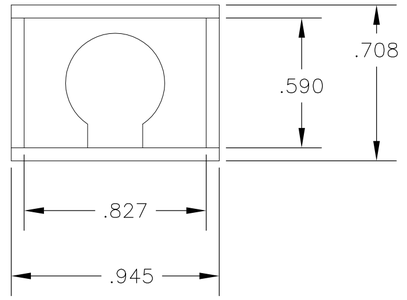

SPECIFICATIONS:

LAMP DISSIPATION: 1.2W MAX.

INSULATION RESISTANCE: 100 MEGOHMS MIN.

DIELECTRIC STRENGTH: 2000 VAC.

OPERATING TEMPERATURE: –20°C TO +50°C
(–4°F TO +122°F).

NOTES:

1. LAMP IS T 3/4 MIDGET FLANGE BASE TYPE (LAMP NOT SUPPLIED).
2. 164 IS NON-OILTIGHT SERIES, 165 IS OILTIGHT SERIES.
3. VIEWS INCLUDE PLASTIC SHROUDS FOR AVAILABLE LENS SETS, (NOT SUPPLIED).
4. THE PLATINGS CONTAINED IN THIS PART SHALL CONTAIN NO LEAD.
5. PRELIMINARY PART, NOT RELEASED FOR PRODUCTION.

PART No.	MODEL NUMBER	COMMENTS
1571542-4	165TZ	4 5
1571542-3	164TZ	
1571542-2	164SZ	
1571542-1	164EZ	
5-1437569-9	165TZ	
5-1437569-3	165SZ	
4-1437569-6	165EZ	
4-1437569-1	164TZ	
3-1437569-2	164SZ	
1437569-8	164EZ	

REF AUGAT 81091

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .010
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN S KIRCORIAN 5-18-94
CHK W THIA 5-19-94
APVD W THIA 5-19-94
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME PILOT LIGHT 164/165 Z

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2-1437569-4	—

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV B1

2-1437569-4