


# PITCH 1.25mm BAR CONNECTORS

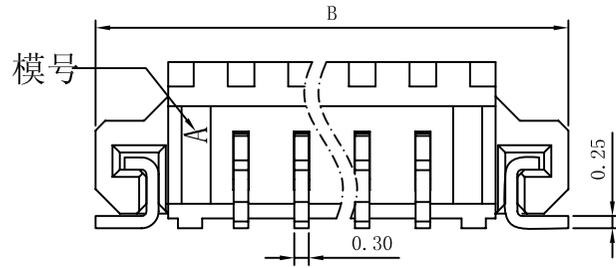

性能:

额定电流: 1A

额定电压: 100V

耐电压: 500V

接触电阻:  $\leq 20m\Omega$





绝缘电阻:  $500M\Omega$

工作温度:  $-20^{\circ}C \sim +85^{\circ}C$

塑件 (材质): LCP, UL94V-0

插簧 (材质): 磷青铜, 镀锡/镀金

焊片 (材质): 磷青铜, 镀锡/镀金

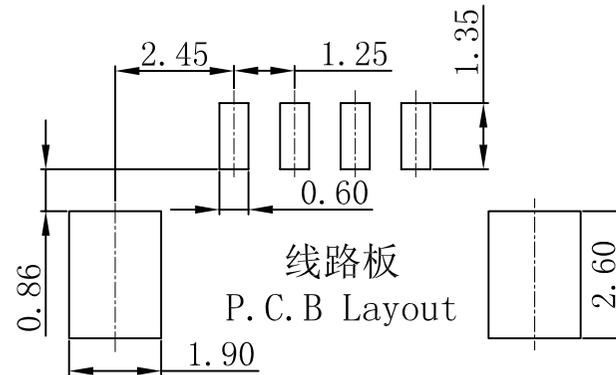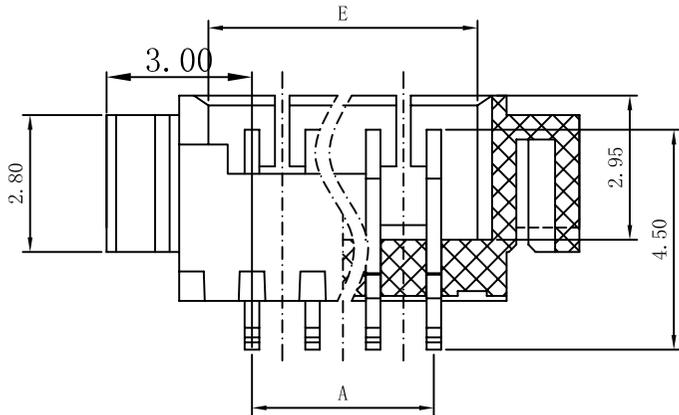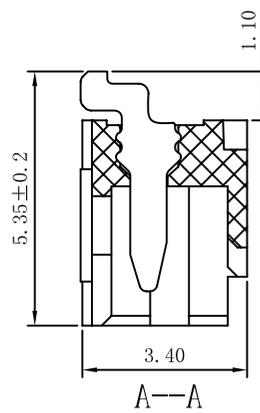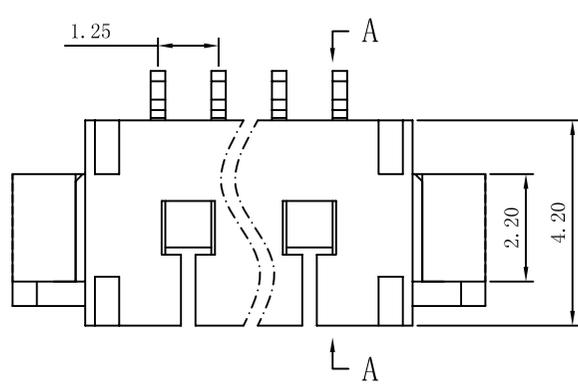

孔位	A	B	E
2	1.25	7.25	3.05
3	2.50	8.50	4.30
4	3.75	9.75	5.55
5	5.00	11.00	6.80
6	6.25	12.25	8.05
7	7.50	13.50	9.30
8	8.75	14.75	10.55
9	10.00	16.00	11.80
10	11.25	17.25	13.05
11	12.50	18.50	14.30
12	13.75	19.75	15.55
13	15.00	21.00	16.80
14	16.25	22.25	18.05
15	17.50	23.50	19.30
16	18.75	24.75	20.55

X. $\pm 0.3$	X. $^{\circ} \pm 5^{\circ}$	UNITS mm	NAME (INTENDED USE)	<b>深圳市钜硕电子有限公司</b> TITLE: 1.25mm (D型) 条形连接器卧贴式	
.X $\pm 0.25$	.X $^{\circ} \pm 2^{\circ}$	MAT'L	PART NO. (INTENDED USE)		
.XX $\pm 0.20$	.XX $^{\circ} \pm 1^{\circ}$	FINISH	AFC12-S**DCC-00		
.XXX $\pm 0.10$	.XXX $^{\circ} \pm 0.5^{\circ}$	Q'TY	APPD:		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY			CHKD:	DWG NO.:	
			DR: YLZ 2011.09.28	125N06-DWB0000000	
				SCALE	SHEET
			1/1	1/1	A