



**1. Mechanical Dimensions:**

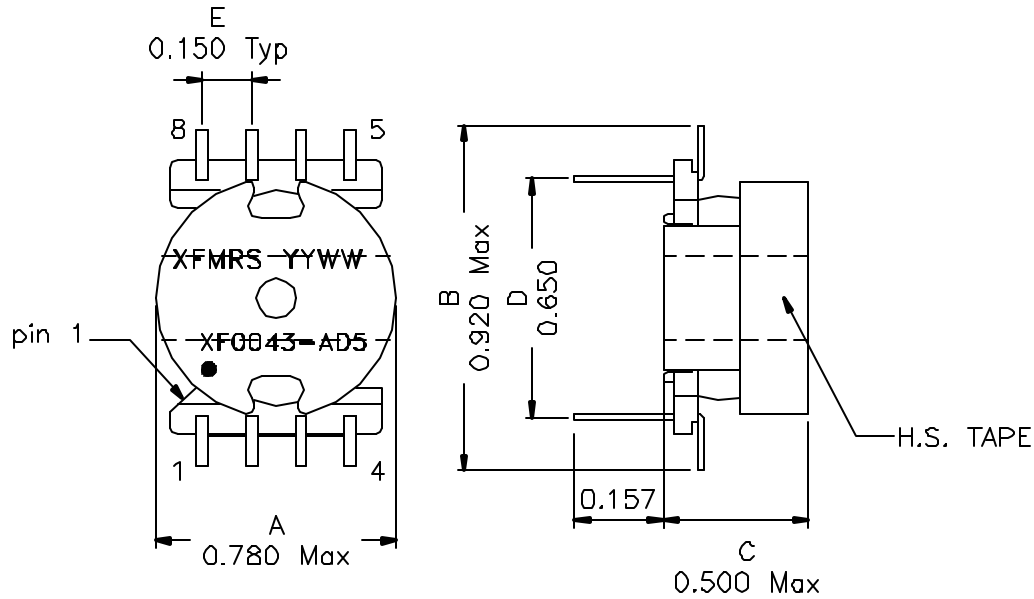

**Note:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability
2. Flammability: UL94V-0,
3. ASTM oxygen index. > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

**2. Schematic:**

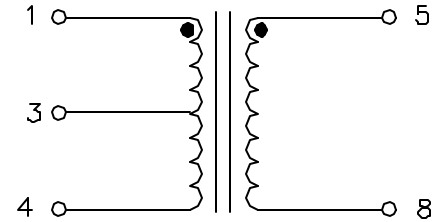

**3. Electrical Specifications: @25°C**

- OCL: 4.0mH±5% @1KHz 1V 0mA to 100mA (each winding)
- DCR: 3.00 Ohms Max (each winding)
- HIPOT: 1500VAC between windings

DOC. REV A/1

<b>XFMR5 Inc.</b>	Title: COMMON MODE CHOKES		
	P/N: XF0043-AD5		REV. A
	DWN.	李小锋	Jun-14-01
	CHK.	廖玉坤	Jun-14-01
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	APP.	BW	Jun-14-01