
HF RoHS Pb GREEN SP6001 Lead-Free/Green Series

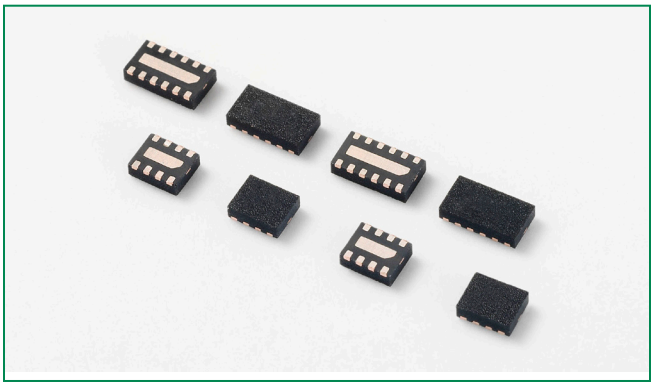


Description

The Littelfuse SP6001 SPA series integrates 4 and 6 EMI filters (C-R-C) into a small, low-profile UDFN package with each filter providing greater than -30dB attenuation at 1GHz. Additionally, each I/O is capable of shunting ±30kV ESD strikes (IEC61000-4-2, contact discharge) away from sensitive electronic components. The performance of this small, slim design makes it extremely suitable for mobile handsets, PDAs and notebook computers.


Pinout

UDFN-08



SP6001-04UTG-1

UDFN-12




SP6001-06UTG-1

Features


- EMI filtering of frequencies from 800MHz to 3GHz
- Greater than -30dB attenuation (TYP) at 1GHz
- ESD, IEC61000-4-2, ±30kV contact, ±30kV air
- Small, low-profile UDFN package (TYP 0.5mm height)

Functional Block Diagram

SP6001-04UTG-1



SP6001-06UTG-1

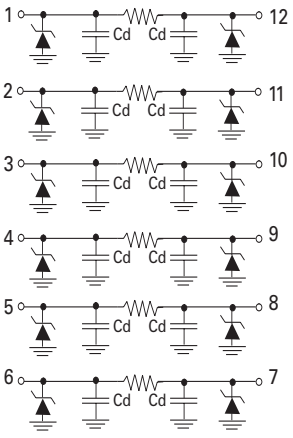

Applications

- Keypad interface for portable electronics
- LCD and camera display interfaces for handsets
- Connector interfaces for portable electronics
- Mobile phone
- Smartphone
- Portable navigation device

Lead-Free/Green SP6001

©2009 Littelfuse, Inc.
Specifications are subject to change without notice.
Please refer to http://www.littelfuse.com for current information.

Absolute Maximum Ratings

Symbol	Parameter	Value	Units
T_{OP}	Operating Temperature	-40 to 85	°C
T_{STOR}	Storage Temperature	-60 to 150	°C

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

Thermal Information

Parameter	Rating	Units
Storage Temperature Range	-65 to 150	°C
Maximum Junction Temperature	150	°C
Maximum Lead Temperature (Soldering 10s)	260	°C


Electrical Characteristics (T_{OP}=25°C)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Reverse Standoff Voltage	V_{RWM}				6.0	V
Breakdown Voltage	V_{BR}	I_R=1mA	7.0	7.5	8.0	V
Reverse Leakage Current	I_{LEAK}	V_{RWM}=5V		0.1	1.0	µA
Resistance	R_A	I_R=10mA	85	100	115	Ω
Diode Capacitance[1,2]	C_D	V_R=2.5V,f=1MHz		12		pF
Line Capacitance[1,2]	C_L	V_R=2.5V,f=1MHz	19	24	29	pF
ESD Withstand Voltage[1]	V_{ESD}	IEC61000-4-2 (Contact Discharge)	±30			kV
		IEC61000-4-2 (Air Discharge)	±30			kV
Cutoff Frequency[3]	F_{-3dB}	Above this frequency, appreciable attenutation occurs		115		MHz


Notes: [1] Parameter is guaranteed by design and/or device characterization.
[2] Total line capacitance is two times the diode capacitance (C_D).
[3] 50Ω source and 50Ω load termination

©2009 Littelfuse, Inc.
Specifications are subject to change without notice.
Please refer to http://www.littelfuse.com for current information.


Insertion Loss (S21)

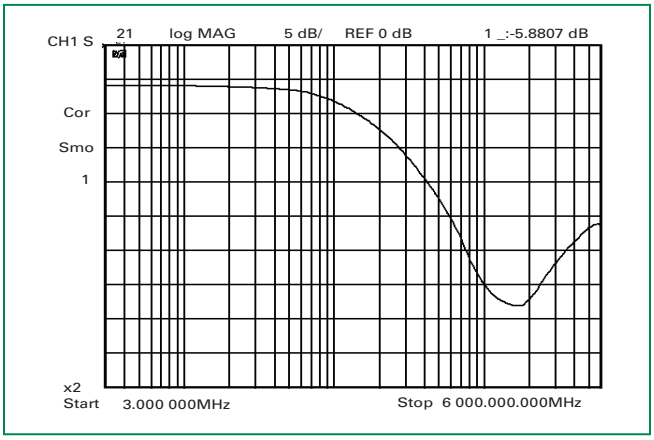

Analog Crosstalk (S41)

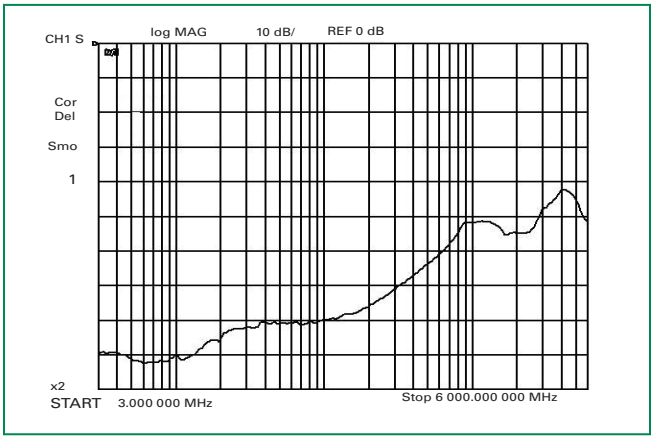

Line Capacitance vs. DC Bias

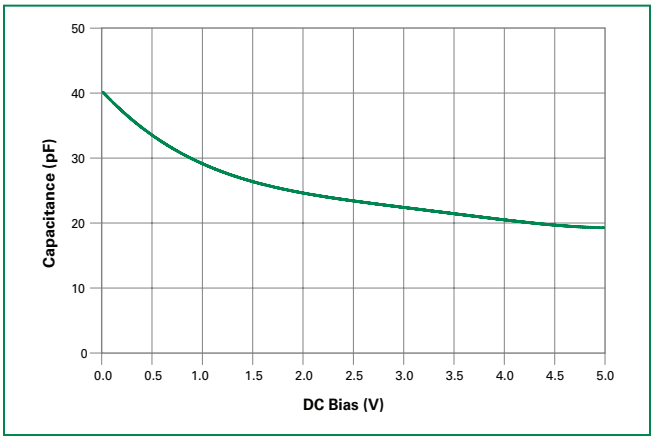


Lead-Free/Green SP6001

©2009 Littelfuse, Inc.
Specifications are subject to change without notice.
Please refer to http://www.littelfuse.com for current information.


Application Example

Dx: SP6001-04 Silicon Protection Array

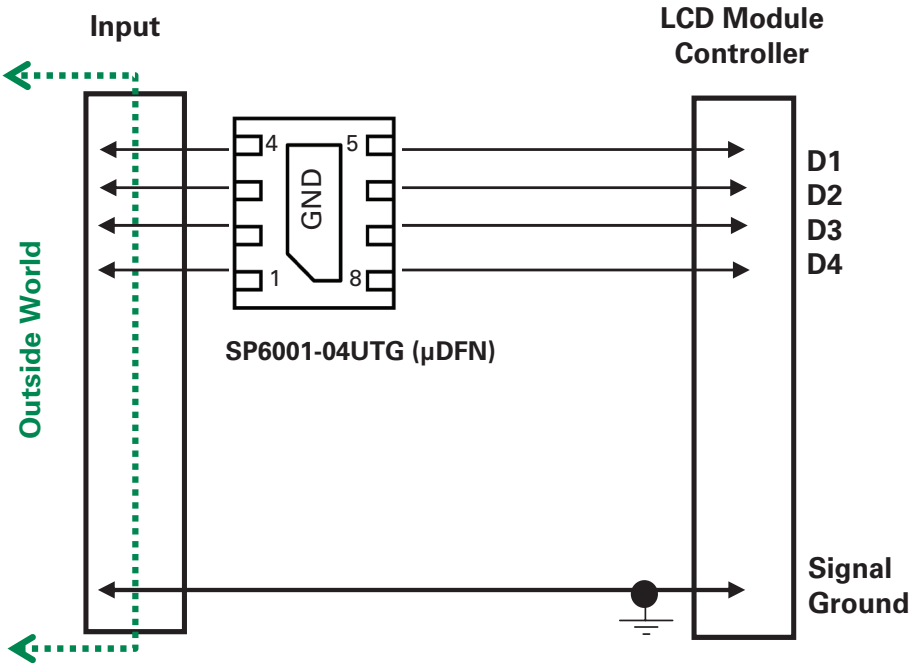


Soldering Parameters

Reflow Condition		Pb – Free assembly
Pre Heat	-Temperature Min ($T_{s(min)}$)	150°C
	-Temperature Max ($T_{s(max)}$)	200°C
	-Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus) Temp (T_L) to peak		3°C/second max
$T_{S(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	-Temperature (T_L) (Liquidus)	217°C
	-Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_P)		$250^{+0/-5}$ °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_P)		8 minutes Max.
Do not exceed		260°C

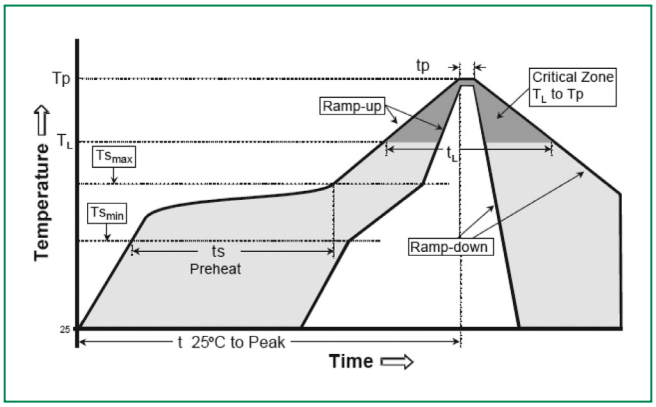


©2009 Littelfuse, Inc.
Specifications are subject to change without notice.
Please refer to http://www.littelfuse.com for current information.

Package Dimensions - UDFN-08

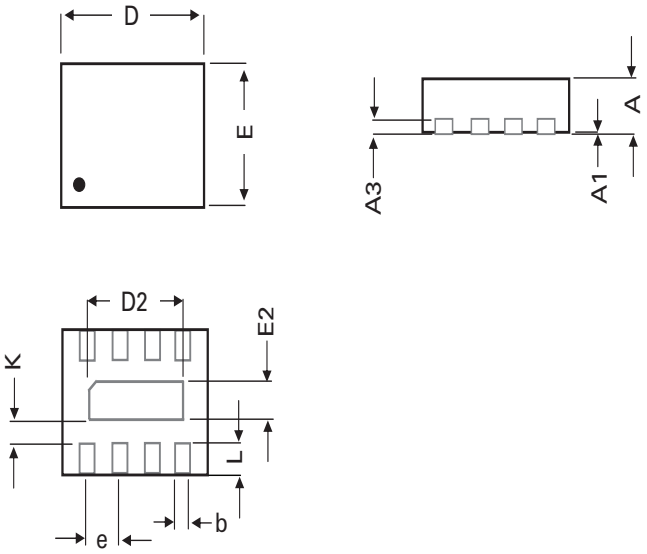

Symbol	UDFN-08			
	Millimeters		Inches	
	Min	Max	Min	Max
A	0.450	0.550	0.018	0.022
A1	0.000	0.050	0.000	0.002
A3	0.127 REF		0.005 REF	
b	0.150	0.250	0.006	0.010
D	1.600	1.800	0.063	0.071
D2	1.100	1.300	0.043	0.051
E	1.250	1.450	0.049	0.057
E2	0.300	0.500	0.012	0.020
e	0.400 BSC		0.016 BSC	
K	0.200		0.008	0.000
L	0.150	0.350	0.006	0.014


Package Dimensions - UDFN-12

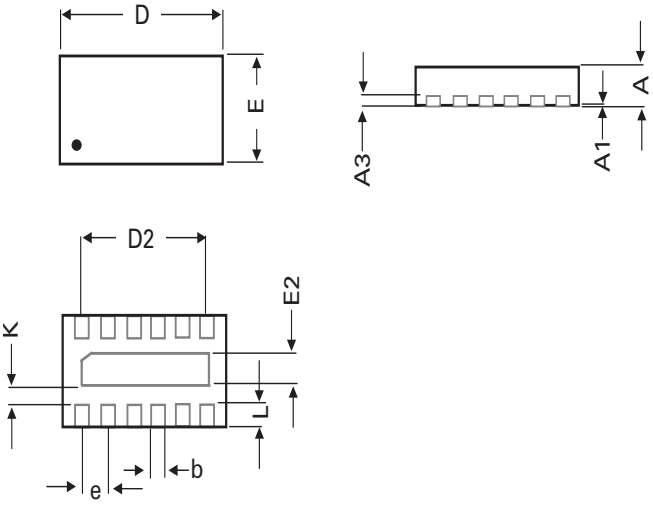


Symbol	UDFN-12			
	Millimeters		Inches	
	Min	Max	Min	Max
A	0.450	0.550	0.018	0.022
A1	0.000	0.050	0.000	0.002
A3	0.127 REF		0.005 REF	
b	0.150	0.250	0.006	0.010
D	2.400	2.600	0.094	0.102
D2	1.900	2.100	0.075	0.083
E	1.250	1.450	0.049	0.057
E2	0.300	0.500	0.012	0.020
e	0.400 BSC		0.016 BSC	
K	0.200		0.008	0.000
L	0.150	0.350	0.006	0.014

©2009 Littelfuse, Inc.
Specifications are subject to change without notice.
Please refer to http://www.littelfuse.com for current information.

Part Numbering System

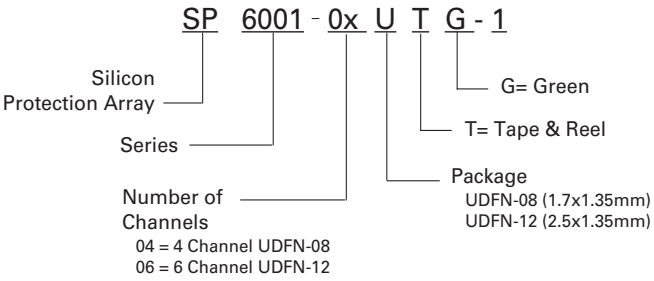

Part Marking System

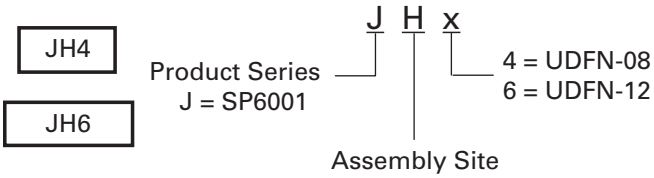

Product Characteristics

Lead Plating	Pre-Plated Frame
Lead Material	Copper Alloy
Lead Coplanarity	0.0004 inches (0.102mm)
Subsitute Material	Silicon
Body Material	Molded Epoxy
Flammability	UL94-V-0


Notes :

1. All dimensions are in millimeters
2. Dimensions include solder plating.
3. Dimensions are exclusive of mold flash & metal burr.
4. All specifications comply to JEDEC SPEC MO-223 Issue A
5. Blo is facing up for mold and facing down for trim/form, i.e. reverse trim/form.
6. Package surface matte finish VDI 11-13.

Ordering Information

Part Number	Package	Size	Marking	Min. Order Qty.
SP6001-04UTG-1	uDFN-08	1.7x1.35mm	JH4	3000
SP6001-06UTG-1	uDFN-12	2.5x1.35mm	JH6	3000


Embossed Carrier Tape & Reel Specification – UDFN-08

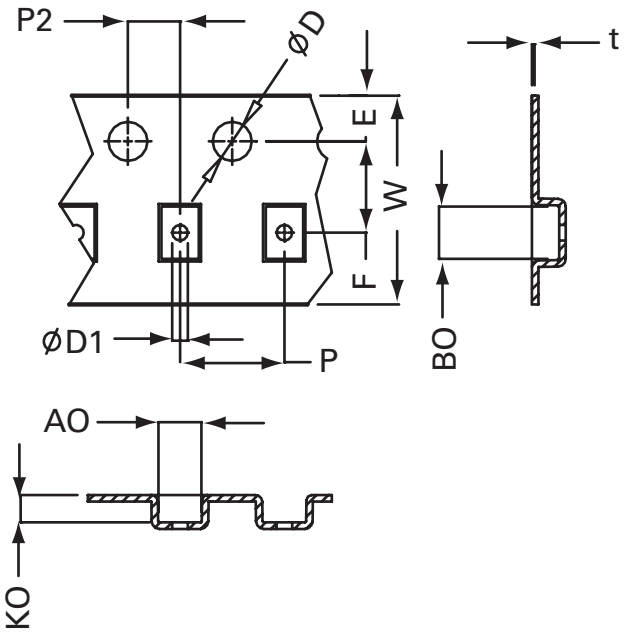

Symbol	Millimetres		Inches	
	Min	Max	Min	Max
E	1.65	1.85	0.065	0.073
F	3.45	3.55	0.136	0.140
D1	1.00	-	0.040	-
D	1.50 min		0.059 min	
P	3.90	4.10	0.154	0.161
10P	40.0 +/- 0.20		1.575 +/- 0.008	
W	7.70	8.30	0.303	0.327
P2	1.95	2.05	0.077	0.081
A0	1.55	1.75	0.061	0.069
B0	1.90	2.1	0.075	0.083
K0	0.95	1.15	0.037	0.045
t	0.30 max		0.012 max	

©2009 Littelfuse, Inc.
Specifications are subject to change without notice.
Please refer to http://www.littelfuse.com for current information.

Embossed Carrier Tape & Reel Specification – UDFN-12

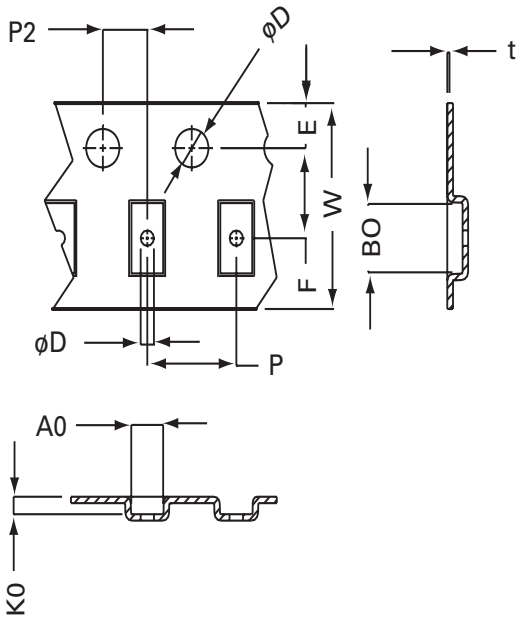

Symbol	Millimetres		Inches	
	Min	Max	Min	Max
E	1.65	1.85	0.065	0.073
F	3.45	3.55	0.136	0.140
D1	0.55	0.65	0.021	0.025
D	1.50 min		0.059 min	
P	3.90	4.10	0.154	0.161
10P	40.0 +/- 0.20		1.575 +/- 0.008	
W	7.90	8.30	0.311	0.327
P2	1.95	2.05	0.077	0.081
A0	1.33	1.53	0.052	0.060
B0	2.63	2.83	0.103	0.111
K0	0.58	0.78	0.023	0.031
t	0.22 max		0.009 max	

©2009 Littelfuse, Inc.
Specifications are subject to change without notice.
Please refer to http://www.littelfuse.com for current information.