

**P/N:S5779 DATA SHEET**

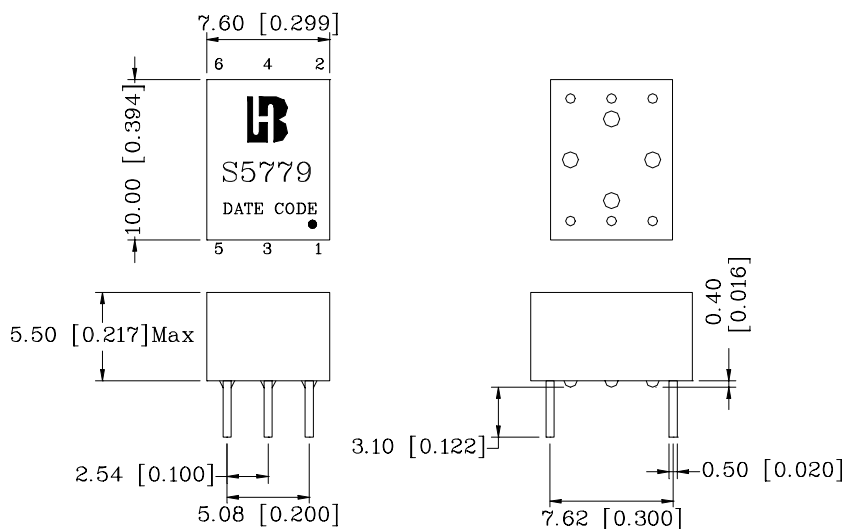
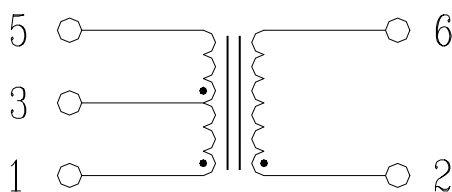
Page : 1/1

Feature

- Fast rise time compatible with standards.
- Through hole package available.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +125°C.

Electrical Specifications@25°C

Part Number	Turns Ratio (±2%)	OCL (uH Min)	C _{WW} (pF Max)	L.L (uH Max)	Primary Pin	HI-POT (Vrms)
S5779	1:4CT	150	15	0.30	2-6	1500

Schematic**Mechanical**

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]

0.xx±0.05[0.002]