

Caps for Holder FEU (Grip)



250 VAC · 20 A (UL/CSA)



### Standards

- IEC 60127-6
- UL 4248-1 / UL 512
- CSA C22.2 no. 39

### Approvals

- VDE Certificate Number: 134125
- UL File Number: E39328

### References

Mating Cap to FEU (Grip)

### Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)



### Technical Data

Fuse-Link	5 x 20 or 6.3 x 32 mm
Rated Voltage	250 VAC
Rated current	10 A (VDE), 20 A (UL/CSA)
Degree of Protection	IP 40
Admissible Ambient Air Temp.	-40 °C to 85 °C
Material: Cap	Thermoplastic
Storage Conditions	0 °C to 60 °C, max. 70% r.h.

Contact Resistance	< mΩ at 20 mV
--------------------	---------------

### Dimension

29.5 mm

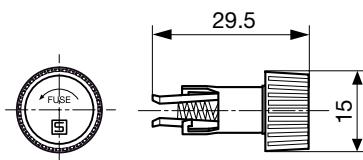

### All Variants

Cap	Fuse-Link	Degree of Protection	Order Number
Fingergrip	6.3 x 32mm	IP 40	0031.1812
Fingergrip	5 x 20mm	IP 40	0031.1811

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

### Packaging Unit

Plastic Bag (100 pcs.)