# Printed-circuit board connector - MVSTBW 2,5/16-ST-5,08 - 1792896

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://download.phoenixcontact.com)



The figure shows a 10-position version of the product

Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 16, Pitch: 5.08 mm, Connection method: Screw connection, Color: green, Contact surface: Tin

## Why buy this product

- For larger numbers of positions up to 24-pos., visit: www.phoenixcontact.net/catalog
- MSTB plugs for vertical plug-in direction
- Conductor entry on the rippled side of the plug

## Key commercial data

| | |
|---|---|
| Packing unit | 1 |
| Minimum order quantity | 50 |
| Catalog page | Page 241 (CC-2011) |
| GTIN | 4 017918 045326 |
| Custom tariff number | 85366990 |
| Country of origin | GERMANY |

## Technical data

### Dimensions / positions

| | |
|---|---|
| Pitch | 5.08 mm |
| Dimension a | 76.2 mm |
| Number of positions | 16 |
| Screw thread | M3 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

### Technical data

| | |
|---|---|
| Range of articles | MVSTBW 2,5/..-ST |
| Insulating material group | I |
| Rated surge voltage (III/3) | 4 kV |

# Printed-circuit board connector - MVSTBW 2,5/16-ST-5,08 - 1792896

## Technical data

### Technical data

| | |
|---|---|
| Rated surge voltage (III/2) | 4 kV |
| Rated surge voltage (II/2) | 4 kV |
| Rated voltage (III/2) | 320 V |
| Rated voltage (II/2) | 630 V |
| Connection in acc. with standard | EN-VDE |
| Nominal current IN | 12 A |
| Nominal voltage UN | 250 V |
| Nominal cross section | 2.5 mm² |
| Maximum load current | 12 A |
| Insulating material | PA |
| Inflammability class according to UL 94 | V0 |
| Internal cylindrical gage | A3 |
| Stripping length | 7 mm |
| Nominal voltage, UL/CUL Use Group B | 300 V |
| Nominal current, UL/CUL Use Group B | 15 A |
| Nominal voltage, UL/CUL Use Group D | 300 V |
| Nominal current, UL/CUL Use Group D | 15 A |

### Connection data

| | |
|---|---|
| Conductor cross section solid min. | 0.2 mm² |
| Conductor cross section solid max. | 2.5 mm² |
| Conductor cross section stranded min. | 0.2 mm² |
| Conductor cross section stranded max. | 2.5 mm² |
| Conductor cross section stranded, with ferrule without plastic sleeve min. | 0.25 mm² |
| Conductor cross section stranded, with ferrule without plastic sleeve max. | 2.5 mm² |
| Conductor cross section stranded, with ferrule with plastic sleeve min. | 0.25 mm² |
| Conductor cross section stranded, with ferrule with plastic sleeve max. | 2.5 mm² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |
| 2 conductors with same cross section, solid min. | 0.2 mm² |
| 2 conductors with same cross section, solid max. | 1 mm² |
| 2 conductors with same cross section, stranded min. | 0.2 mm² |
| 2 conductors with same cross section, stranded max. | 1.5 mm² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. | 0.25 mm² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max. | 1 mm² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm² |

# Printed-circuit board connector - MVSTBW 2,5/16-ST-5,08 - 1792896

## Technical data

### Connection data

| | |
|---|---|
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 1.5 mm² |
| Minimum AWG according to UL/CUL | 30 |
| Maximum AWG according to UL/CUL | 12 |

## Classifications

### eclass

| | |
|---|---|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |

### etim

| | |
|---|---|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002638 |
| ETIM 5.0 | EC002638 |

### unspsc

| | |
|---|---|
| UNSPSC 6.01 | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11 | 39121409 |
| UNSPSC 12.01 | 39121409 |
| UNSPSC 13.2 | 39121409 |

## Approvals

### Approvals

Approvals

CSA / UL Recognized / VDE report with production monitoring / cUL Recognized / GOST / IECEE CB Scheme / GOST / cULus Recognized

Ex Approvals

Approvals submitted

### Approval details

# Printed-circuit board connector - MVSTBW 2,5/16-ST-5,08 - 1792896

## Approvals

CSA

| | B | D |
|---|---|---|
| mm²/AWG/kcmil | 28-12 | 28-12 |
| Nominal current IN | 10 A | 10 A |
| Nominal voltage UN | 300 V | 300 V |

UL Recognized

| | B | D |
|---|---|---|
| mm²/AWG/kcmil | 30-12 | 30-12 |
| Nominal current IN | 15 A | 15 A |
| Nominal voltage UN | 300 V | 150 V |

VDE report with production monitoring

| | |
|---|---|
| mm²/AWG/kcmil | 0.2-2.5 |
| Nominal current IN | 12 A |
| Nominal voltage UN | 250 V |

cUL Recognized

| | B | D |
|---|---|---|
| mm²/AWG/kcmil | 30-12 | 30-12 |
| Nominal current IN | 15 A | 15 A |
| Nominal voltage UN | 300 V | 150 V |

GOST

IECEE CB Scheme

| | |
|---|---|
| mm²/AWG/kcmil | 0.2-2.5 |
| Nominal current IN | 12 A |
| Nominal voltage UN | 250 V |

# Printed-circuit board connector - MVSTBW 2,5/16-ST-5,08 - 1792896

## Approvals

GOST

cULus Recognized

## Accessories

### Accessories

### Marking

Marker cards - SK 5,08/3,8:UNBEDRUCKT - 0805412



Marker cards, Card, white, Unlabeled, Can be labeled with: Thermomark R, Thermomark X, Thermomark S, Mounting type: Adhesive, For terminal block width: 5.08 mm

Marker cards - SK 5,08/3,8:FORTL.ZAHLEN - 0804293



Marker cards, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - (99)100, Mounting type: Adhesive, For terminal block width: 5.08 mm

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

### Plug/Adapter

Keying star - CR-MSTB - 1734401



Coding section, inserted into the recess in the header or the inverted plug, red insulating material

# Printed-circuit board connector - MVSTBW 2,5/16-ST-5,08 - 1792896

## Accessories

Coding profile - CP-MSTB - 1734634



Keying profile, is inserted into the slot on the plug or inverted header, red insulating material

### Tools

Screwdriver - SZS 0,6X3,5 - 1205053



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

### Additional products

Plug-in block - UMSTBVK 2,5/16-G-5,08 - 1788253



Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 16, Pitch: 5.08 mm, Connection method: Screw connection, Color: green, Contact surface: Tin, Assembly: DIN rail

Base strip - MSTBVK 2,5/16-G-5,08 - 1788868



Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 16, Pitch: 5.08 mm, Connection method: Screw connection, Color: green, Contact surface: Tin, Assembly: DIN rail

Base strip - MVSTBU 2,5/16-GB-5,08 - 1788677



Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 16, Pitch: 5.08 mm, Connection method: Screw connection, Color: green, Contact surface: Tin, Assembly: Direct mounting

# Printed-circuit board connector - MVSTBW 2,5/16-ST-5,08 - 1792896

## Accessories

Feed-through terminal block - UK 3D-MSTBV-5,08 - 3002131



Feed-through terminal block, Connection method: Special and hybrid connection, Cross section: 0.2 mm² - 4 mm², AWG: 24 - 12, Width: 5.08 mm, Color: gray, Mounting type: NS 32, NS 35/15, NS 35/7.5

---

Feed-through terminal block - UK 3-MVSTB-5,08-LA 24RD - 3002102



Feed-through terminal block, Nominal current: 12 A, Nominal voltage: 250 V, Cross section: 0.2 mm² - 4 mm², AWG: 24 - 12, Mounting type: NS 32, NS 35/15, NS 35/7.5, Pitch: 5.08 mm, Width: 5.08, Color: gray

---

Feed-through terminal block - UK 3-MVSTB-5,08 - 3002076



Feed-through terminal block, Nominal current: 12 A, Nominal voltage: 250 V, Cross section: 0.2 mm² - 4 mm², AWG: 24 - 12, Mounting type: NS 32, NS 35/15, NS 35/7.5, Pitch: 5.08 mm, Width: 5.1, Color: gray

---

Base strip - EMSTBA 2,5/16-G-5,08 - 1880449



Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 16, Pitch: 5.08 mm, Color: green, Contact surface: Tin, Assembly: Press-in

---

Base strip - EMSTBVA 2,5/16-G-5,08 - 1859658



Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 16, Pitch: 5.08 mm, Color: green, Contact surface: Tin, Assembly: Press-in

---

# Printed-circuit board connector - MVSTBW 2,5/16-ST-5,08 - 1792896

## Accessories

Printed-circuit board connector - FKIC 2,5/16-ST-5,08 - 1873498



Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 16, Pitch: 5.08 mm, Connection method: Spring-cage conn., Color: green, Contact surface: Tin

---

Base strip - MSTBA 2,5/16-G-5,08-LA - 1768082



Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 16, Pitch: 5.08 mm, Color: green, Contact surface: Tin, Assembly: Soldering

---

Base strip - MSTBA 2,5/16-G-5,08 - 1757381



Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 16, Pitch: 5.08 mm, Color: green, Contact surface: Tin, Assembly: Soldering

---

Base strip - MSTB 2,5/16-G-5,08-LA - 1770850



Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 16, Pitch: 5.08 mm, Color: green, Contact surface: Tin, Assembly: Soldering

---

Base strip - MDSTBV 2,5/16-G1-5,08 - 1762648



Header, Nominal current: 10 A, Rated voltage (III/2): 320 V, Number of positions: 16, Pitch: 5.08 mm, Color: green, Contact surface: Tin, Assembly: Soldering, In combination with MVSTB or FKCV plug components, both an MVSTBW (or FKCVW) and an MVSTBR plug (or FKCVR) must be used. Combination with TMSTBP plug components is not possible!

---

# Printed-circuit board connector - MVSTBW 2,5/16-ST-5,08 - 1792896

## Accessories

Base strip - MDSTB 2,5/16-G1-5,08 - 1762509



Header, Nominal current: 10 A, Rated voltage (III/2): 320 V, Number of positions: 16, Pitch: 5.08 mm, Color: green, Contact surface: Tin, Assembly: Soldering, In combination with MVSTB or FKCV plug components, both an MVSTBW (or FKCVW) and an MVSTBR plug (or FKCVR) must be used. Combination with TMSTBP plug components is not possible!

Base strip - SMSTBA 2,5/16-G-5,08 - 1767517



Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 16, Pitch: 5.08 mm, Color: green, Contact surface: Tin, Assembly: Soldering

Base strip - SMSTB 2,5/16-G-5,08 - 1769609



Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 16, Pitch: 5.08 mm, Color: green, Contact surface: Tin, Assembly: Soldering


Printed-circuit board connector - ICC 2,5/16-STZ-5,08 - 1823985



Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 16, Pitch: 5.08 mm, Connection method: Crimp connection, Color: green, Corresponding male crimp contacts with current [A] and conductor cross section range [mm²] data: 10A/ICC-MT 0,5-1,0 (3190577); 10A/ICC-MT 0,5-1,0 BA (3190603); 12A/ICC-MT 1,5-2,5 (3190580); 12A/ICC-MT 1,5-2,5 BA (3190593). BA = Bandkontakte

## Drawings

Dimensioned drawing

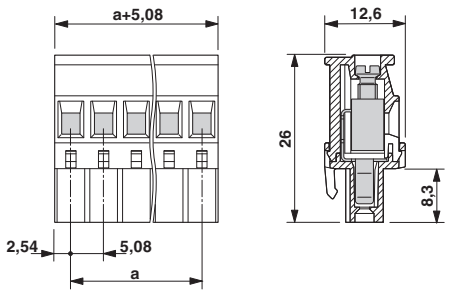

© Phoenix Contact 2012 - all rights reserved
http://www.phoenixcontact.com