
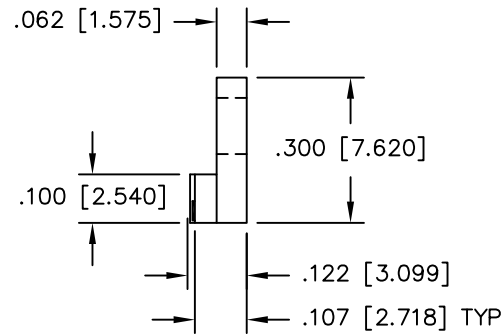


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
3715	A	INITIAL RELEASE	DG	6-12
6226	B	SEE DAR	DG	5-16

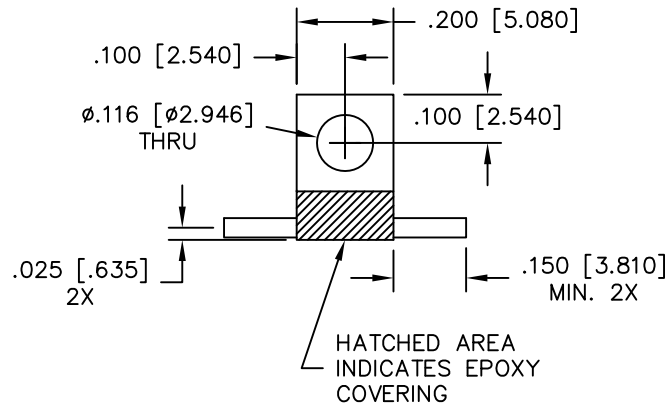


NOTES:

- LEADS 99.99% PURE SILVER
.040 [1.016] WIDE X .005 [.127] THICK.
- SUBSTRATE MATERIAL: BeO
COVER MATERIAL: EPOXY
- FLANGE MATERIAL: COPPER
PLATING: NICKEL

ELECTRICAL SPECIFICATIONS

NOMINAL IMPEDANCE: 50 OHMS
FREQUENCY: DC - 6.0 GHz.
VSWR: 1.30:1
INPUT POWER: 10 WATTS
TEMPERATURE: -55°C TO 150°C

PART NO.	VALUE	TOLERANCE
IPP-AB201-2	2 dB	±.50 dB
IPP-AB201-4	4 dB	±.50 dB
IPP-AB201-6	6 dB	+0.75 -0.50 dB
IPP-AB201-7	7 dB	+0.75 -0.50 dB
IPP-AB201-8	8 dB	+0.75 -0.50 dB
IPP-AB201-9	9 dB	+1.00 -0.50 dB
IPP-AB201-10	10 dB	+1.00 -0.50 dB
IPP-AB201-11	11 dB	+1.00 -0.50 dB
IPP-AB201-20	20 dB	+1.50 -0.50 dB

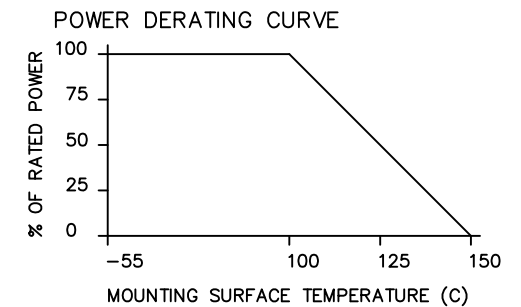

MATERIAL	DWN S.Cornell	DATE	6-8-12	Innovative Power Products		
FINISH	ENG DG	DATE	6-12			
TOLERANCE	MANUF	DATE		TITLE ATTENUATOR, 10 WATT, FLANGE		
IN [MM]	CAGE CODE: 437R2	SHEET OF	SCALE			
.XX ±.02 [.50] .XXX ±.010 [.254]		1 1	4:1	SIZE B	P/N IPP-AB201-XX	REV. B