

NON-ISOLATED DC/DC CONVERTERS

3.0 Vdc - 5.5 Vdc Input

12 Vdc/0.8 A & 15 Vdc/0.6 A Output

bel
POWER PRODUCTS

xRAH-01FXx0 Series

RoHS Compliant

- Non-Isolated
- Fixed Frequency (550 kHz)
- High Efficiency
- Low Profile Package
- Trim Function (option)
- Allows Burst Mode Operation at Low Load Currents
- UL60950 Recognized (UL/cUL)



Description

The Bel xRAH-01FXx0 is part of the low cost non-isolated dc/dc converter series. The modules use a surface mount package or vertical package for ease of layout and space savings. The output is closely regulated and the efficiency of 12 Vdc output module is typically 88% at full load. Typical features include burst mode operation at light load and trim function (option).

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Part Number Surface Mount	Part Number Vertical Mount
12 Vdc	3.0 Vdc - 5.5 Vdc	0.8 A	9.6 W	88%	SRAH-01FX20	VRAH-01FX20
15 Vdc	3.0 Vdc - 5.5 Vdc	0.6 A	9.0 W	88%	SRAH-01FX50	VRAH-01FX50

Note: Add "0" suffix at the end of the model number to indicate "Tube Packaging", and "R" for "Reel Packaging", and "G" for "Tray Packaging".

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	2.8 V	-	6 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-40 °C	-	125 °C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	3 V	-	5.5 V	
Input Current (full load)				
	V _o =12 V	-	4.3 A	
	V _o =15 V	-	4.0 A	
Input Reflected Ripple Current (pk-pk)	-	100 mA	150 mA	With simulated source impedance of 500 nH, 5 Hz to 20 MHz; Use 270 uF/16 V Oscon capacitor with ESR = 0.018 ohm max. at 100 kHz
Input Reflected Ripple Current (rms)	-	30 mA	60 mA	
I ² t Inrush Current Transient	-	0.02 A ² s	0.05 A ² s	
Turn-on Voltage Threshold	-	2.8 V	2.9 V	

Note: All specifications are typical at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

3.0 Vdc - 5.5 Vdc Input

12 Vdc/0.8 A & 15 Vdc/0.6 A Output



Output Specifications

Parameter	Min	Typ	Max	Notes		
Output Voltage Set Point Vo=12 V Vo=15 V	11.580 V 14.475 V	12 V 15 V	12.420 V 15.525 V	Test condition: Vin=5 V, Iout=full load		
Line Regulation Vo=12 V Vo=15 V	- -	20 mV 20 mV	40 mV 40 mV			
Load Regulation Vo=12 V Vo=15 V	- -	60 mV 75 mV	120 mV 150 mV			
Regulation Over Temperature (-40 °C to +85 °C) Vo=12 V Vo=15 V	- -	45 mV 60 mV	80 mV 100 mV			
Output Current Vo=12 V Vo=15 V	0 A 0 A	- -	0.8 A 0.6 A			
Ripple and Noise (rms) Vo=12 V; Io=0 A Vo=15 V; Io=0 A Vo=12 V; Io=0.8 A Vo=15 V; Io=0.6 A	- - - -	5 mV 5 mV 20 mV 30 mV	10 mV 10 mV 40 mV 50 mV	Test conditions: BW = 0-20 MHz; 1uF ceramic cap and 33 uF Tantalum capacitor at the output.		
Ripple and Noise (pk-pk) Vo=12 V; Io=0 A Vo=15 V; Io=0 A Vo=12 V; Io=0.8 A Vo=15 V; Io=0.6 A	- - - -	20 mV 20 mV 60 mV 80 mV	40 mV 40 mV 100 mV 120 mV			
Rise Time	-	5 mS	-			
Overshoot at Turn on	-	0%	5%			
Output Capacitance	33 uF	-	330 uF	The min output capacitance is 33 uF Tantalum capacitor at the output		
Transient Response						
50% ~ 100% Max Load	Overshoot	All Outputs	-	130 mV	200 mV	di/dt = 0.1 A/uS; Vin = 5 V; and with 33 uF Tantalum capacitor at the output.
	Settling Time		-	100 uS	200 uS	
100% ~ 50% Max Load	Overshoot		-	130 mV	200 mV	
	Settling Time		-	100 uS	200 uS	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

3.0 Vdc - 5.5 Vdc Input

12 Vdc/0.8 A & 15 Vdc/0.6 A Output



General Specifications


Parameter	Min	Typ	Max	Notes
Efficiency Vo=12 V Vo=15 V	84% 84%	88% 88%	- -	Measured at Vin=5 V, full load
Switching Frequency	500 kHz	550 kHz	650 kHz	
Output Trim Range	90% Vo	-	110% Vo	
MTBF	13,684,605 hours			Calculated Per Bell Core SR-332 (Vin=5 V; Vo=12 V; Io = 0.64 A; Ta = 25 °C)
Dimensions (surface mount) Inches (L x W x H) Millimeters (L x W x H)	0.78 x 0.7 x 0.32 19.81 x 17.78 x 8.13			
Dimensions (vertical) Inches (L x W x H) Millimeters (L x W x H)	0.7 x 0.308 x 0.65 17.78 x 7.82 x 16.51			
Weight	-	5.2 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.


Output Trim Equations

Equations for calculating the trim resistor (in kΩ) given the desired adjusted voltage (Vadj) and the nominal output voltage of the converter (Vnom) are shown below. The Trim Down resistor should be connected between the Trim pin and Vout. The Trim Up resistor should be connected between the Trim pin and Ground. Only one of the resistors should be used for any given application.

$$R_{trim-down} = \frac{A}{V_{nom} - V_{adj}} - B$$

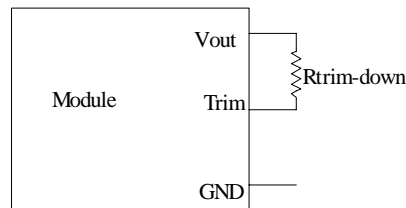

$$R_{trim-up} = \frac{C}{V_{adj} - V_{nom}} - D$$

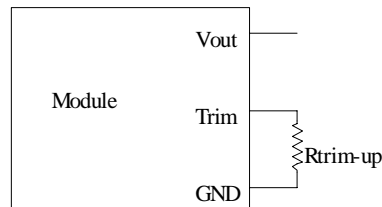

Vnom	A	B	C	D
12	164.640	21.850	11.760	7.150
15.055	209.542	20.600	11.760	5.900


NON-ISOLATED DC/DC CONVERTERS

3.0 Vdc - 5.5 Vdc Input


12 Vdc/0.8 A & 15 Vdc/0.6 A Output



Efficiency Data

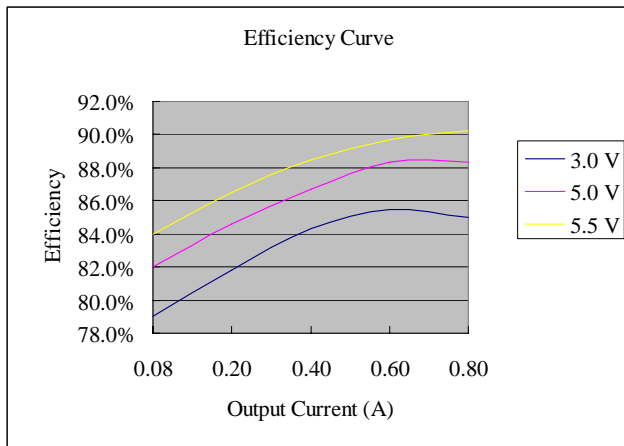


xRAH-01FX20

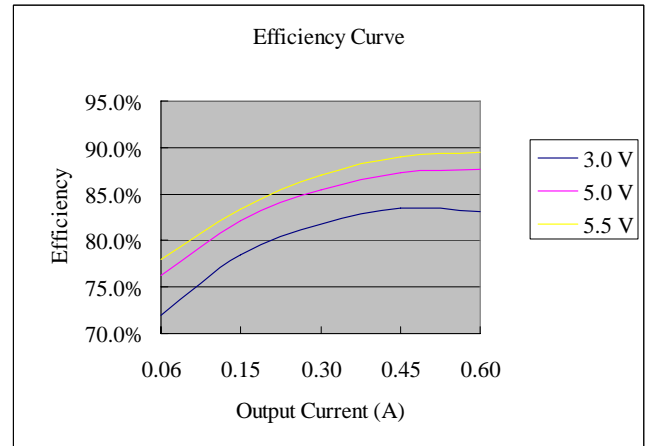


xRAH-01FX50

Thermal Derating Curves

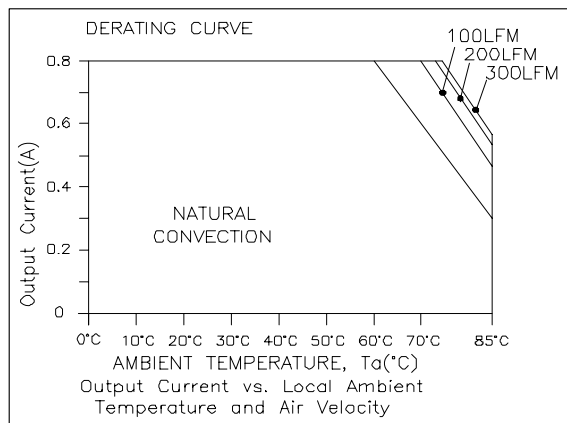

xRAH-01FX20

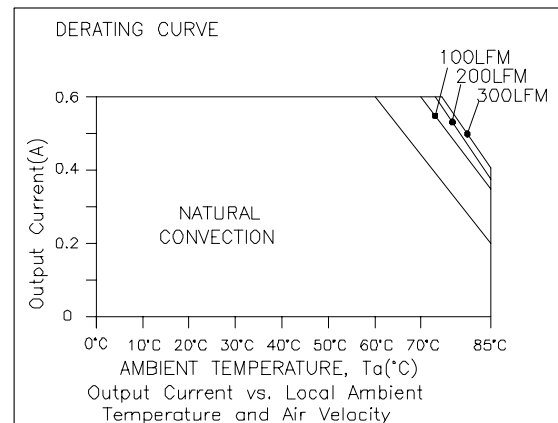

xRAH-01FX50


NON-ISOLATED DC/DC CONVERTERS

3.0 Vdc - 5.5 Vdc Input


12 Vdc/0.8 A & 15 Vdc/0.6 A Output




Ripple and Noise Waveforms

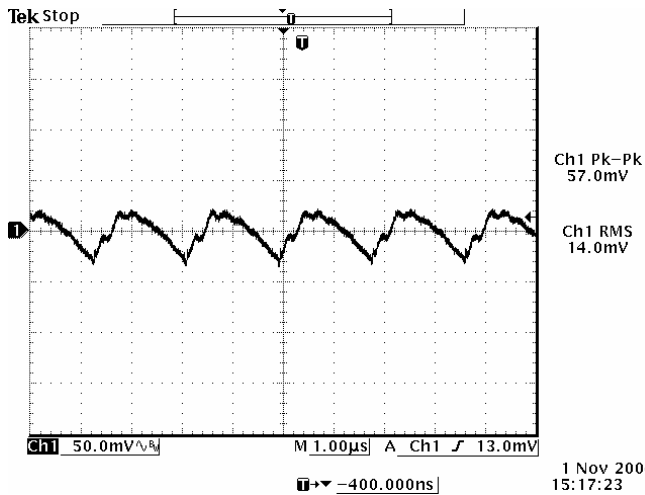


Ripple and noise at full load, $V_{in}=5\text{ V}$, $V_o=12\text{ V}$

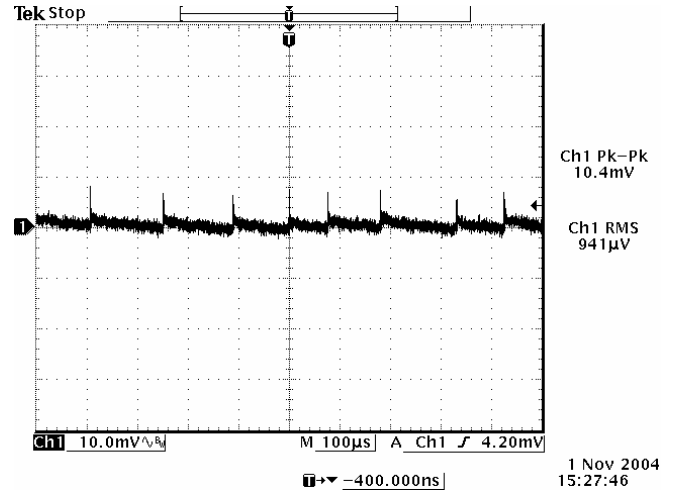

Ripple and noise at no load, $V_{in}=5\text{ V}$, $V_o=12\text{ V}$

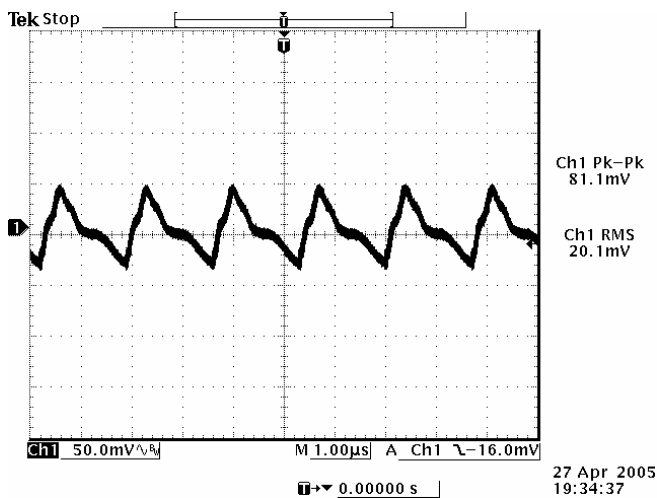

Ripple and noise at full load, $V_{in}=5\text{ V}$, $V_o=15\text{ V}$

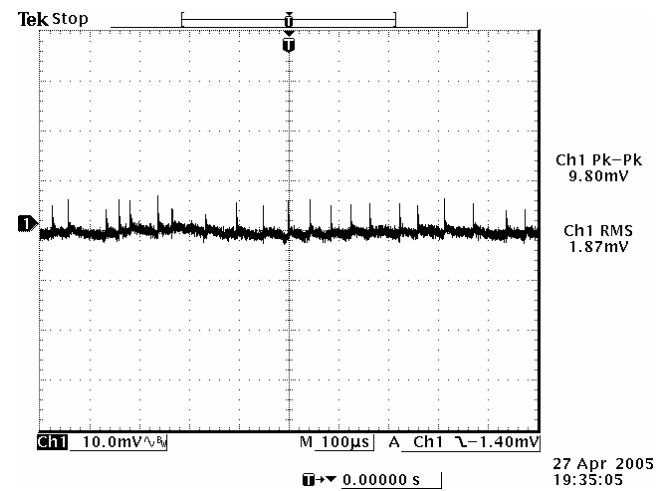

Ripple and noise at no load, $V_{in}=5\text{ V}$, $V_o=15\text{ V}$

Note: Ripple and noise tested with 1 μF ceramic capacitor and 33 μF tantalum capacitor at the output, $T_a=25\text{ deg C}$.


NON-ISOLATED DC/DC CONVERTERS

3.0 Vdc - 5.5 Vdc Input


12 Vdc/0.8 A & 15 Vdc/0.6 A Output




Transient Response Waveforms

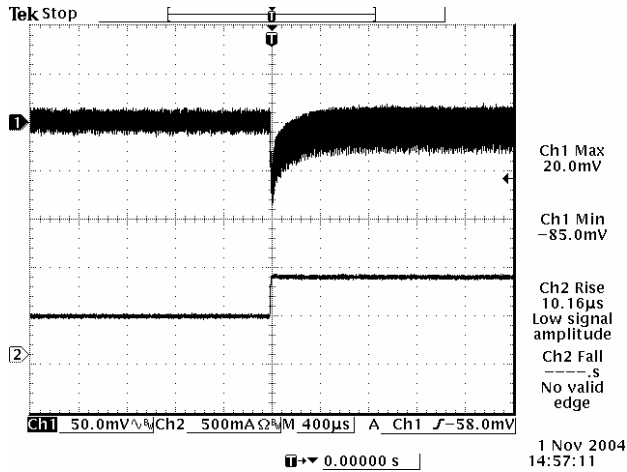


50% to 100% load transient at $V_{in}=5\text{ V}$, $V_o=12\text{ V}$

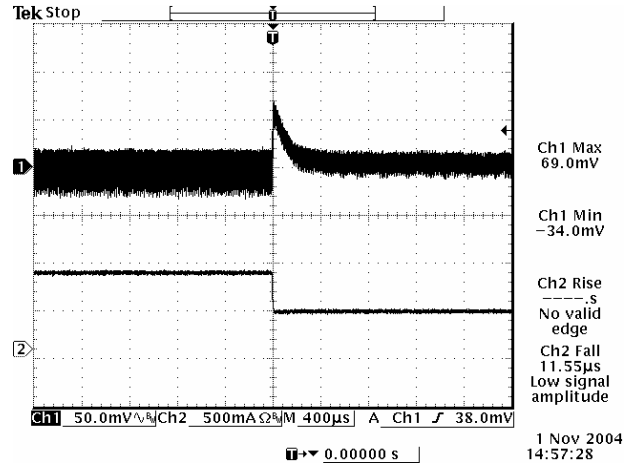

100% to 50% load transient at $V_{in}=5\text{ V}$, $V_o=12\text{ V}$

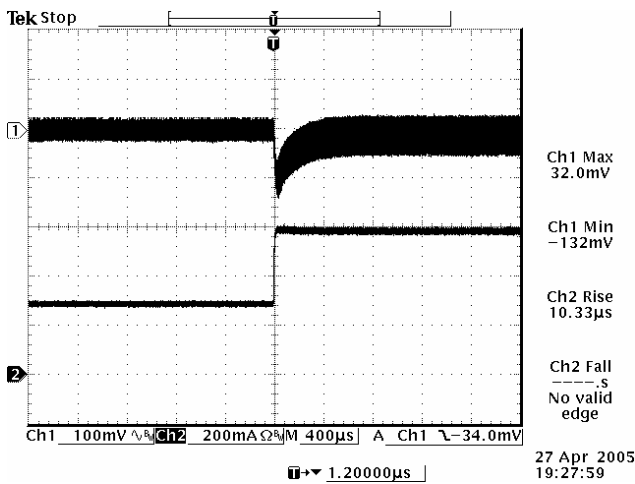

50% to 100% load transient at $V_{in}=5\text{ V}$, $V_o=15\text{ V}$

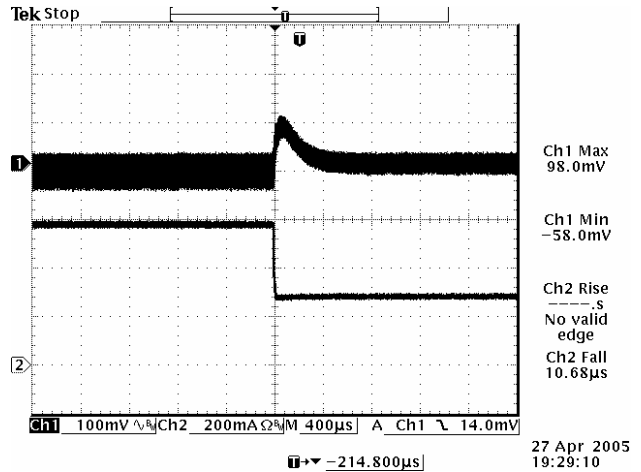

100% to 50% load transient at $V_{in}=5\text{ V}$, $V_o=15\text{ V}$

Note: Transient response tested at $di/dt=0.1\text{ A/uS}$, with an external 33 μF tantalum load capacitor at the output, and $T_a=25\text{ deg C}$.

NON-ISOLATED DC/DC CONVERTERS


3.0 Vdc - 5.5 Vdc Input

12 Vdc/0.8 A & 15 Vdc/0.6 A Output



Mechanical Outline


SRAH-01FXx0

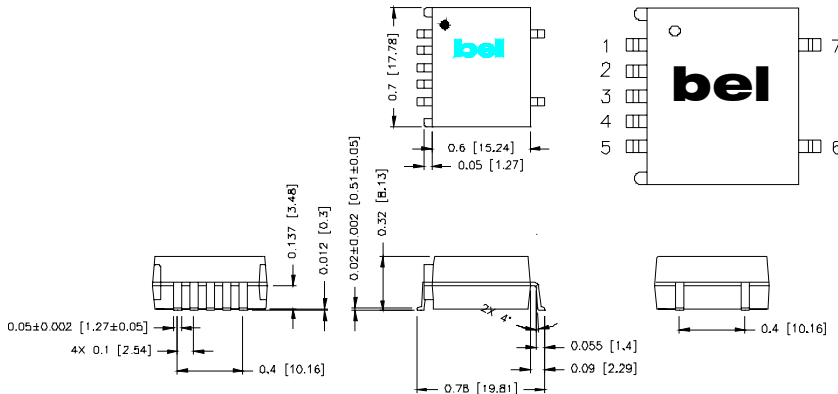

Pin Connections

Pin	Function
1	N/A
2	Vin
3	Ground
4	Vout
5	Trim
6	N/A
7	N/A


VRAH-01FXx0

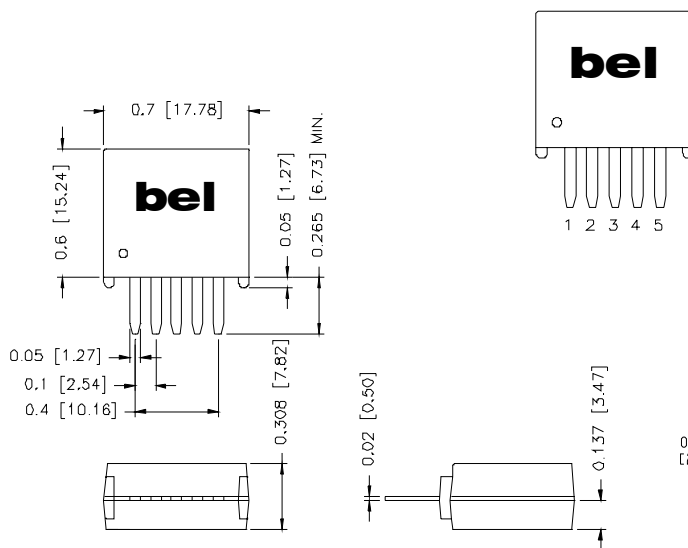

Pin Connections

Pin	Function
1	N/A
2	Vin
3	Ground
4	Vout
5	Trim

RECOMMENDED PCB PAD LAYOUT

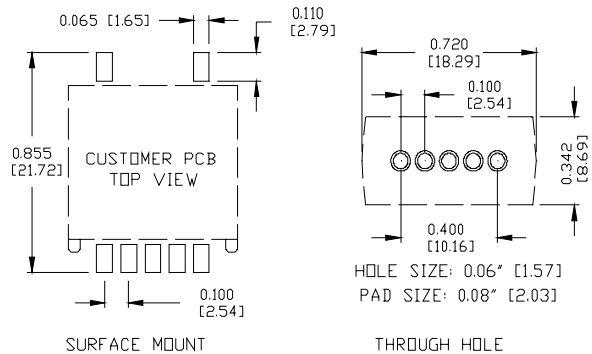

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products. These parts are not however compatible with the higher temperatures associated with lead free solder processes and must be soldered using a reflow profile with a peak temperature of no more than 240 °C.



©2006 Bel Fuse Inc. Specifications subject to change without notice. 032806

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com