
PxxxxSA Series

Rev.2.0

DESCRIPTION:


PxxxxSA series thyristors are a type of semi-conduct component. They are designed to protect baseband equipment from damaging overvoltage transients. such as modems, telephones, line cards, answering machines, FAX machines, T1/E1, xDSL and more.



SMA

FEATURES:

- ✧ Excellent capability of absorbing transient surge
- ✧ Quick response to surge voltage (ns Level)
- ✧ Eliminates overvoltage caused by fast rising transients
- ✧ Moisture sensitivity level: Level 1
- ✧ Fails short circuit when surged in excess of ratings
- ✧ Non degenerative




Symbol

ABSOLUTE MAXIMUM RATINGS (T_A=25ºC, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage temperature range	T_{stg}	-60 to +150	℃
Operating junction temperature range	T_j	-40 to +125	℃
Repetitive peak pulse current	I_{PP}	50	A

ELECTRICAL CHARACTERISTICS (T_A=25℃)

Symbol	Parameter
V_{DRM}	Peak off-state voltage
I_{DRM}	Off-state current
V_S	Switching voltage
I_S	Switching current
V_T	On-state voltage
I_T	On-state current
I_H	Holding current
C_O	Off-state capacitance

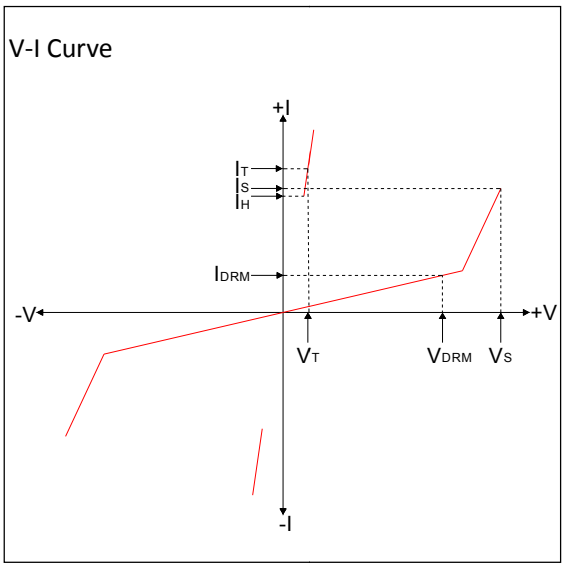

ELECTRICAL CHARACTERISTICS (T_A=25℃， continued)

Part Number	I_{DRM}@V_{DRM}		V_S①@I_S		V_T@ I_T		I_H	C_O②	Marking
	μA	V	V	mA	V	A	mA	pF	
	max	min	max	max	max	max	min	max	
P0080SA	5	6	25	800	4	2.2	20	80	P-8A
P0220SA	5	15	32	800	4	2.2	20	60	P22A
P0300SA	5	25	40	800	4	2.2	50	60	P03A
P0640SA	5	58	77	800	4	2.2	120	50	P06A
P0720SA	5	65	87	800	4	2.2	120	50	P07A
P0900SA	5	75	98	800	4	2.2	120	50	P09A
P1100SA	5	90	130	800	4	2.2	120	45	P11A
P1300SA	5	120	160	800	4	2.2	120	45	P13A
P1500SA	5	140	180	800	4	2.2	120	45	P15A
P1800SA	5	170	220	800	4	2.2	120	35	P18A
P2300SA	5	190	260	800	4	2.2	120	35	P23A
P2600SA	5	220	300	800	4	2.2	120	35	P26A
P3100SA	5	275	350	800	4	2.2	120	35	P31A
P3500SA	5	320	400	800	4	2.2	120	35	P35A
P3800SA	5	340	450	800	4	2.2	120	35	P38A


① Vs is measured at 100KV/s

② Off-state capacitance is measured in V_{DC}=2V, V_{RMS}=1V, f=1MHz


Surge Ratings

Series	I_{PP}（A）min			
	2×10us	8×20us	10×360us	10×1000us
A	150	150	70	50

ORDERING INFORMATION

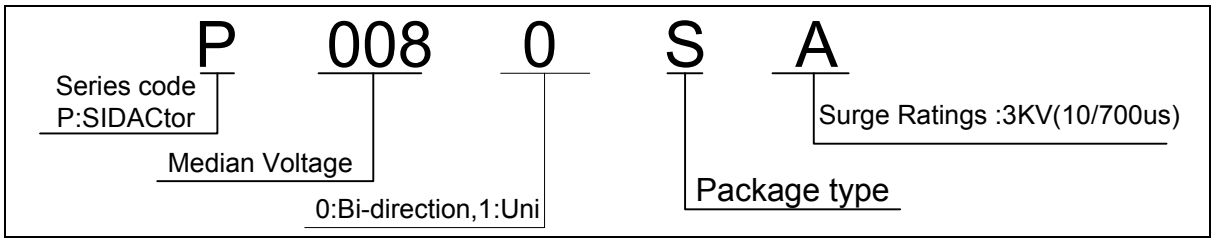

MARKING

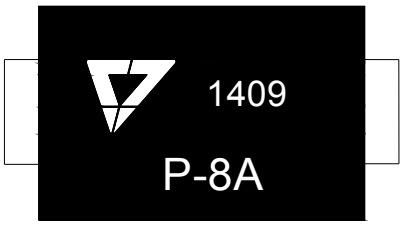

P-8A : Device Marking Code
1409: In ninth week, 2014

SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see FIG.2)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150℃
	-Temperature Max($T_{s(max)}$)	+200℃
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3℃/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3℃/sec. Max
Reflow	-Temperature(T_L) (Liquid us)	+217℃
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_p)		+260(+0/-5)℃
Time within 5℃ of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6℃/sec. Max
Time 25℃ to Peak Temp (T_P)		8 min. Max
Do not exceed		+260℃

FIG.1: tr × td pulse waveform

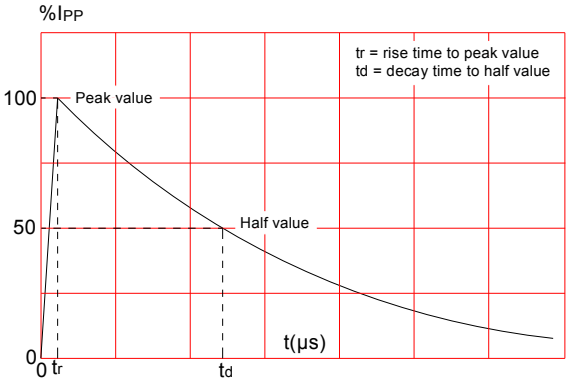


FIG.2: Reflow condition

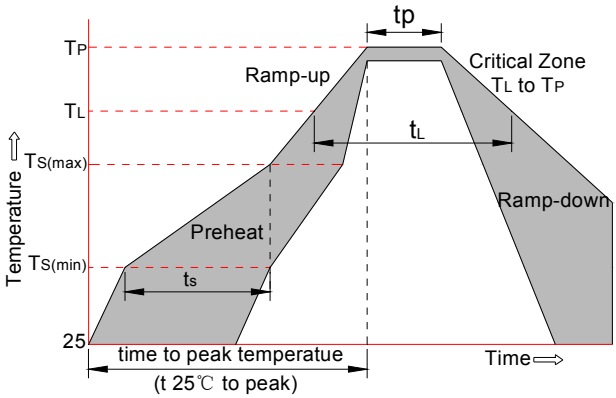


FIG.3: Normalized Vs change vs. junction temperature



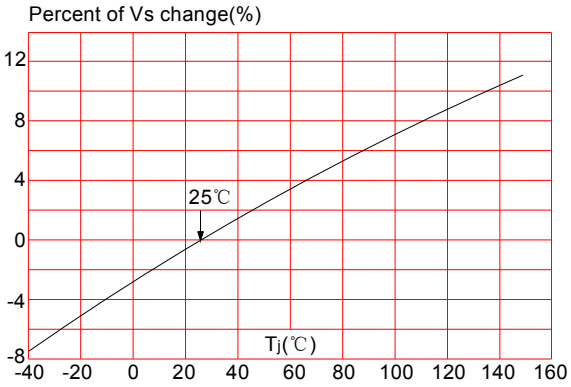


FIG.4: Normalized DC holding current vs. case temperature

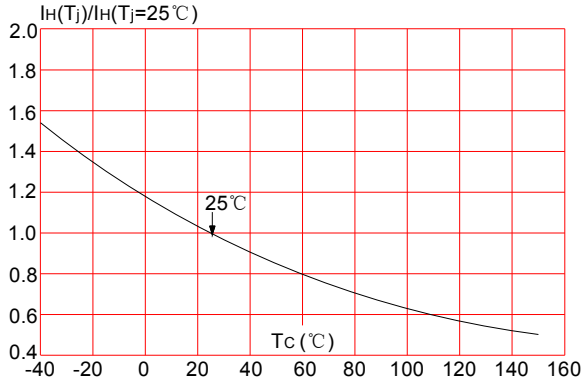


PACKAGE MECHANICAL DATA

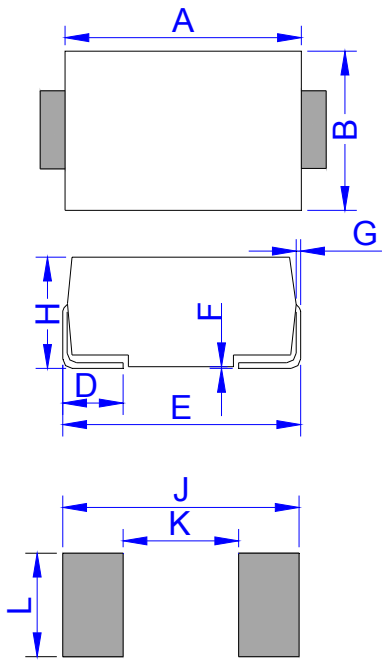

DO-214AC (SMA)

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.25	4.65	0.167	0.183
B	2.50	2.90	0.098	0.114
C	1.35	1.65	0.053	0.065
D	0.76	1.52	0.030	0.060
E	4.93	5.28	0.194	0.208
F	0.051	0.203	0.002	0.008
G	0.15	0.31	0.006	0.012
H	1.98	2.41	0.078	0.095
J	6.50		0.256	
K		2.30		0.090
L	1.70		0.067	

TAPE AND REEL SPECIFICATION-SMA

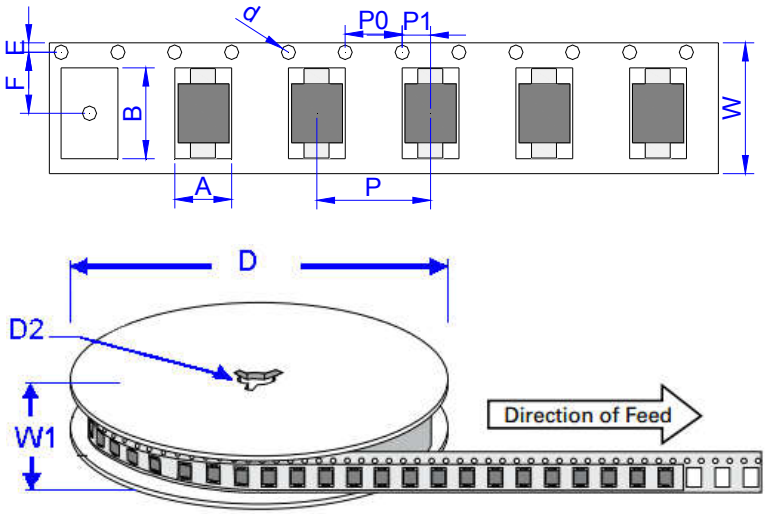

Ref.	Dimensions	
	Millimeters	Inches
A	2.79 ± 0.3	0.110 ± 0.012
B	5.33 ± 0.3	0.210 ± 0.012
d	1.5 ± 0.1	0.059 ± 0.004
D	330.0	13.0
D2	13 ± 1	0.512 ± 0.039
E	1.5 ± 0.2	0.059 ± 0.008
F	5.65 ± 0.2	0.222 ± 0.008
P	4.0 ± 0.2	0.157 ± 0.008
P0	4.0 ± 0.2	0.157 ± 0.008
P1	2.0 ± 0.2	0.079 ± 0.008
W	12.0 ± 0.2	0.472 ± 0.008
W1	16.8 ± 2.0	0.661 ± 0.079

OUTLINE	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)
TAPING	5,000	80,000	330

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.
This document is the first version which is made in 4-May.-2015. This document supersedes and replaces all information previously supplied.

is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright ©2015 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.