GBJ2006F


GLASS PASSIVATED
BRIDGE RECTIFIERS

REVERSE VOLTAGE - **600**Volts
FORWARD CURRENT - **20** Amperes

FEATURES

- ●Rating 600V PRV
- ● Ideal for printed circuit board
- ●Low forward voltage drop,high current capability
- ●Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- ●The plastic material has UL flammability classification 94V-0

GBJ

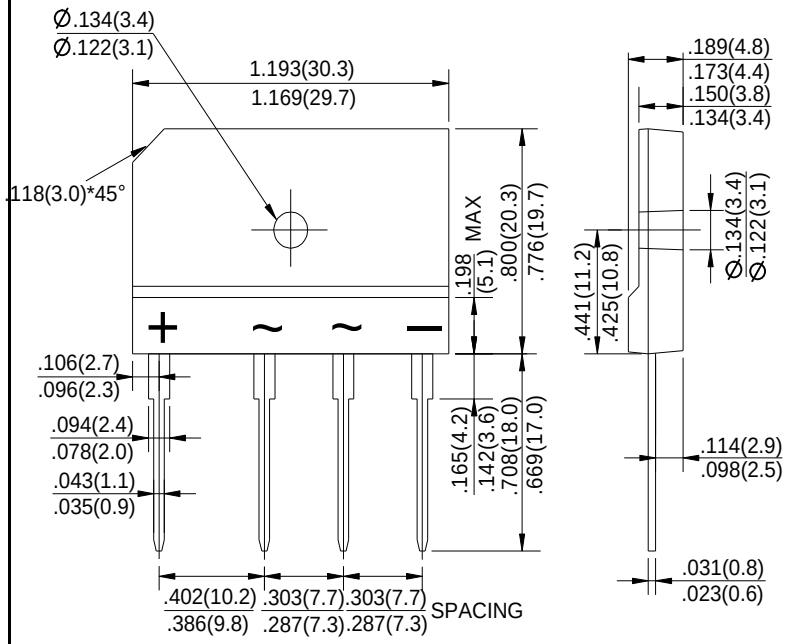

Dimensions in inches and (milimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25℃ ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	GBJ2006F	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	600	V
Maximum RMS Voltage	V_{RMS}	420	V
Maximum DC Blocking Voltage	V_{DC}	600	V
Maximum Average Forward (with heatsink Note 2) Rectified Current @ T_C=100℃ (without heatsink)	$I_{(AV)}$	20.0 3.6	A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I_{FSM}	260	A
Maximum Forward Voltage at 10.0A DC	V_F	0.95	V
Maximum DC Reverse Current @ T_J=25℃ at Rated DC Blocking Voltage @ T_J=125℃	I_R	10.0 500	μA
I^2t Rating for Fusing (t<8.3ms)	I^2t	280	A^2s
Typical Junction Capacitance Per Element (Note1)	C_J	60	pF
Operating Temperature Range	T_J	-55 to +150	℃
Storage Temperature Range	T_{STG}	-55 to +150	℃

NOTES: 1.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2.Device mounted on 300mm*300mm*1.6mm Cu plate heatsink.

3.The typical data above is for reference only(典型值仅供参考).

REV. 2, 18-Aug-2015

RATING AND CHARACTERTIC CURVES
GBJ2006F

FIG.1-FORWARD CURRENT DERATING CURVE

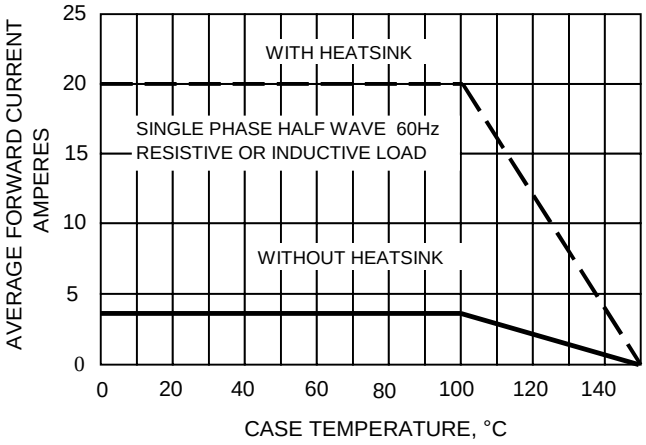


FIG.2-MAXMUN NON-REPETITIVE SURGE CURRENT

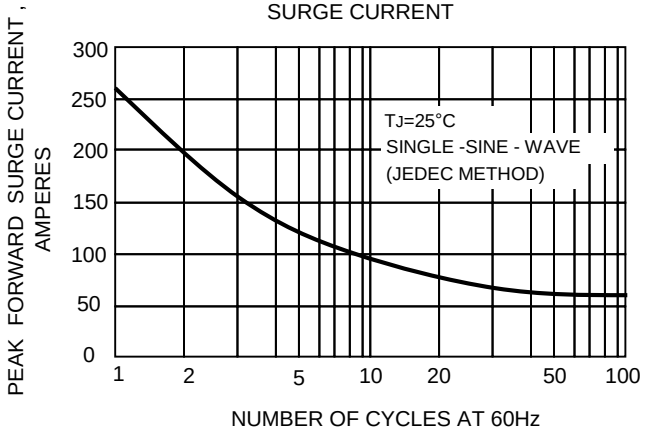


FIG.3-TYPICAL JUNCTION CAPACITANCE

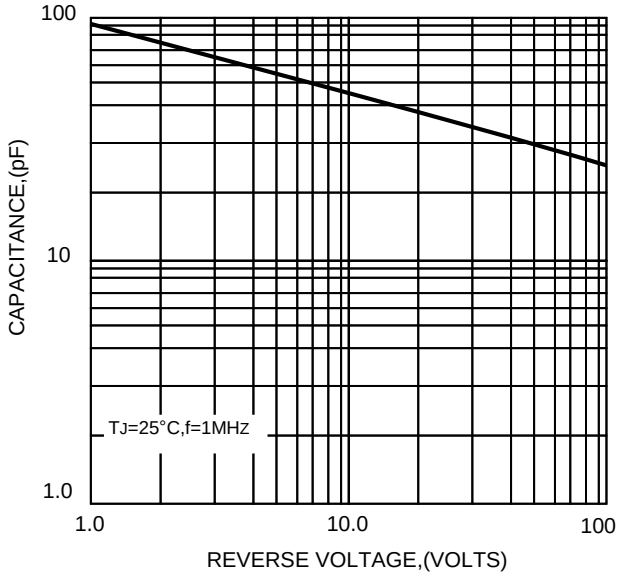


FIG.4-TYPICAL FORWARD CHARACTERISTICS


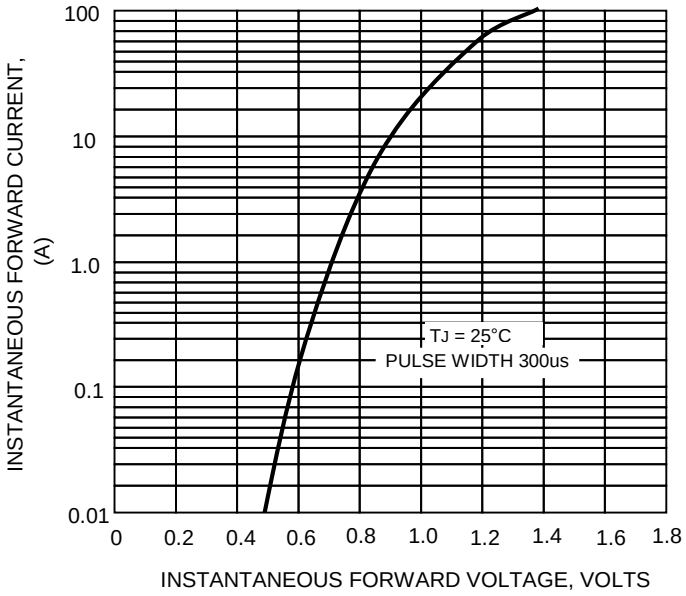


FIG.5-TYPICAL REVERSE CHARACTERISTICS

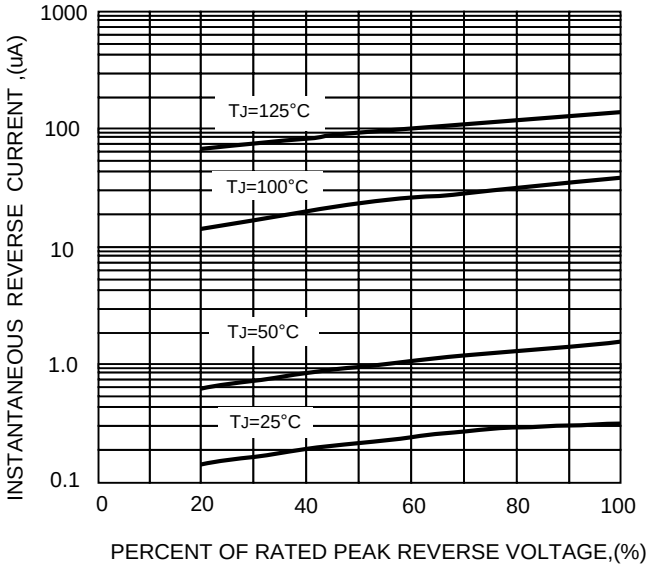

The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!

REV. 2, 18-Aug-2015