
SK30GB123

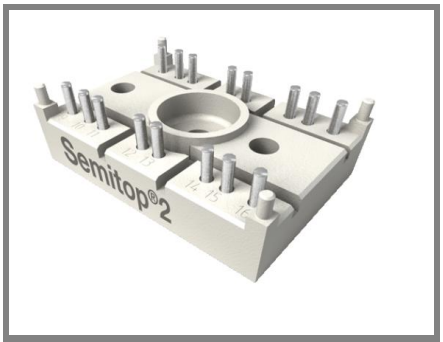

SEMITOP® 2

IGBT Module

SK30GB123

SK30GAL123

SK30GAR123


Preliminary Data

Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- N-channel homogeneous silicon structure (NPT-Non punch-through IGBT)
- High short circuit capability
- Low tail current with low temperature dependence

Typical Applications

- Switching (not for linear use)
- Inverter
- Switched mode power supplies
- UPS

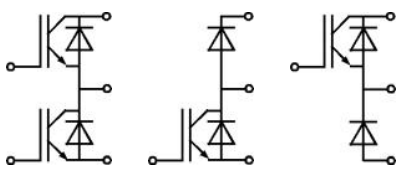


GB GAL GAR

Absolute Maximum Ratings	T_s = 25 °C, unless otherwise specified			
Symbol	**Conditions**		**Values**	**Units**
IGBT				
V_{CES}	T_j = 25 °C		1200	V
I_C	T_j = 125 °C	T_s = 25 °C	33	A
		T_s = 80 °C	22	A
I_{CRM}	I_{CRM}= 2 x I_{Cnom}		50	A
V_{GES}			± 20	V
t_{psc}	V_{CC} = 600 V; $V_{GE} \leq$ 20 V; V_{CES} < 1200 V	T_j = 125 °C	10	µs
Inverse Diode				
I_F	T_j = 150 °C	T_s = 25 °C	37	A
		T_s = 80 °C	25	A
I_{FRM}	I_{FRM}= 2 x I_{Fnom}			A
I_{FSM}	t_p = 10 ms; half sine wave	T_j = 150 °C	350	A
Module				
$I_{t(RMS)}$				A
T_{vj}			-40 ... +150	°C
T_{stg}			-40 ... +125	°C
V_{isol}	AC, 1 min.		2500	V

Characteristics	T_s = 25 °C, unless otherwise specified					
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Units**
IGBT						
$V_{GE(th)}$	V_{GE} = V_{CE}, I_C = 1 mA		4,5	5,5	6,5	V
I_{CES}	V_{GE} = 0 V, V_{CE} = V_{CES}	T_j = 25 °C			0,15	mA
		T_j = 125 °C				mA
I_{GES}	V_{CE} = 0 V, V_{GE} = 30 V	T_j = 25 °C			120	nA
		T_j = 125 °C				nA
V_{CE0}		T_j = 25 °C		1,2		V
		T_j = 125 °C		1,2		V
r_{CE}	V_{GE} = 15 V	T_j = 25°C		52		mΩ
		T_j = 125°C		76		mΩ
$V_{CE(sat)}$	I_{Cnom} = 25 A, V_{GE} = 15 V	T_j = 25°C$_{chiplev.}$	2	2,5	3	V
		T_j = 125°C$_{chiplev.}$		3,1	3,7	V
C_{ies}	V_{CE} = 25, V_{GE} = 0 V	f = 1 MHz		1,65		nF
C_{oes}				0,25		nF
C_{res}				0,11		nF
$t_{d(on)}$	R_{Gon} = 25 Ω	V_{CC} = 600V		40		ns
t_r		I_{Cnom}= 25A		45		ns
E_{on}		T_j = 125 °C		3,5		mJ
$t_{d(off)}$	R_{Goff} = 25 Ω	V_{GE}=±15V		300		ns
t_f				45		ns
E_{off}				2,6		mJ
$R_{th(j-s)}$	per IGBT				1	K/W

 © by SEMIKRON

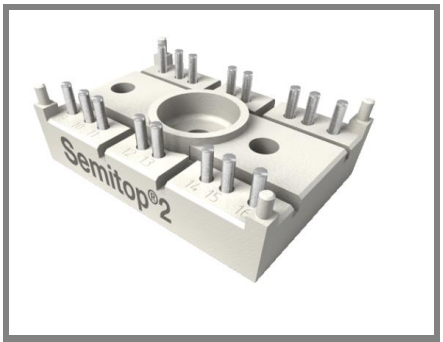

SEMITOP® 2

IGBT Module

SK30GB123

SK30GAL123

SK30GAR123


Preliminary Data

Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- N-channel homogeneous silicon structure (NPT-Non punch-through IGBT)
- High short circuit capability
- Low tail current with low temperature dependence

Typical Applications

- Switching (not for linear use)
- Inverter
- Switched mode power supplies
- UPS

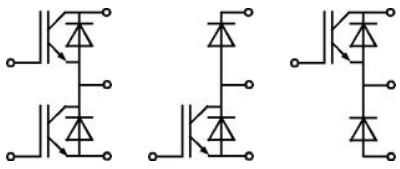

GB GAL GAR

Characteristics

Symbol	Conditions		min.	typ.	max.	Units
Inverse Diode						
$V_F = V_{EC}$	I_{Fnom} = 25 A; V_{GE} = 0 V	T_j = 25 °$C_{chiplev.}$		2	2,5	V
		T_j = 125 °$C_{chiplev.}$		1,8	2,3	V
V_{F0}		T_j = 125 °C		1	1,2	V
r_F		T_j = 125 °C		32	44	mΩ
I_{RRM}	I_{Fnom} = 22 A	T_j = 125 °C		25		A
Q_{rr}	di/dt = -500 A/µs			4,5		µC
E_{rr}	V_{CC}= 600V			1		mJ
$R_{th(j-s)D}$	per diode				1,2	K/W
M_s	to heat sink M1				2	Nm
w				19		g

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

 © by SEMIKRON

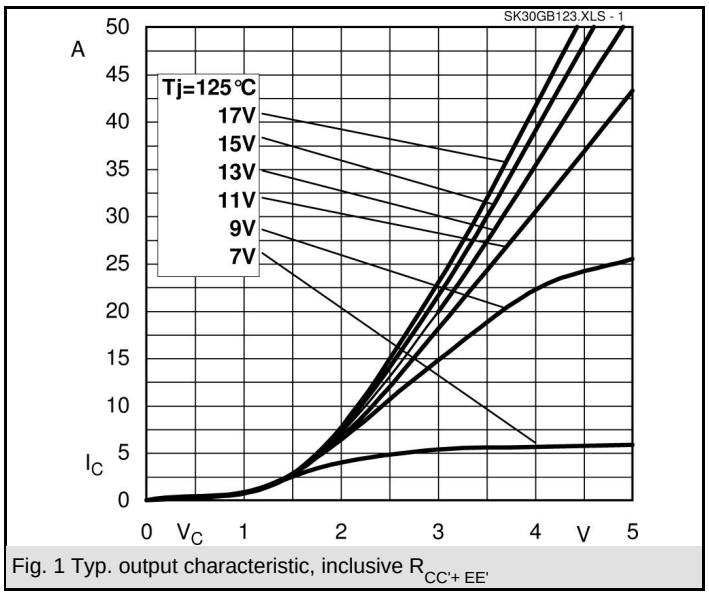


Fig. 1 Typ. output characteristic, inclusive $R_{CC'+ EE'}$

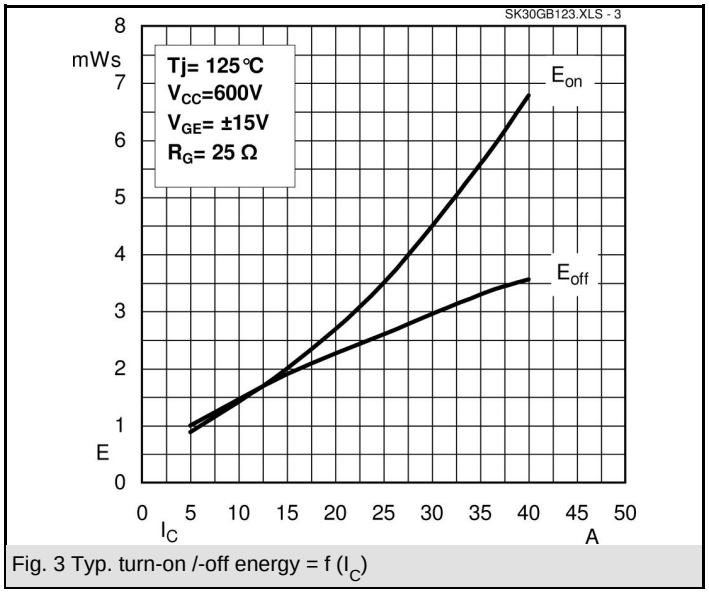


Fig. 3 Typ. turn-on /-off energy = f (I_C)

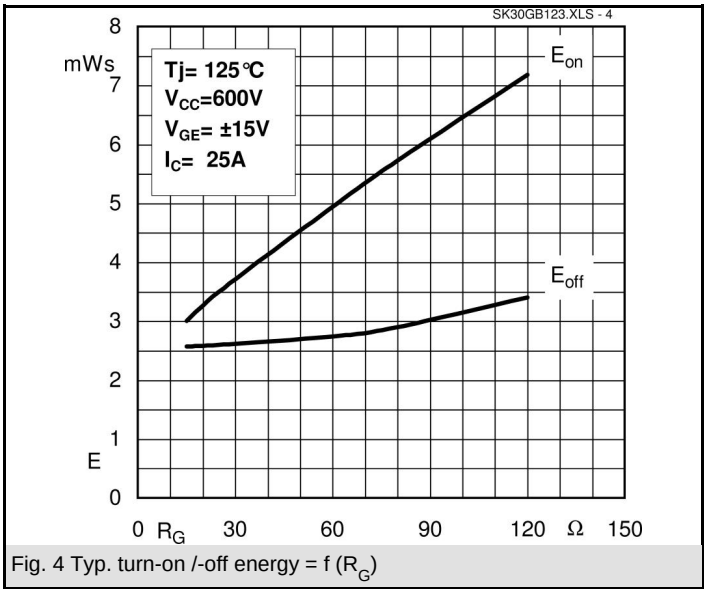


Fig. 4 Typ. turn-on /-off energy = f (R_G)

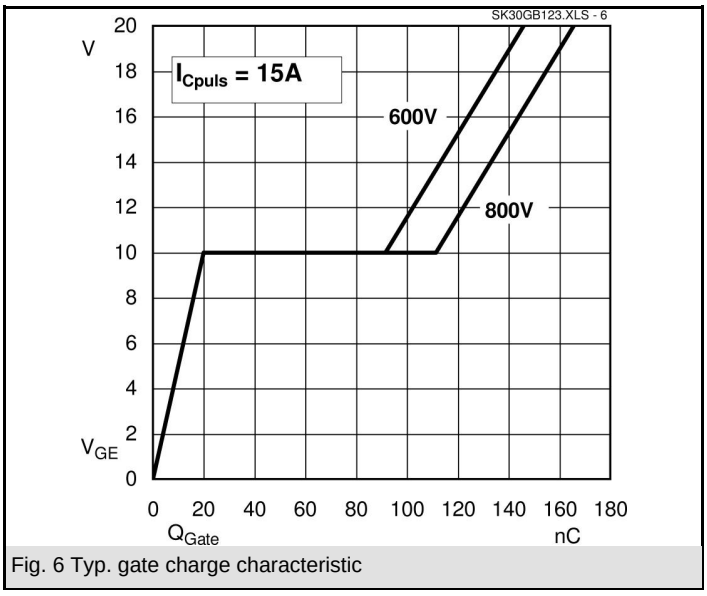


Fig. 6 Typ. gate charge characteristic

 © by SEMIKRON

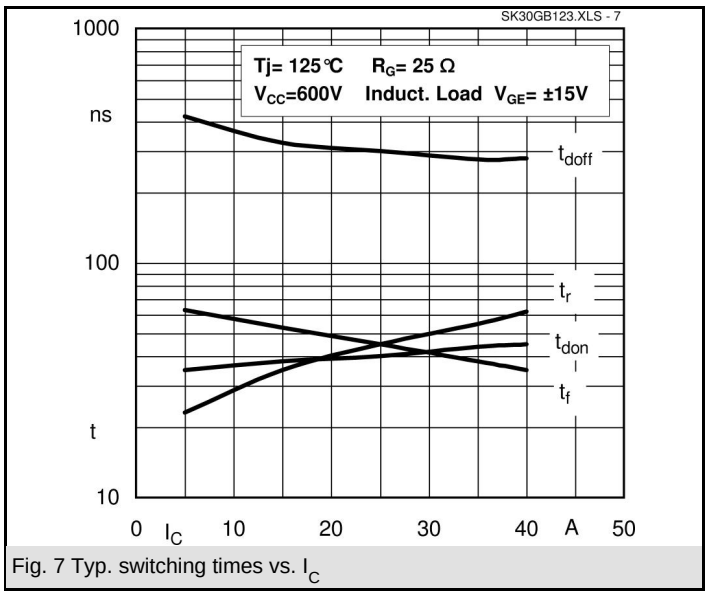


Fig. 7 Typ. switching times vs. I_C

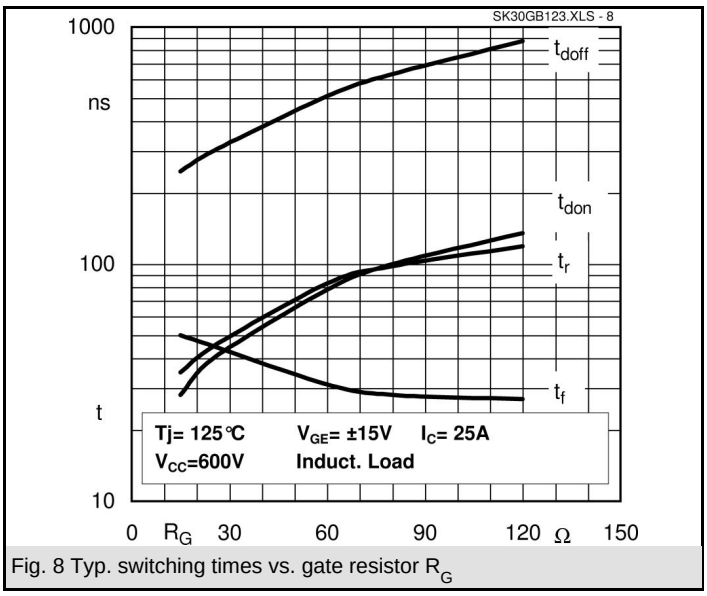


Fig. 8 Typ. switching times vs. gate resistor R_G


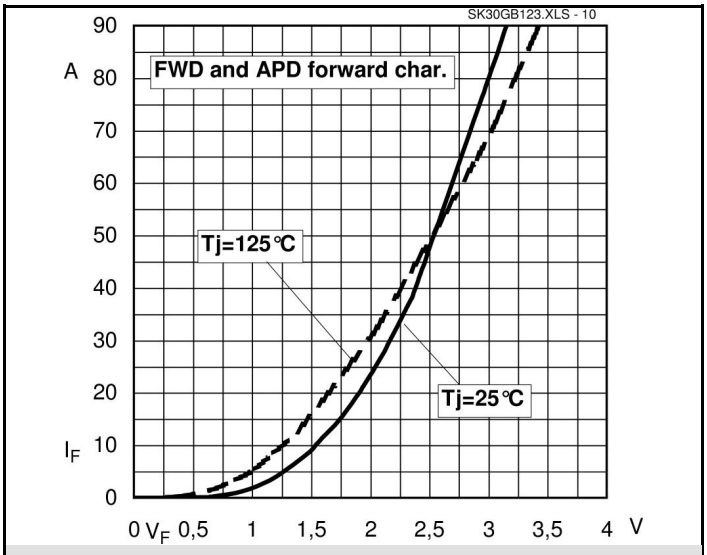



Fig. 10 CAL diode forward characteristic

 © by SEMIKRON


UL recognized file no. E 63 532

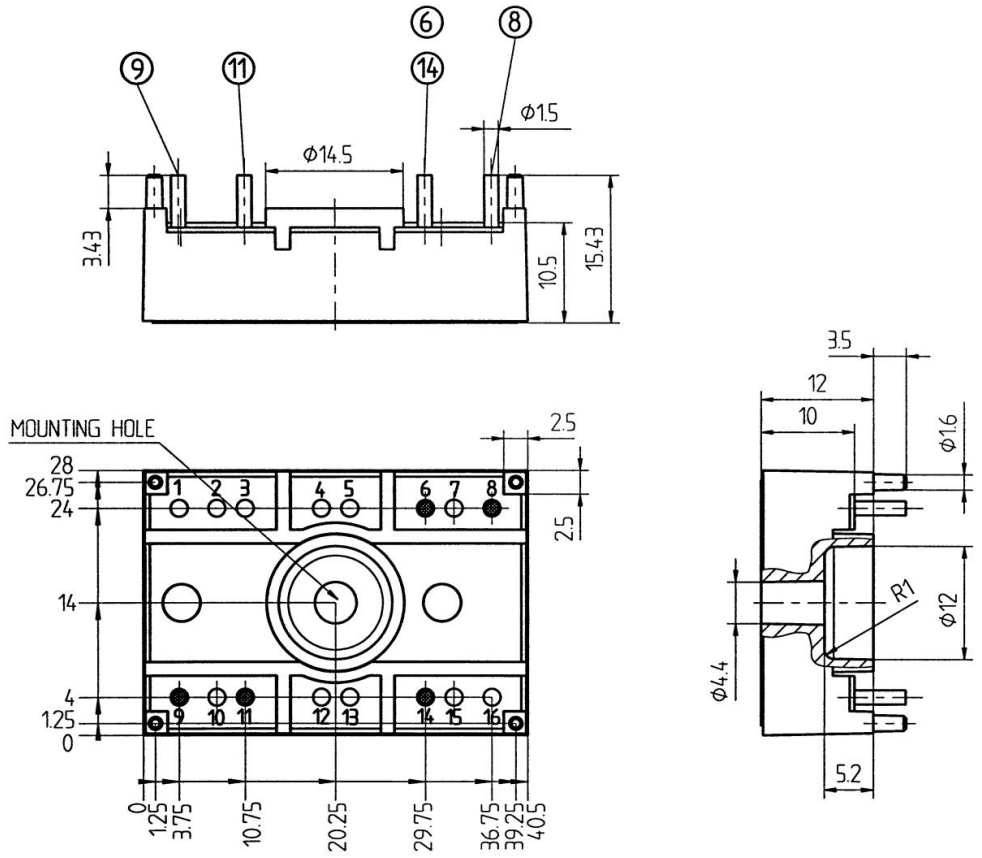


Case T8 (Suggested hole diameter, in the PCB, for solder pins and plastic mounting pins: 2mm)

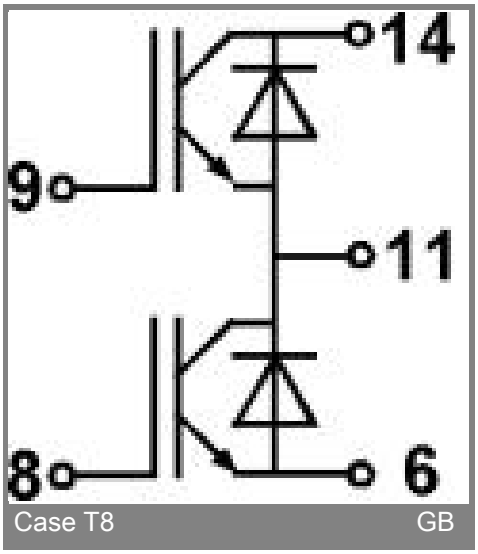

Case T8 GB

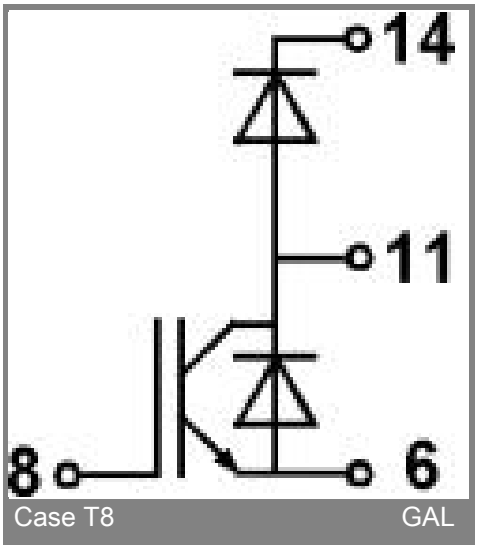

Case T8 GAL

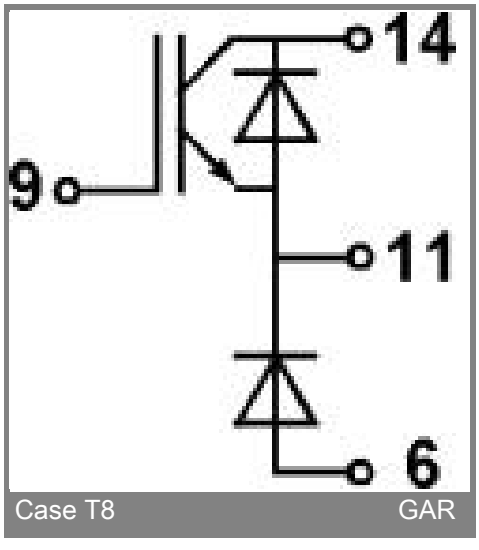

Case T8 GAR

 © by SEMIKRON