EPCOS

SAW Components


Data Sheet X 7253 D



Duroplast package **SIP5D**

Features

- IF filter for digital TV
- Switchable between two bandwidths
- Standard IC package

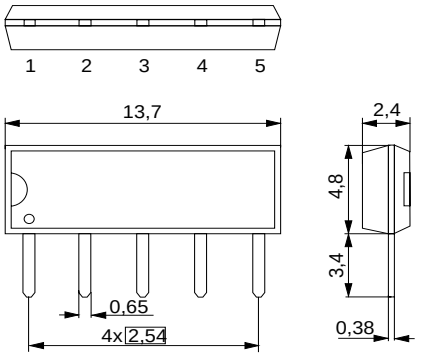


Dimensions in mm, approx. weight 0,5 g

Terminals

- Tinned CuFe alloy

Pin configuration

1	Input
2	Switching input
3	Chip carrier – ground
4	Output
5	Output

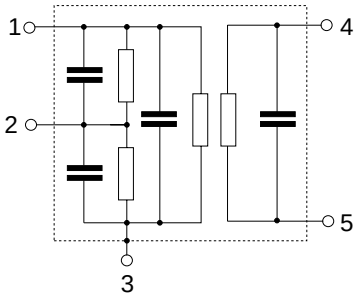

Type	Ordering code	Marking and package according to	Packing according to
X 7253 D	B39360-X7253-N201	C61157-A1-A21	F61074-V8049-Z000

Maximum ratings

Operable temperature range	T_A	–25/+65	˚C	
Storage temperature range	T_{stg}	–40/+85	˚C	
DC voltage	V_{DC}	5	V	between any terminals
AC voltage	V_{pp}	10	V	between any terminals

Characteristics of channel 1 (switching pin 2 connected to ground)

Reference temperature: T_A = 25 °C
Terminating source impedance: Z_S = 50 Ω
Terminating load impedance: Z_L = 2 kΩ || 3 pF


			min.	typ.	max.	
Insertion attenuation		α				
Reference level for the following data	36,00 MHz		19,5	21,0	22,5	dB
Amplitude ripple		$\Delta\alpha$				
	32,45 ... 39,55 MHz		—	1,9	—	dB
Pass bandwidth						
$\alpha_{rel} \leq$ 3 dB		B_{3dB}	—	7,7	—	MHz
$\alpha_{rel} \leq$ 15 dB		B_{15dB}	—	8,3	—	MHz
Relative attenuation		α_{rel}				
Adjacent picture carrier	30,75 MHz		40,0	48,0	—	dB
Adjacent sound carrier	40,25 MHz		18,0	28,0	—	dB
	40,75 MHz		31,0	39,0	—	dB
	41,25 MHz		34,0	41,0	—	dB
	31,80 MHz		11,0	17,0	—	dB
Lower sidelobe	25,00 ... 30,75 MHz		34,0	39,0	—	dB
Upper sidelobe	41,50 ... 45,00 MHz		34,0	40,0	—	dB
Reflected wave signal suppression						
1,3 µs ... 6,0 µs after main pulse (test pulse 250 ns, carrier frequency 36,00 MHz)			40,0	50,0	—	dB
Feedthrough signal suppression						
1,3 µs ... 1,2 µs before main pulse (test pulse 250 ns, carrier frequency 36,00 MHz)			—	50,0	—	dB
Group delay ripple (p-p)		$\Delta\tau$				
	32,20 ... 39,80 MHz		—	60	—	ns
Impedance at 36,00 MHz						
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$			—	1,5 ‖18,3	—	kΩ || pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$			—	2,3 ‖ 4,6	—	kΩ || pF
Temperature coefficient of frequency		TC_f	—	–72	—	ppm/K


Characteristics of channel 2 (switching pin 2 connected to pin 1)

Reference temperature: T_A = 25 °C
Terminating source impedance: Z_S = 50 Ω
Terminating load impedance: Z_L = 2 kΩ || 3 pF


				min.	typ.	max.	
Insertion attenuation			α				
Reference level for the following data		36,00 MHz		19,0	20,5	22,0	dB
Amplitude ripple			$\Delta\alpha$				
	33,10 ...	38,90 MHz		—	2,5	—	dB
Pass bandwidth							
$\alpha_{rel} \leq$ 3 dB			B_{3dB}	—	6,8	—	MHz
$\alpha_{rel} \leq$ 15 dB			B_{15dB}	—	7,3	—	MHz
Relative attenuation			α_{rel}				
Adjacent picture carrier		31,25 MHz		34,0	41,0	—	dB
Adjacent sound carrier		39,75 MHz		17,0	25,0	—	dB
		32,33 MHz		9,0	13,0	—	dB
Lower sidelobe	25,00 ...	31,25 MHz		34,0	37,0	—	dB
Upper sidelobe	41,25 ...	45,00 MHz		30,0	36,0	—	dB
Reflected wave signal suppression							
1,3 µs ... 6,0 µs after main pulse (test pulse 250 ns, carrier frequency 36,00 MHz)				40,0	50,0	—	dB
Feedthrough signal suppression							
1,3 µs ... 1,2 µs before main pulse (test pulse 250 ns, carrier frequency 36,00 MHz)				—	48,0	—	dB
Group delay ripple (p-p)			$\Delta\tau$				
	32,70 ...	39,30 MHz		—	60	—	ns
Impedance at 36,00 MHz							
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$				—	1,5 ‖23,1	—	kΩ || pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$				—	2,3 ‖ 4,6	—	kΩ || pF
Temperature coefficient of frequency			TC_f	—	–72	—	ppm/K

Frequency response of channel 1

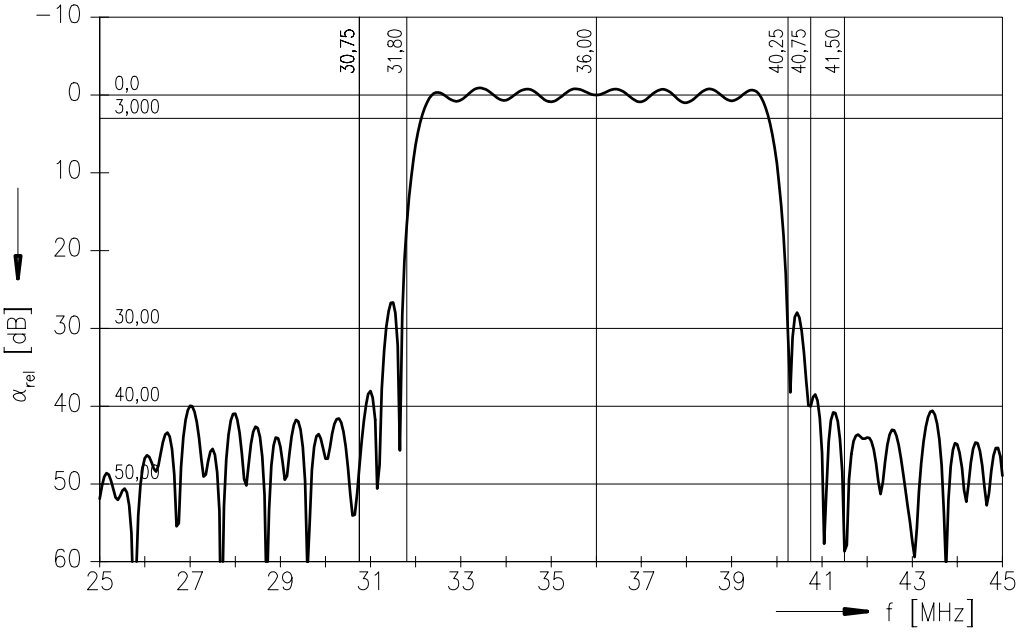


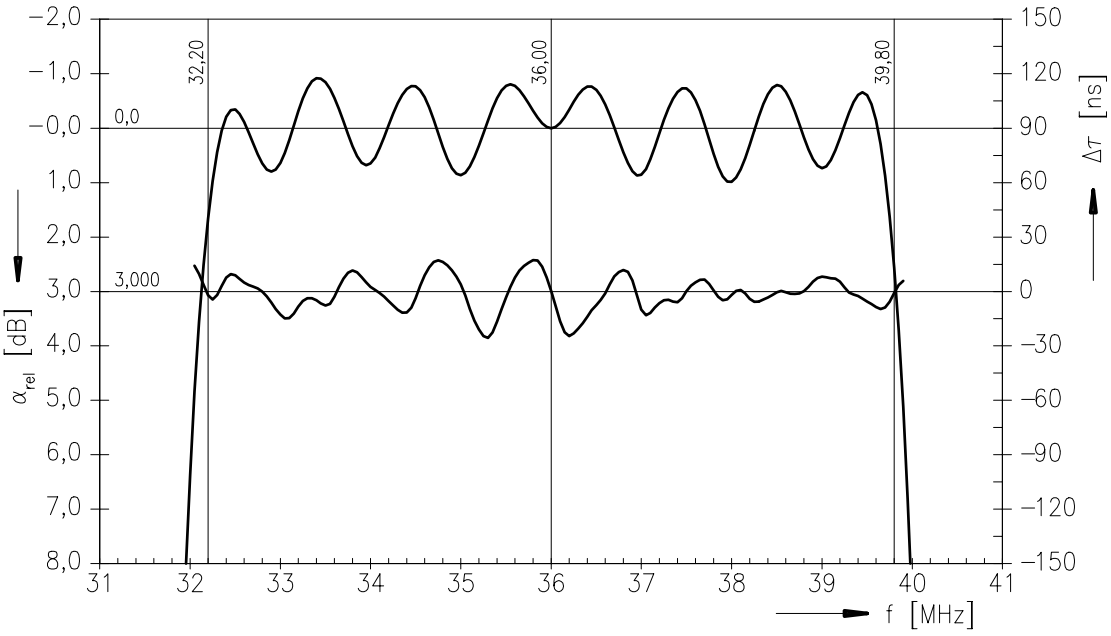


Frequency response of channel 1

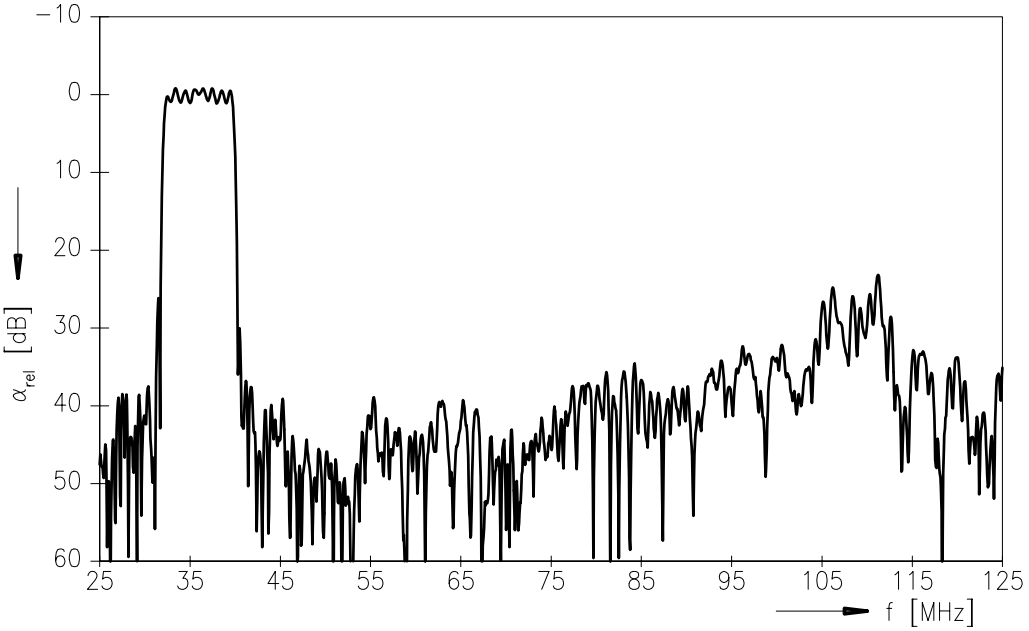


Time domain response channel 1

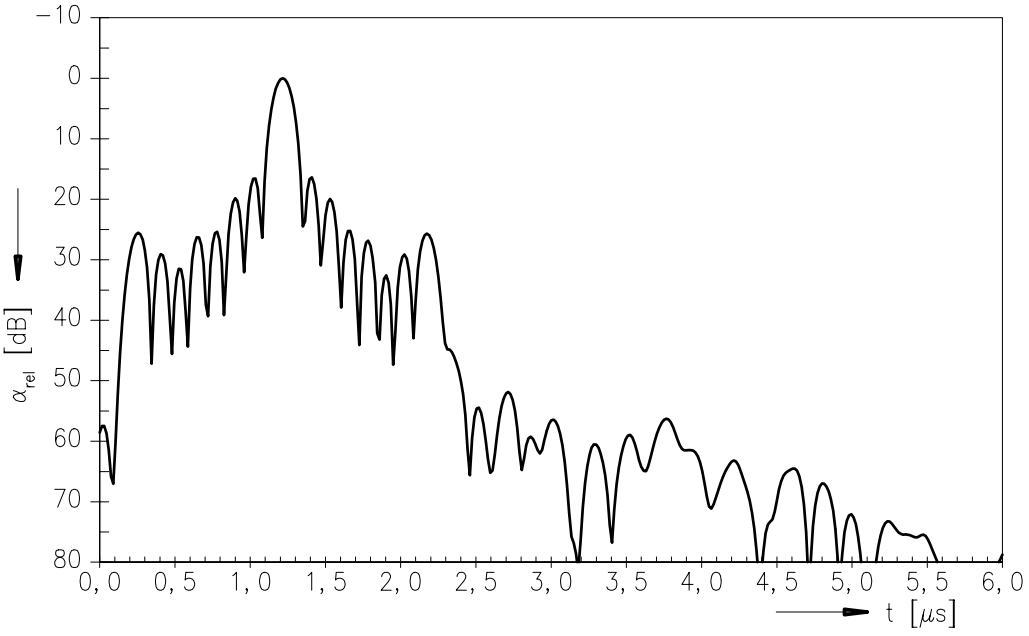


Frequency response of channel 2

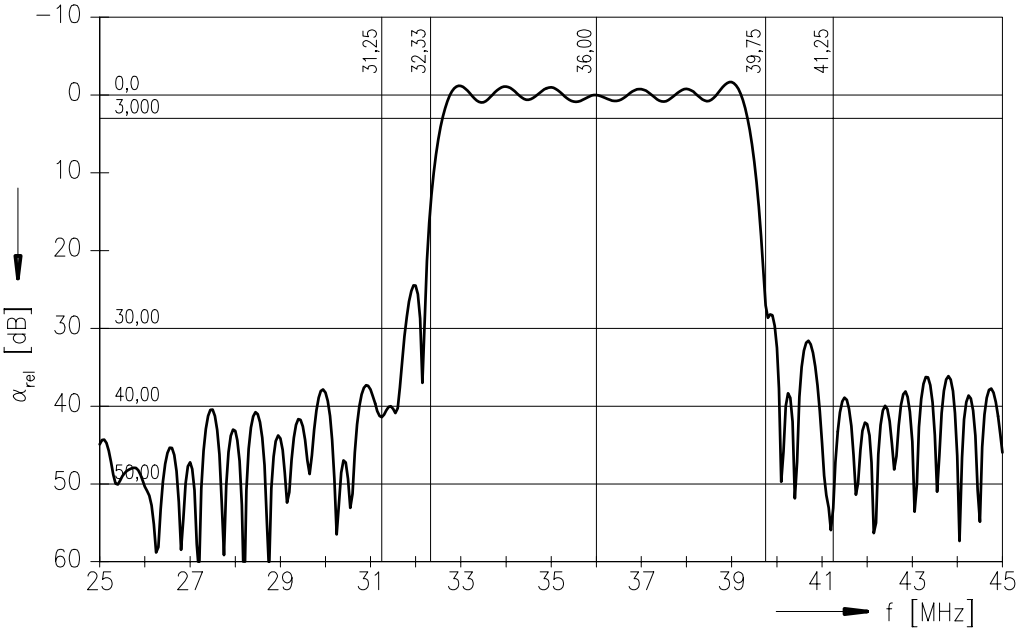


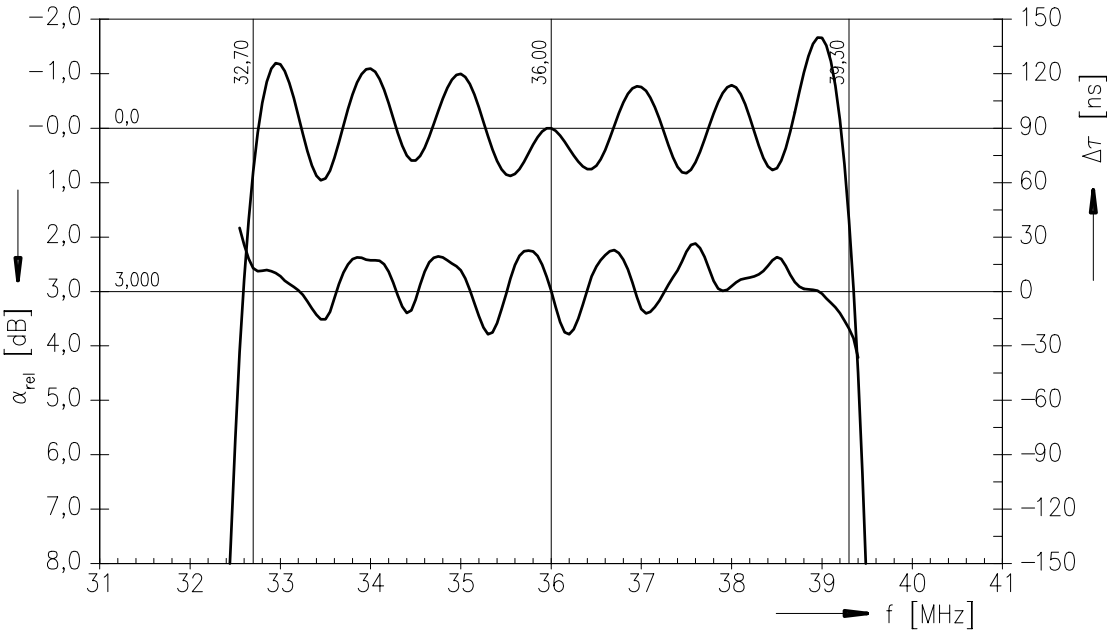

Frequency response of channel 2

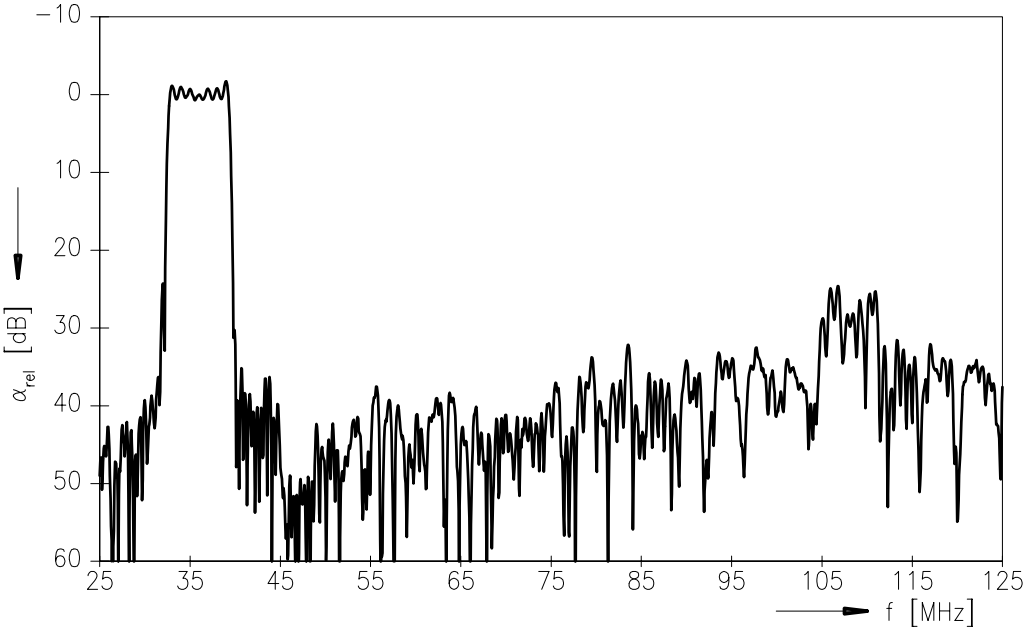

Time domain response channel 2

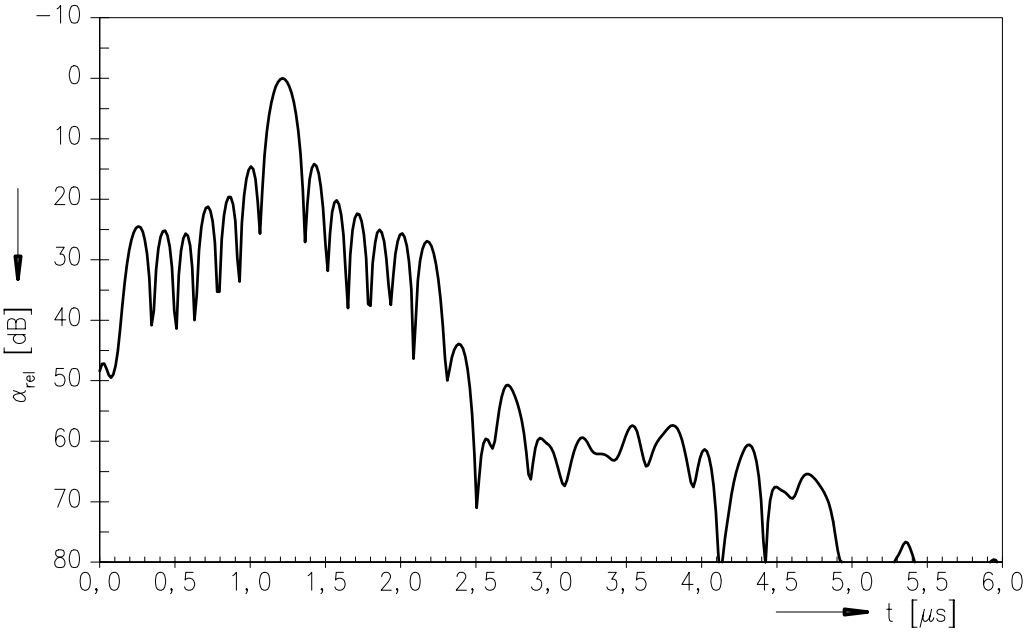

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW CE MM PD
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.