

3S4A_1U Series

3W Single Output - Fixed Input - Isolated & Unregulated
 SIP PACKAGE



DC-DC Converter

3 Watt

- ⊕ **Small Footprint**
- ⊕ **Ultra compact SIP package**
- ⊕ **High power density: 2.0W/cm³**
- ⊕ **Temperature range:**
-40°C ~ +85°C
- ⊕ **Efficiency up to 86%**
- ⊕ **No external component required**
- ⊕ **1KVDC isolation**
- ⊕ **Internal SMD construction**
- ⊕ **Industry standard pinout**
- ⊕ **RoHS compliance**

The 3S4A_U series are miniature, isolated 3W DC/DC converters in a SIP package. They offer the ideal solution in many space critical applications for board level power distribution.

The internal SMD construction makes it possible to offer a product with high performance at low cost. The series offers smaller size, improved efficiency, lower output ripple noise and 1KVDC isolation.



Common specifications

Short circuit protection*:	1 second
Casing temperature rise at full load:	5V output: 46°C MAX Other output: 38°C MAX
Cooling:	Free air convection
Operation temperature range:	-40°C – +85°C
Storage temperature range:	-50°C – +130°C
Lead temperature:	300°C (1.5mm from case for 10 sec.)
Storage humidity range:	< 95%
Internal power dissipation:	800mW
Case material:	Black flame-retardant heat-proof plastic [UL94-V0]
Potting material:	Epoxy [UL94-V0]
MTBF:	>3,500,000 hours
Weight:	2.0g

* Supply voltage must be discontinued at the end of short circuit duration.

Isolation specifications

Item	Test condition	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute	1000			VDC
Isolation resistance	Input-output, isolation voltage 500VDC	1000			MΩ

Model selection:

WCTP_xyyN##O**

W=Watt; **C**= Case; **T**=Type; **P**=Pinning; ******= Voltage Variation (omitted ± 10%); **xx**= Vin; **yy**= Vout; **N**= Numbers of Output; **##**= Isolation (kVDC); **O**= output regulation

Example:

3S7A_0505S1U

3= 3Watt; **S7**= SIP7; **A**= Pinning; **5Vin**; **5Vout**; **S**= Single Output; **1**= 1kVDC; **U**= Unregulated Output

Output specifications

Item	Test condition	Min	Typ	Max	Units
Output voltage accuracy	See tolerance envelope				
Line regulation	For Vin change of ±1%			±1.2	%
Load regulation (10%-100% load)	• 3.3/5/15VDC output • 9VDC output • 12VDC output			9 5 6	% % %
Temperature drift	100% full load			±0.03	%/°C
Ripple&Noise*	20MHz Bandwidth		100		mVp-p
Switching frequency	Full load, nominal input		95		KHz

*Ripple and noise are measured by “parallel cable” method.

Input specifications

Item	Test condition	Min	Typ	Max	Units
Voltage range	• 5V input • 12V input	4.5 11	5 12	5.5 13.3	V V
Reflected ripple current	• 5V input • 12V input		35 40		mA mA
Surge voltage	• 5V input • 12V input	-0.7 -0.7		9 18	VDC VDC
Input filter	Capacitor				
Hot plug	Unavailable				

EMC specifications

EMI	CE	CISPR22/EN55022	CLASS B	(see EMC solution-recommended circuit)
EMI	RE	CISPR22/EN55022	CLASS B	(see EMC solution-recommended circuit)
EMI	ESD	IEC 61000-4-2	Contact	±6KV perf. Criteria B

Note:

- If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- The maximum capacitive load offered were tested at nominal input voltage and full load;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75% with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our Company's corporate standards;
- The performance parameters of the product models listed in this manual are as above, but some parameters of non-standard model products may exceed the requirements mentioned above. Please contact our technicians directly for specific information;
- We can provide product customization service;
- Specifications are subject to change without prior notice.


3S4A_1U Series

3W Single Output - Fixed Input - Isolated & Unregulated
SIP PACKAGE


Part Number	Input Voltage [V]	Output Voltage [VDC]	Current [mA, max]	Efficiency [%, typ]	Capacitor load [μ F]
3S4A_0503S1U	5	3.3	909	80	220
3S4A_0505S1U	5	5	600	77	220
3S4A_0509S1U	5	9	333	80	220
3S4A_0512S1U	5	12	250	83	220
3S4A_0515S1U	5	15	200	82	220
3S4A_1203S1U	12	3.3	909	80	220
3S4A_1205S1U	12	5	600	80	220
3S4A_1209S1U	12	9	333	84	220
3S4A_1212S1U	12	12	250	86	220
3S4A_1215S1U	12	15	200	85	220

Typical characteristics

Temperature derating


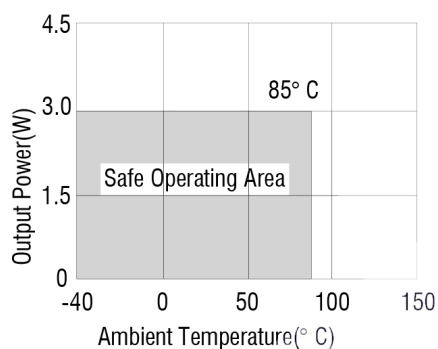


Tolerance envelopes

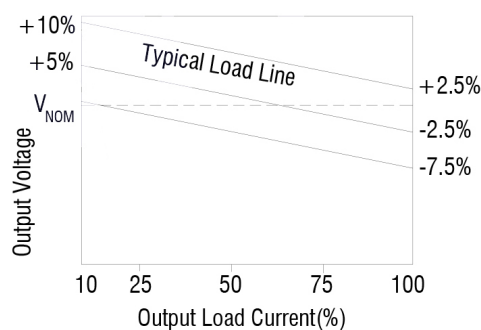

Recommended footprint

Tube outline

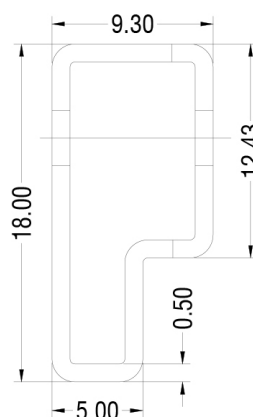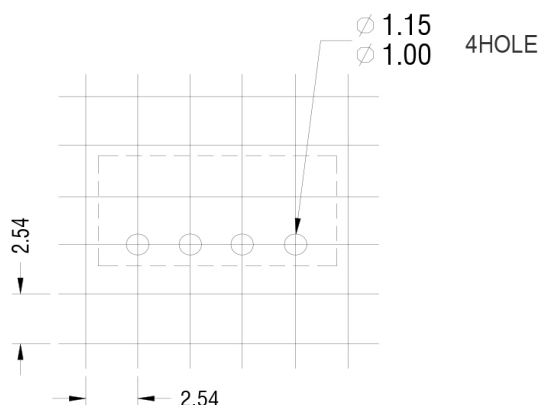


Note:
Unit: mm
General tolerance: ± 0.5 mm
Tube length: 520mm; ± 2 mm
Tube quantity: 35pcs

3S4A_1U Series

3W Single Output - Fixed Input - Isolated & Unregulated
SIP PACKAGE

Mechanical Dimensions

Pin connections

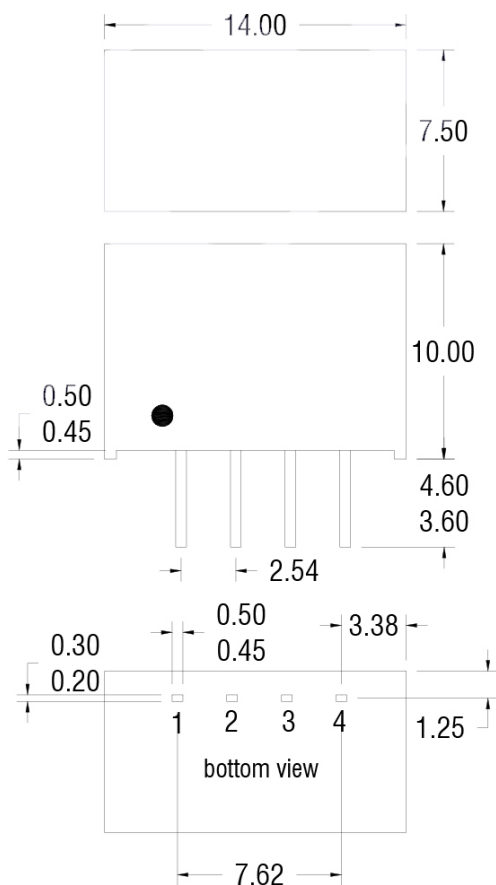

Pin	Function
1	-Vin
2	+Vin
3	-Vout
4	+Vout

Note:

Unit: mm

All pins on a 2.54mm pitch

Pin diameter: ± 0.25 mm

Case tolerances: ± 0.25 mm