

T1 / CEPT Pulse Transformer

Turns Ratio ($\pm 5\%$)

1:1.36

PARAMETER	MIN.	MAX.	UNITS
Open Circuit Inductance Oscillation Voltage = 20mV Oscillation Frequency = 100.0 KHz	1.2		mHy
Leakage Inductance Oscillation Level = 20mV Oscillation Frequency = 100.0 KHz		0.80	μ Hy
Interwinding Capacitance (C_{www}) Oscillation Frequency = 100.0 KHz		35	pF
Primary DC Resistance		0.7	ohms
Secondary DC Resistance		0.7	ohms
Isolation (HI-POT)	1.5 Kv		VRMS

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Temperature Characteristics:

-40° C 700 μ H min.
(40% drop in inductance)

+85° C 1.4 mH min.
(15% growth in inductance)


Typical part: 1.7 mH @ +25° C
2.0 mH @ +85° C
1.0 mH @ -40° C

Parts shipped in anti-static tubes. 44 pieces per tube


*Tape & Reel
Available*

PHYSICAL DIMENSIONS

All dimensions in inches (mm):

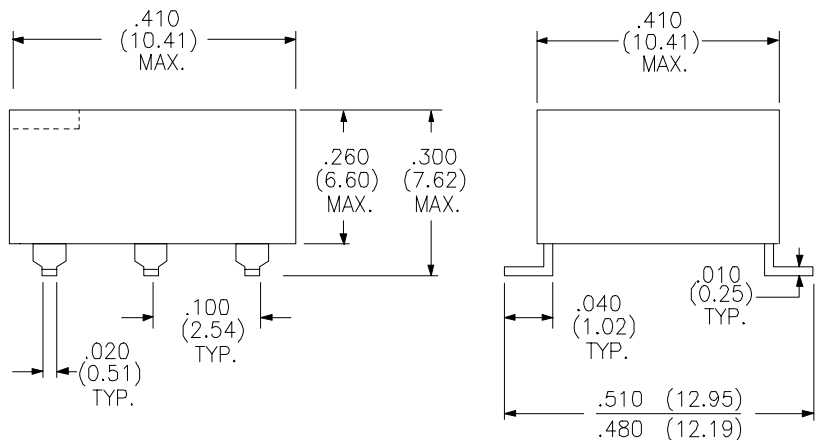

SCHEMATIC DIAGRAM:



Primary Pins 5-6

RHOMBUS INDUSTRIES INC.
FSCM NO. 16714

RHOMBUS P/N: T-10313

CUST P/N:

NAME:

DATE: 4/15/95

SHEET: 1 OF 1



**Rhombus
Industries Inc.**
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649

Phone: (714) 898-0960

FAX: (714) 896-0971

www.rhombus-ind.com