
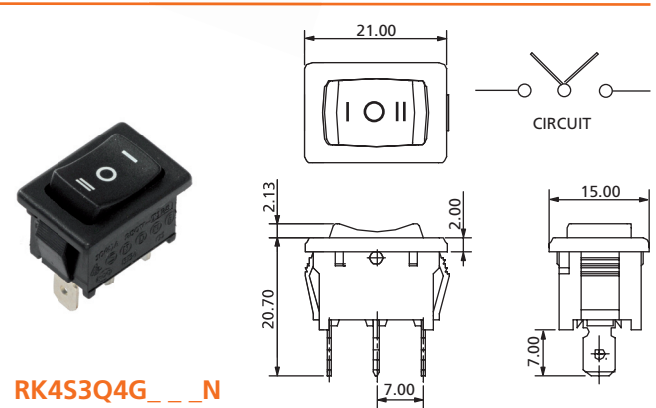
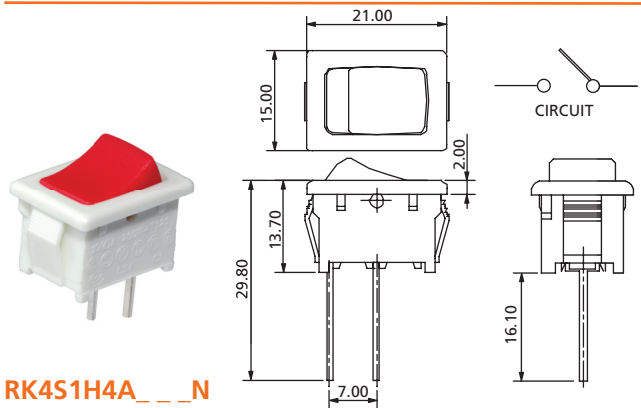
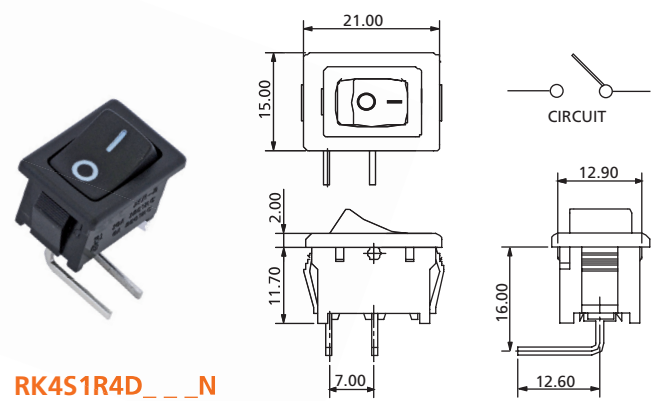


Rocker Switches

21 x 15 mm SP Rocker Switches

RK4 Series

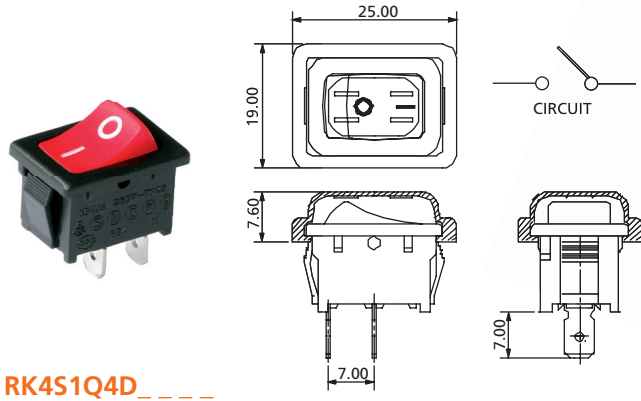

TERMINAL	ACTUATOR MARKING	PANEL SIZE												
Q 4.8mm TAB, 0.8mm Thick D1 Solder Tag Type 1 D2 Solder Tag Type 2 D3 Solder Tag Type 3	A B C D E F G	PANEL CUT-OUT Snap-in mounting <table border="1"> <thead> <tr> <th>X (Panel thickness)</th><th>Dimension Y</th><th>Dimension Z</th></tr> </thead> <tbody> <tr> <td>0.75 to 1.25 mm</td><td>19.20 +0.1/-0 mm</td><td>12.90 +0.15/-0 mm</td></tr> <tr> <td>1.25 to 2 mm</td><td>19.40 +0.1/-0 mm</td><td>12.90 +0.15/-0 mm</td></tr> <tr> <td>2 to 3 mm</td><td>19.80 +0.1/-0 mm</td><td>12.90 +0.15/-0 mm</td></tr> </tbody> </table>	X (Panel thickness)	Dimension Y	Dimension Z	0.75 to 1.25 mm	19.20 +0.1/-0 mm	12.90 +0.15/-0 mm	1.25 to 2 mm	19.40 +0.1/-0 mm	12.90 +0.15/-0 mm	2 to 3 mm	19.80 +0.1/-0 mm	12.90 +0.15/-0 mm
X (Panel thickness)	Dimension Y	Dimension Z												
0.75 to 1.25 mm	19.20 +0.1/-0 mm	12.90 +0.15/-0 mm												
1.25 to 2 mm	19.40 +0.1/-0 mm	12.90 +0.15/-0 mm												
2 to 3 mm	19.80 +0.1/-0 mm	12.90 +0.15/-0 mm												

How to order:

RK4

- | | |
|---|--|
| <p>1 POLES:
S Single Pole</p> <p>2 SWITCHING:
1 ON - OFF
2 ON - ON
3 ON - OFF - ON
4 MOM - OFF</p> <p>3 TERMINAL (See above drawings):
Q 4.8mm TAB, 0.8mm THICK
D1 Solder Tag Type 1
D2 Solder Tag Type 2
D3 Solder Tag Type 3
R Thru Hole Right Angle
L Thru Hole Left Angle
H Thru Hole Straight</p> <p>4 ACTUATOR:
4 Curve</p> | <p>5 ACTUATOR MARKING:
A See above drawings
B See above drawings
C See above drawings
D See above drawings
E See above drawings
F See above drawings
G See above drawings</p> <p>6 BASE COLOR:
A Black
H Grey
B White</p> <p>7 ACTUATOR COLOR:
A Black
H Grey
B White
C Red</p> <p>8 WATERPROOF COVER:
N None Cover (Standard)
W With Waterproof Cover</p> |
|---|--|

General Specifications:

FEATURES

- » Single pole rocker switch up to 20A 125VAC
- » Non illuminated

MATERIALS

- » Contact Arm: Silver cadmium alloy
- » Terminals: Silver plated copper
- » Spring: Piano wire

MECHANICAL

- » Temperature Range: -20°C to +125°C

ELECTRICAL

- » Electrical Life: 10,000 cycles
- » Rating: 20A125VAC, 12A250VAC
10A125VAC, 6A250VAC
6A125VAC, 3A250VAC
6A250VAC
10(4)A250VAC~T125
- » Initial Contact Resistance: 20mΩ max.
- » Insulation Resistance: 100MΩ min. at 500VDC