

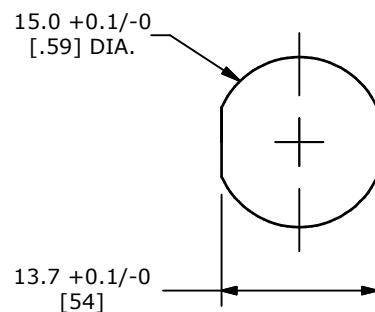
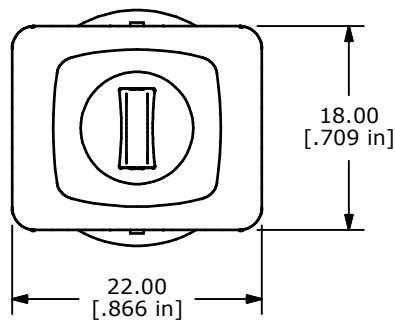

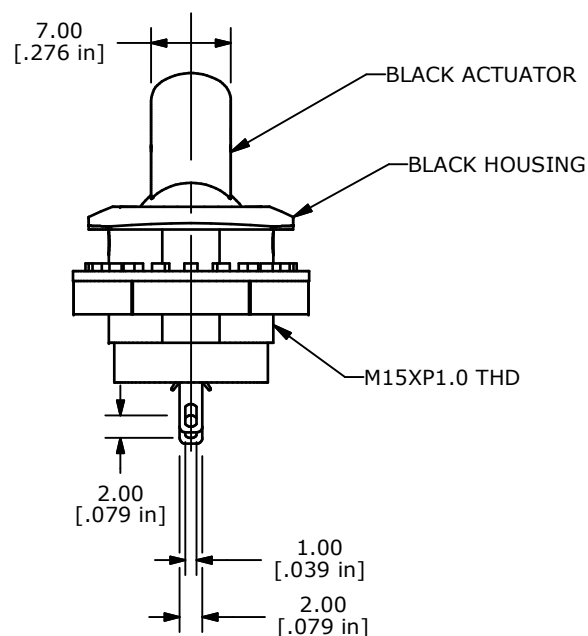


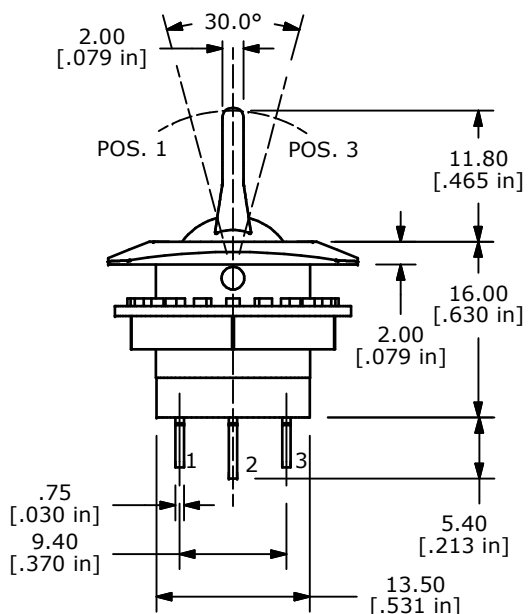

RECOMMENDED PANEL MOUNTING
6MM PANEL THICKNESS MAX.



CIRCUIT: 3P. SPDT
CONTACT CONFIGURATION
(ON) MOMENTARY

▲

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	(ON)
2-3	N/A	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 6A @125V, 3A @250VAC
5. CONTACT RESISTANCE: 50m ohm Max. (INITIAL)
6. INSULATION RESISTANCE: DC 500V 100M ohm Min.
7. DIELECTRIC STRENGTH: AC 1500V 1 minute.
8. ▲ DENOTES CRITICAL PARAMETER.
9. 2002/95/EC (RoHS) COMPLIANT.



E-SWITCH®



TITLE RR3402E

A	19415	RELEASE FOR PRODUCTION	11/11/10	BMA
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	1.5:1	DATE	11/10/2010	DR	BMA	DWG	F030027	REV	A
-------	-------	------	------------	----	-----	-----	---------	-----	---