


SHEET 1 OF 1

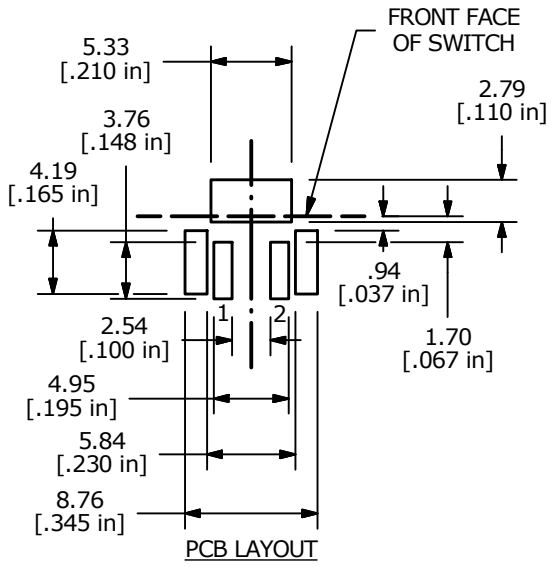


PCB LAYOUT





▲ SPST MOMENTARY CIRCUIT

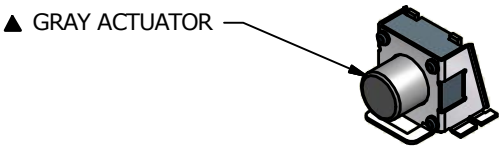

▲ GRAY ACTUATOR

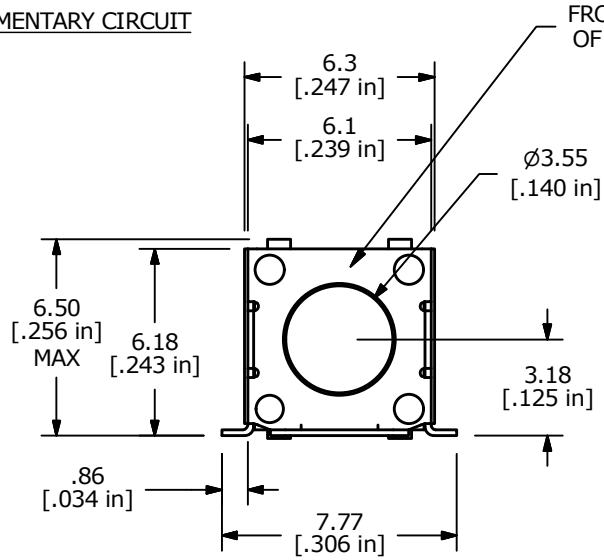

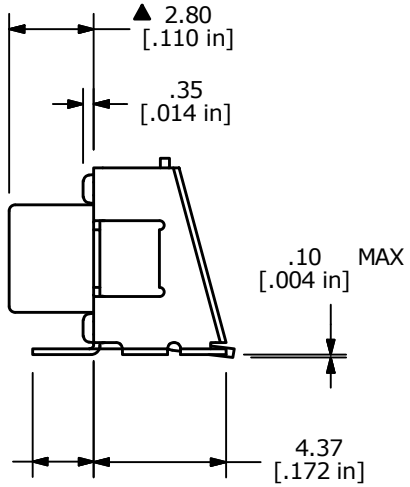

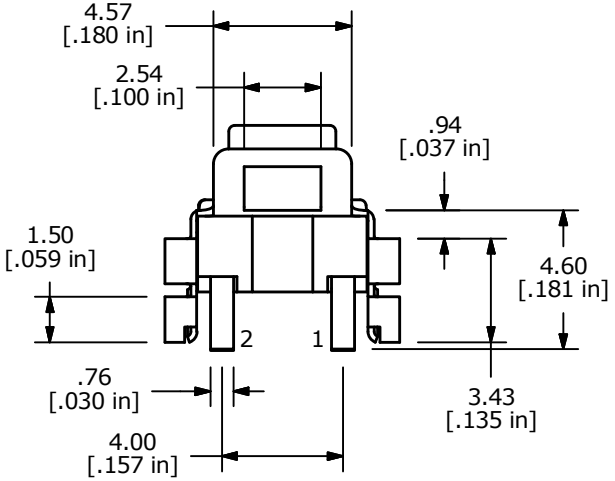

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. CONTACT RATING: 50mA @ 12VDC
4. CONTACT RESISTANCE: 100mΩ MAX.
5. INSULATION RESISTANCE: 100MΩ MIN @ 500VDC.
▲6. OPERATING FORCE: 185 ± 50gf
7. TRAVEL: 0.15 mm
8. OPERATING TEMPERATURE: -25°C TO + 70°C
9. OPEREATING LIFE: 200,000 CYCLES
▲10. CONTACTS: SILVER
11. ▲ DENOTES CRITICAL PARAMETERS
12. 2002/95/EC (ROHS) COMPLIANT
13. PARTS TO BE PACKAGED IN TAPE AND REEL

REV	PCR NO	DESCRIPTION	DATE	BY
B	21965	UPDATE TO GRAY ACTUATOR	8/25/2015	MW
A	21887	INITIAL RELEASE	6/15/15	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE TL3360BF185Q

SCALE	DATE	DR	DWG	REV
4:1	6/15/2015	rc	N330001	B