
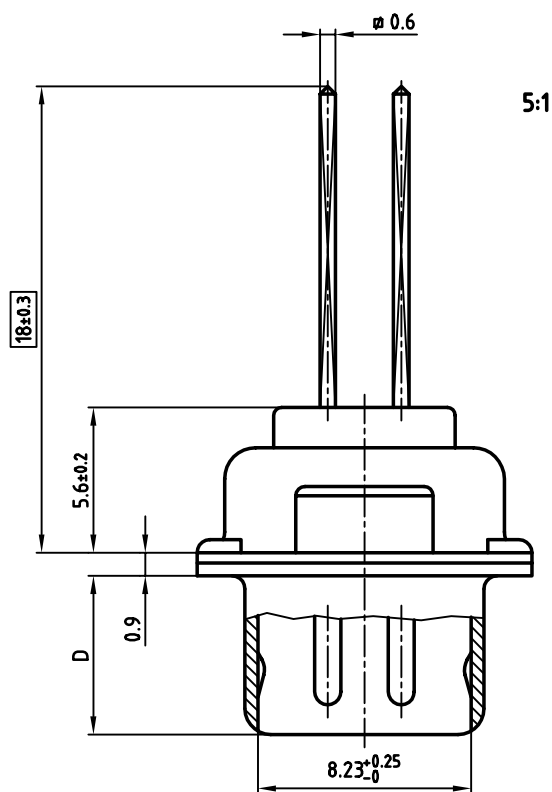

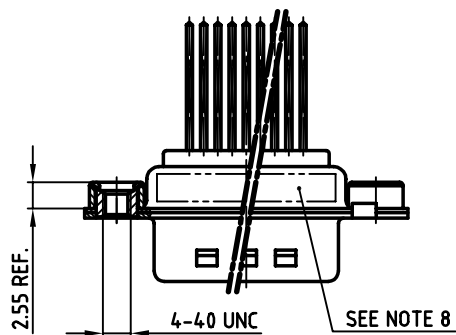


POS.	A -0.76	B $+0.25$	C	D -0.3	PART-NO.
9	31.19	16.79	25.00 $+0.12$ -0.13	6.12	163A11469X
15	39.52	25.12	33.30 $+0.15$ -0.1	6.12	163A11479X
25	53.42	38.84	47.04 ± 0.13	5.99	163A11489X
37	69.70	55.30	63.50 ± 0.13	5.99	163A11499X

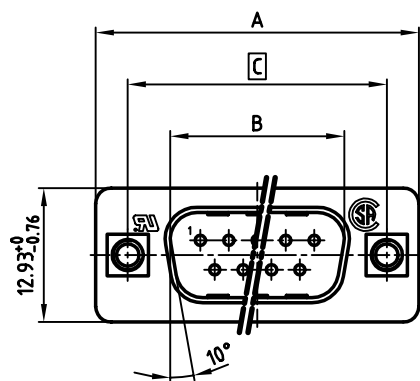

NOTES:

- METALSHELLS: STEEL; min. 320μ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: min. 8μ" HARD GOLD OVER min. 50μ" NICKEL
- THREADED INSERT: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
- COLLAR: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
- P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K11IUA
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: **PART-NO. CONEC Y/WW**
- = CRITICAL DIMENSION

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance			dim. in mm	
2002	date		name	
drawn	15.11.	Parei		
appd.	18.11.	Kühle		
norm	DIN 41652			
d-old				
CONEC				

scale:	2:1 (5:1)
material:	SEE NOTES
title:	
D-SUB MALE 9-37pos. WIRE WRAP with threaded insert	
dwg no:	AutoCAD 2000
16K1A796	
part no:	SEE TABLE
DIN-A	3
sh:	1/1