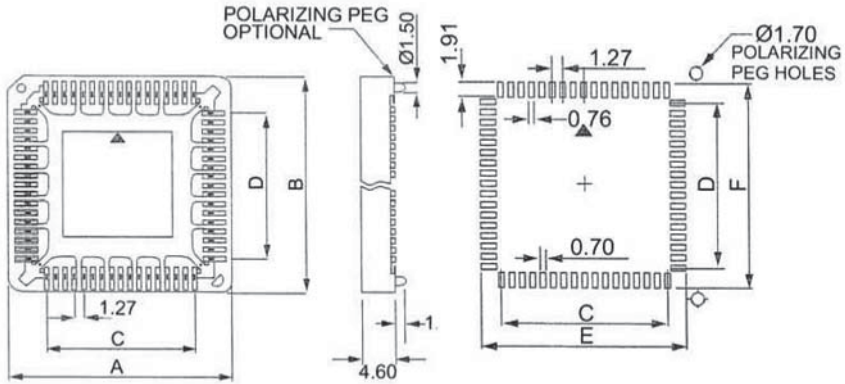


| No. of Contacts | Quantity in tube | Dimension A | B | C | D | E | F |
|---|---|---|---|---|---|---|---|
| 20 | 39 | 15,34 | 15,34 | 5,08 | 5,08 | 10,03 | 10,03 |
| 28 | 33 | 17,85 | 17,85 | 7,62 | 7,62 | 12,57 | 12,57 |
| 32 | 29 | 17,85 | 20,42 | 7,62 | 10,16 | 12,57 | 15,11 |
| 44 | 26 | 23,07 | 23,07 | 12,70 | 12,70 | 17,65 | 17,65 |
| 52 | 23 | 25,50 | 25,50 | 15,24 | 15,24 | 20,19 | 20,19 |
| 68 | 19 | 31,00 | 31,00 | 20,32 | 20,32 | 25,27 | 25,27 |
| 84 | 16 | 36,10 | 36,10 | 25,40 | 25,40 | 30,35 | 30,35 |



Notes:

Insulator
PPS, UL 94V-0

Contacts
Phosphor Bronze
Matte Tin Plated 150U" over Nickel

Current Rating
1A

Insulating Resistance
10000M ohm Min.

Withstanding Voltage
1000V AC

Contact Resistance
15m ohm Max.

Operating Temperature
-40 Degree to +105 Degree

**A-CCSxx-x-xxx-R**
$\llcorner_1$ $\llcorner_2$ $\llcorner_3$

1. No. of Contacts
   20/28/32/44/52/68/84
2. Finish
   z - Tin
   G - Gold
3. Version
   SM : without polarizing peg, tube packing

Unit: MM

RoHS Compliant

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Scale | 1:1 | | | | | | | Name |
| TOLERANCE | | | | | | Drawn | 11.07.11 | Chappell |
| X.X | ±0.40 | | | | | Approved | | |
| X.XX | ±0.25 | | | | | | | |
| X.XXX | ±0.15 | | | | | | | |
| Angle | ±3° | | | | | | | |
| | | | Modification | Date | Name | | | |

ASSMANN WSW components

Item No.
**ACCSxx-x-xxx-R**

Title
Chip Carrier sockets, SMT

Drawing No.

**rev00**

Replace

Sheet