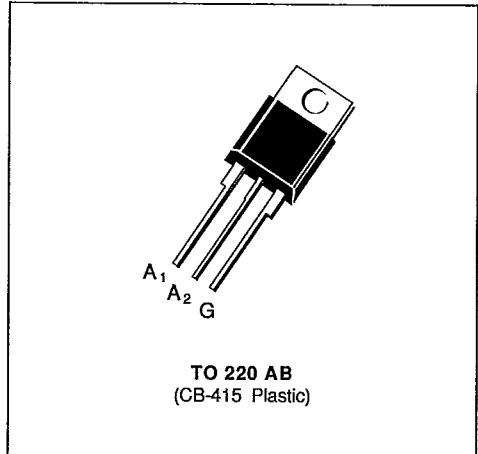


S G S-THOMSON**SNUBBERLESS TRIACS**

- $I_{TRMS} = 8 \text{ A}$ at $T_c = 90^\circ\text{C}$.
- $V_{DRM} : 200 \text{ V}$ to 800 V .
- $I_{GT} = 50 \text{ mA}$ (QI-II-III).
- GLASS PASSIVATED CHIP.
- HIGH SURGE CURRENT : $I_{TSM} = 80 \text{ A}$.
- HIGH COMMUTATION CAPABILITY : $(di/dt)_c > 7 \text{ A/ms}$ without snubber.
- INSULATING VOLTAGE : 2500 VRMS .

**DESCRIPTION**

New range suited for applications such as phase control and static switching on inductive or resistive load.

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter	Value	Unit
I_{TRMS}	RMS on-state current (360° conduction angle)	8	A
I_{TSM}	Non repetitive surge peak on-state current (T_j initial = 25 °C)	$t = 8.3 \text{ ms}$	85
		$t = 10 \text{ ms}$	80
I^2t	I^2t value	32	A^2s
di/dt	Critical rate of rise of on-state current (1)	Repetitive $F = 50 \text{ Hz}$	20
		Non Repetitive	$\text{A}/\mu\text{s}$
T_{Jstg}	Storage and operating junction temperature range	- 40, + 150 - 40, + 125	°C

Symbol	Parameter	BTA 08-					Unit
		200 BW	400 BW	600 BW	700 BW	800 BW	
V_{DRM}	Repetitive peak off-state voltage (2)	± 200	± 400	± 600	± 700	± 800	V

(1) Gate supply : $I_G = 500 \text{ mA}$ - $di_G/dt = 1 \text{ A}/\mu\text{s}$.(2) $T_j = 125^\circ\text{C}$.

BTA 08 BW

S G S-THOMSON

30E D ■ 7929237 0031505 5 ■

T-25-15

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
R _{th} (j-a)	Junction to ambient	60	°C/W
R _{th} (j-c) DC	Junction to case for DC	4.3	°C/W
R _{th} (j-c) AC	Junction to case for 360 ° conduction angle (F = 50 Hz)	3.2	°C/W

GATE CHARACTERISTICS (maximum values)

P_{GM} = 40 W (t = 10 µs) P_{G(AV)} = 1 W I_{GM} = 4 A (t = 10 µs) V_{GM} = 16 V (t = 10 µs).

ELECTRICAL CHARACTERISTICS

Symbol	Test Conditions		Quadrants	Min.	Typ.	Max.	Unit	
I _{GT}	T _j = 25 °C	V _D = 12 V	R _L = 33 Ω	I-II-III	2	50	mA	
	Pulse duration > 20 µs					1.5	V	
V _{GT}	T _j = 25 °C	V _D = 12 V	R _L = 33 Ω	I-II-III				
	Pulse duration > 20 µs			0.2			V	
V _{GD}	T _j = 125 °C	V _D = V _{DRM}	R _L = 3.3 kΩ	I-II-III				
	Pulse duration > 20 µs					50	mA	
I _H *	T _j = 25 °C	I _T = 100 mA						
	Gate open		R _L = 140 Ω					
I _L	T _j = 25 °C	V _D = 12 V	I _G = 500 mA	I-III	50			
	Pulse duration > 20 µs			II	100		mA	
V _{TM} *	T _j = 25 °C	I _{TM} = 11 A	t _p = 10 ms			1.75	V	
I _{DRM} *	T _j = 25 °C	V _{DRM} rated	Gate open			0.01		
	T _j = 125 °C					2	mA	
dV/dt *	T _j = 125 °C	Gate open			500	750	V/µs	
	Linear slope up to 0.67 V _{DRM}							
(dI/dt) _c *	T _j = 125 °C	V _{DRM} rated			7	14	A/ms	
	Without snubber							
t _{gt}	T _j = 25 °C	dI/dt = 3.5 A/µs	I _G = 500 mA	I-II-III	2		µs	
	I _T = 11 A	V _D = V _{DRM}						

* For either polarity of electrode A₂ voltage with reference to electrode A₁.

30E D ■ 7929237 0031506 7 ■

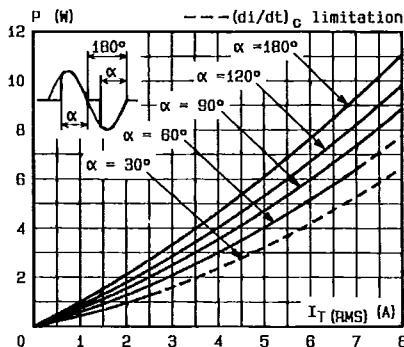


Fig.1 - Maximum mean power dissipation versus RMS on-state current ($F = 60$ Hz).

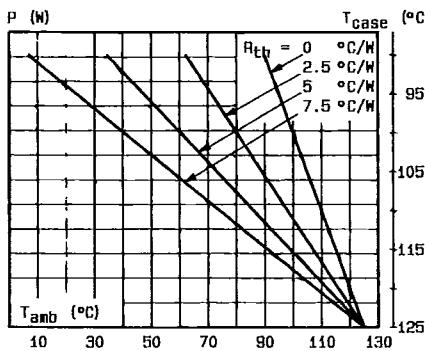


Fig.2 - Correlation between maximum mean power dissipation and maximum allowable temperatures (T_{amb} and T_{case}) for different thermal resistances heatsink + contact.

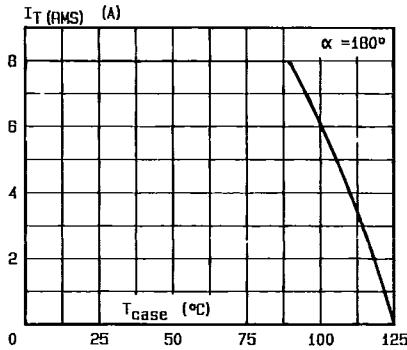


Fig.3 - RMS on-state current versus case temperature.

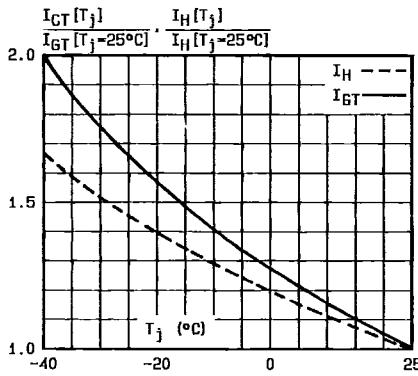


Fig.5 - Relative variation of gate trigger current and holding current versus junction temperature.

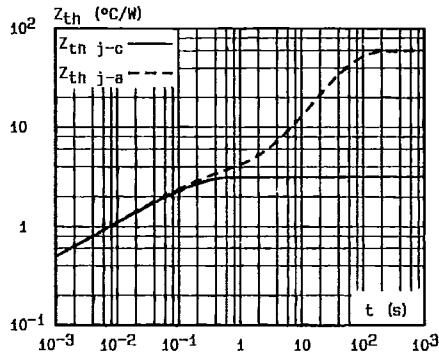


Fig.4 - Thermal transient impedance junction to case and junction to ambient versus pulse duration.

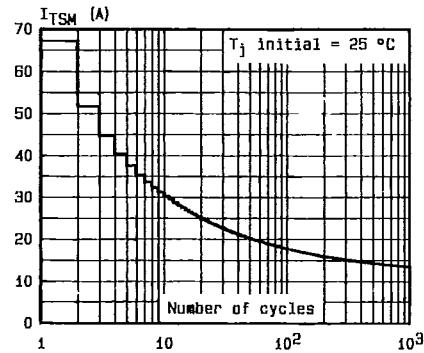


Fig.6 - Non repetitive surge peak on-state current versus number of cycles.

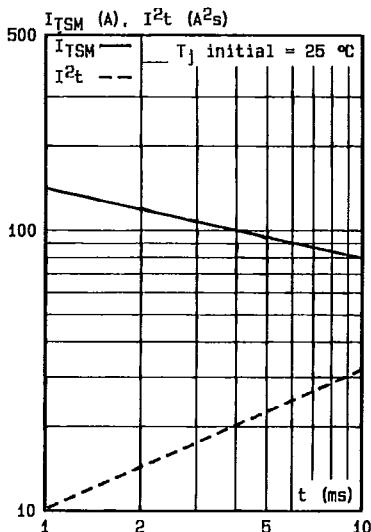


Fig.7 - Non repetitive surge peak on-state current for a sinusoidal pulse with width : $t \leq 10$ ms, and corresponding value of I^2t .


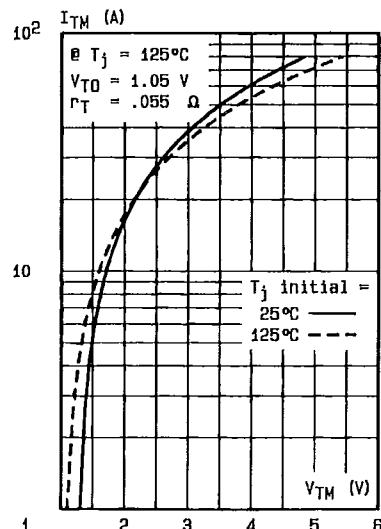


Fig.8 - On-state characteristics (maximum values).

PACKAGE MECHANICAL DATA

TO 220 AB (CB-415) Plastic

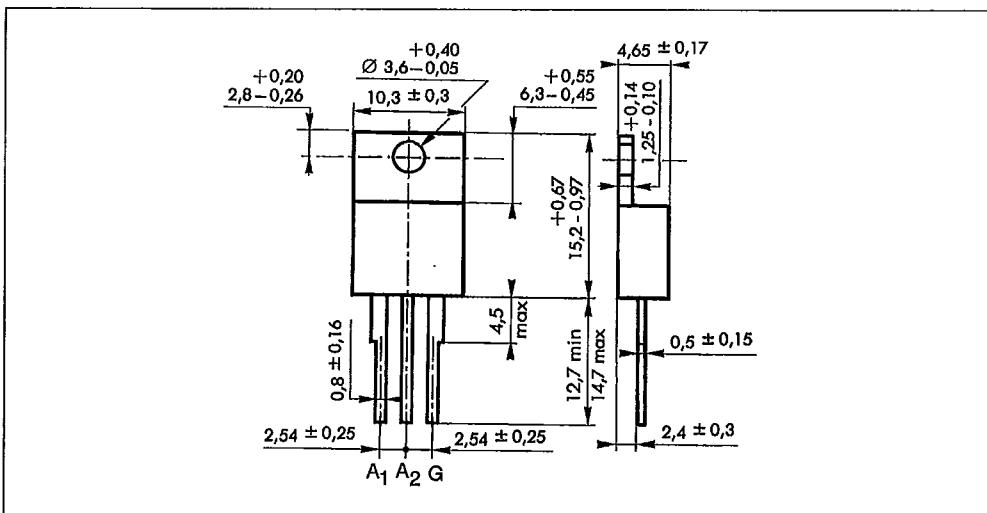

Cooling method : by conduction (method C)

Marking : type number

Weight : 2 g