
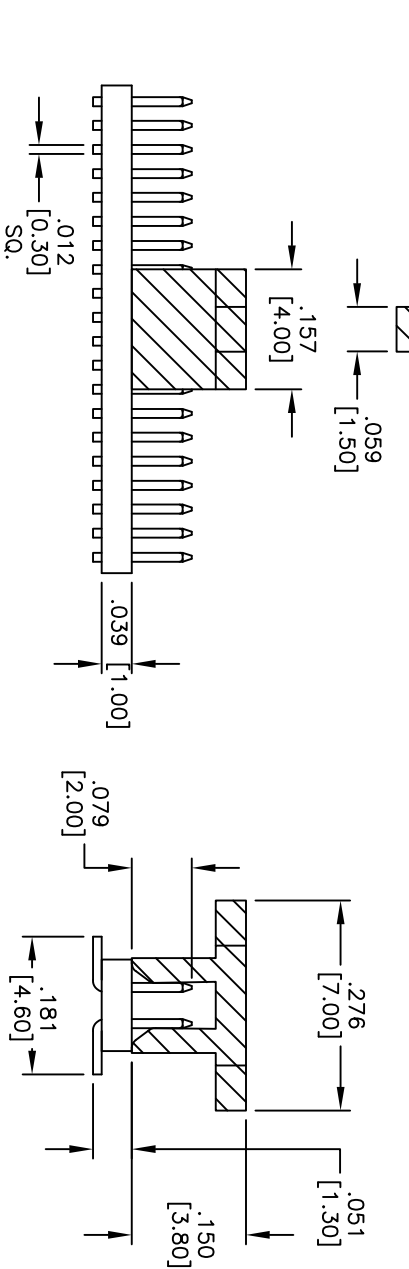


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/27/15	

APPROVED: _____
 DATE: _____ TITLE: _____

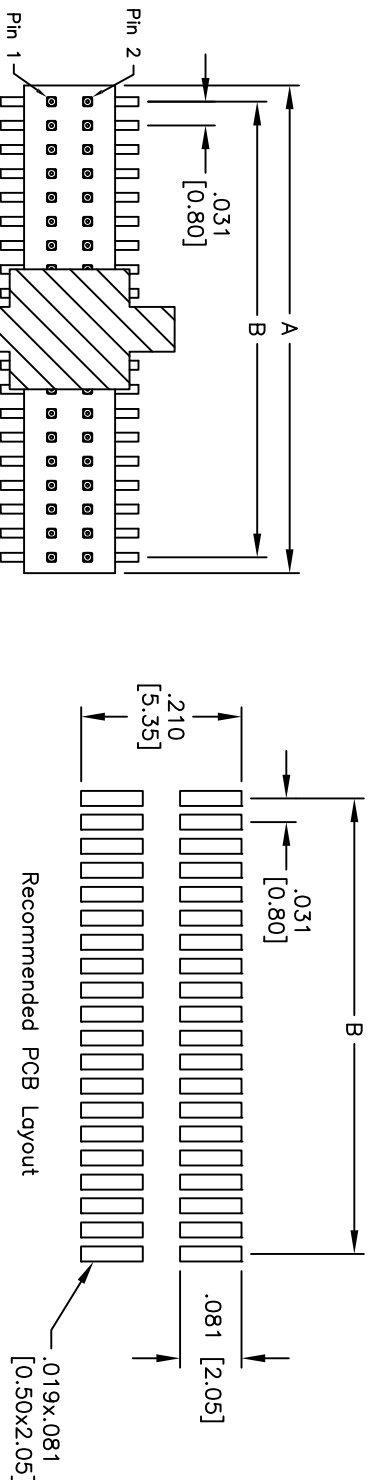

PACKAGING: PACKAGED ON TAPE & REEL
 Positions: 6 thru 100
 A = .031 [0.80] x No. of Positions Per Row
 B = .031 [0.80] x No. of Spaces

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

SPECIFICATIONS:
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Tin over Copper underplate overall
 Electrical: Current rating: 1 Amp max.
 Contact resistance: 15 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS	DATE
DRAWN AY	1/27/15
CHECKED AC	1/27/15
APPROVED	

TITLE	SIZE	PART NO.	REV.
.031 [0.80] DUAL ROW SUB-MICRO PIN HEADER SURFACE MOUNT, PEGS, WITH CAP & TAPE REEL	X	SPH2-XX-I-SMT-PP-T/R	-

REF:	SCALE:	SHEET	OF	1
S00039T	NIS	1	1	1



6 5 4 3 2 1