
Bi-Directional Triode Thyristor


Symbol



Features

- ◆ Repetitive Peak Off-State Voltage : 600V
- ◆ R.M.S On-State Current ($I_{T(RMS)}$= 4 A)
- ◆ High Commutation dv/dt

TO-126



General Description

This device is suitable for low power AC switching application, phase control application such as fan speed and temperature modulation control, lighting control and static switching relay.

Absolute Maximum Ratings (T_J = 25°C unless otherwise specified)

Symbol	Parameter	Condition	Ratings	Units
V_{DRM}	Repetitive Peak Off-State Voltage		600	V
$I_{T(RMS)}$	R.M.S On-State Current	T_C = 104 °C	4	A
I_{TSM}	Surge On-State Current	One Cycle, 50Hz/60Hz, Peak, Non-Repetitive	25/27	A
I^2t	I^2t	t = 10ms	3.1	A^2s
P_{GM}	Peak Gate Power Dissipation		5	W
$P_{G(AV)}$	Average Gate Power Dissipation	Over any 20ms period	0.5	W
I_{GM}	Peak Gate Current		2	A
V_{GM}	Peak Gate Voltage		5	V
T_J	Operating Junction Temperature		- 40 ~ 125	°C
T_{STG}	Storage Temperature		- 40 ~ 150	°C

copyright@SemiWell Semiconductor Co., Ltd., All rights reserved.

Electrical Characteristics

Symbol	Items		Conditions	Ratings			Unit
				Min.	Typ.	Max.	
I_{DRM}	Repetitive Peak Off-State Current		$V_D = V_{DRM}$, Single Phase, Half Wave T_J = 125 °C	—	—	0.5	mA
V_{TM}	Peak On-State Voltage		I_T = 5 A, Inst. Measurement	—	—	1.7	V
I^+_{GT1}	I	Gate Trigger Current	V_D = 6 V, R_L=10 Ω	—	—	25	mA
I^-_{GT1}	II			—	—	25	
I^-_{GT3}	III			—	—	25	
I^+_{GT3}	IV			—	—	70	
V^+_{GT1}	I	Gate Trigger Voltage	V_D = 6 V, R_L=10 Ω	—	—	1.5	V
V^-_{GT1}	II			—	—	1.5	
V^-_{GT3}	III			—	—	1.5	
V^+_{GT3}	IV			—	—	2.5	
V_{GD}	Non-Trigger Gate Voltage		T_J = 125 °C, V_D = 1/2 V_{DRM}	0.2	—	—	V
(dv/dt)c	Critical Rate of Rise Off-State Voltage at Commutation		T_J = 125 °C, [di/dt]c = -0.75 A/ms, V_D=2/3 V_{DRM}	5.0	—	—	V/μs
I_H	Holding Current			—	5	—	mA
$R_{th(j-c)}$	Thermal Impedance		Junction to case	—	—	3.5	°C/W

Fig 1. Gate Characteristics

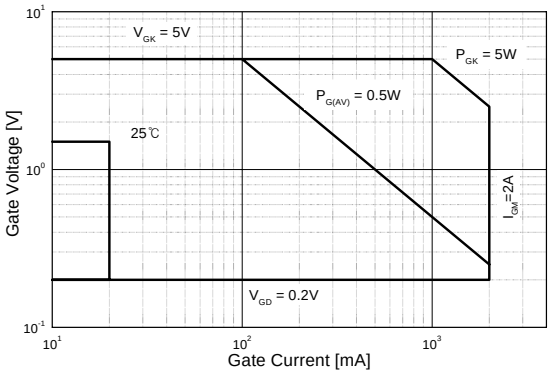


Fig 2. On-State Voltage

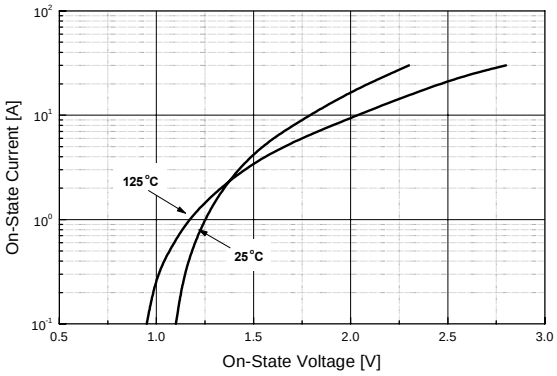


Fig 3. On State Current vs. Maximum Power Dissipation

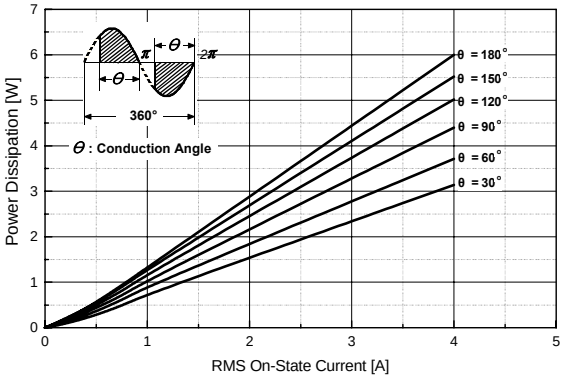


Fig 4. On State Current vs. Allowable Case Temperature

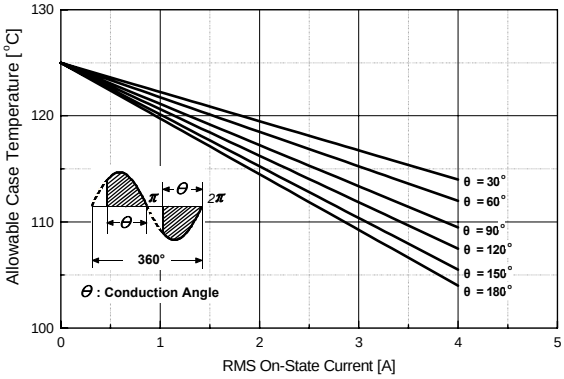


Fig 5. Surge On-State Current Rating (Non-Repetitive)

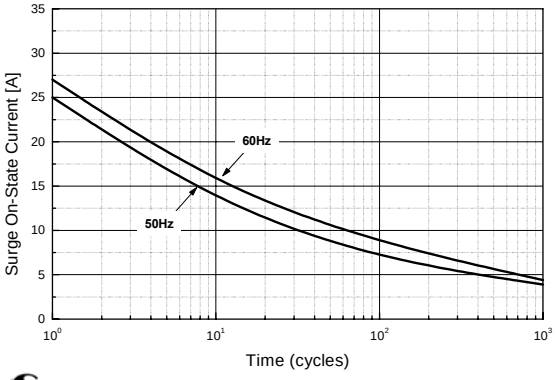


Fig 6. Gate Trigger Voltage vs. Junction Temperature

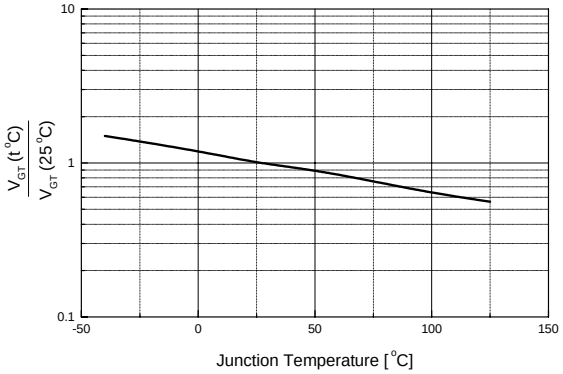


Fig 7. Gate Trigger Current vs. Junction Temperature

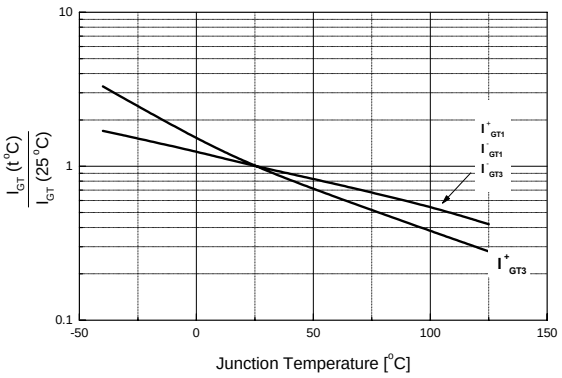


Fig 8. Transient Thermal Impedance



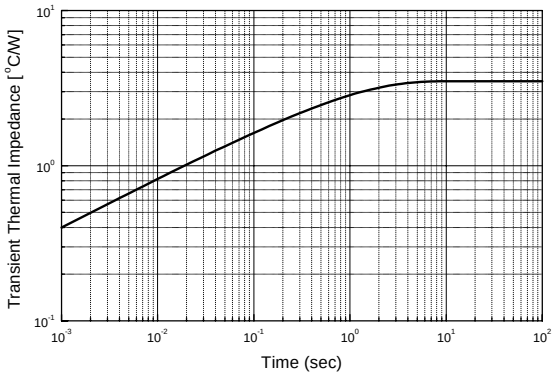


Fig 9. Gate Trigger Characteristics Test Circuit

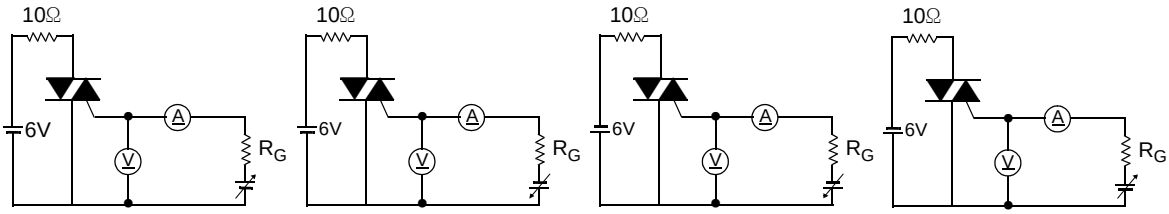

TO-126 Package Dimension

Dim.	mm			Inch		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	7.5		7.9	0.295		0.311
B	10.8		11.2	0.425		0.441
C	14.2		14.7	0.559		0.579
D	2.7		2.9	0.106		0.114
E		3.8			0.150	
F		2.5			0.098	
G	1.2		1.5	0.047		0.059
H		2.3			0.091	
I		4.6			0.181	
J	0.48		0.62	0.019		0.024
K	0.7		0.86	0.028		0.034
L		1.4			0.055	
ϕ		3.2			0.126	

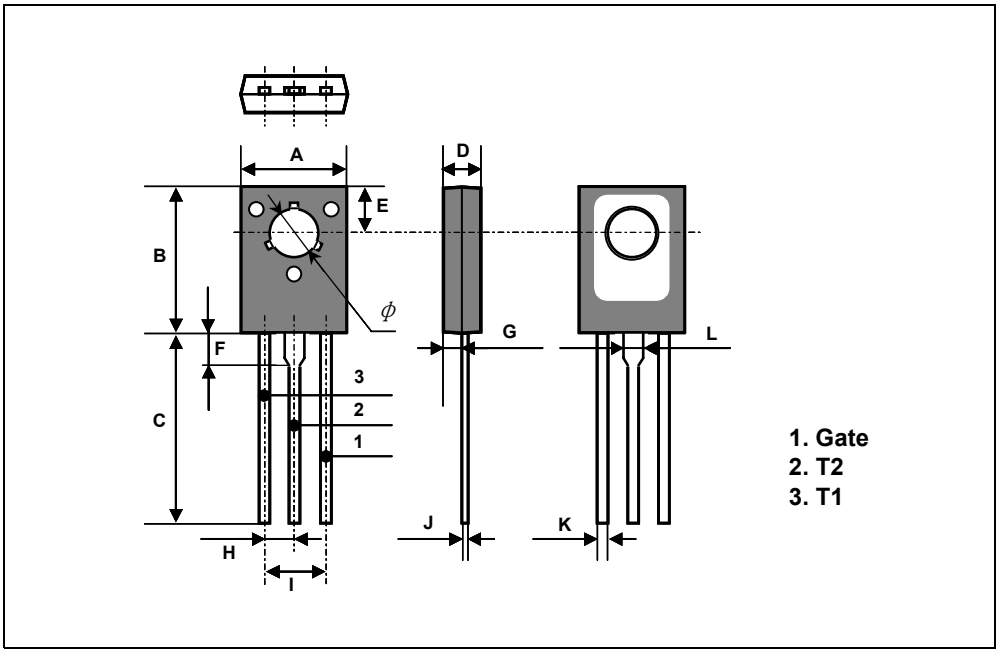

TO-126 Package Dimension, Forming

Dim.	mm			Inch		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	7.5		7.9	0.295		0.311
B	10.8		11.2	0.425		0.441
C	14.2		14.7	0.559		0.579
D	2.7		2.9	0.106		0.114
E		3.8			0.150	
F		2.5			0.098	
G	1.2		1.5	0.047		0.059
H		2.3			0.091	
I		4.6			0.181	
J	0.48		0.62	0.019		0.024
K	0.7		0.86	0.028		0.034
L		1.4			0.055	
M		5.0			0.197	
ϕ		3.2			0.126	

