

KR Electronics 2582

General Description


KR 2582 is a 100 MHz bandpass filter. The filter has a minimum 3 dB bandwidth of 20 MHz and is designed for 50 Ω source and load impedance. Other center frequencies and bandwidths are available. Also available in a surface mount package. Please consult the factory.

Features


- 100 MHz Bandpass
- Elliptic type response
- 50 Ω
- SMA Connectors
- Also available in SMT package

Typical Performance

Passband Amplitude & Group Delay
(1 dB/div & 10 nsec/div)

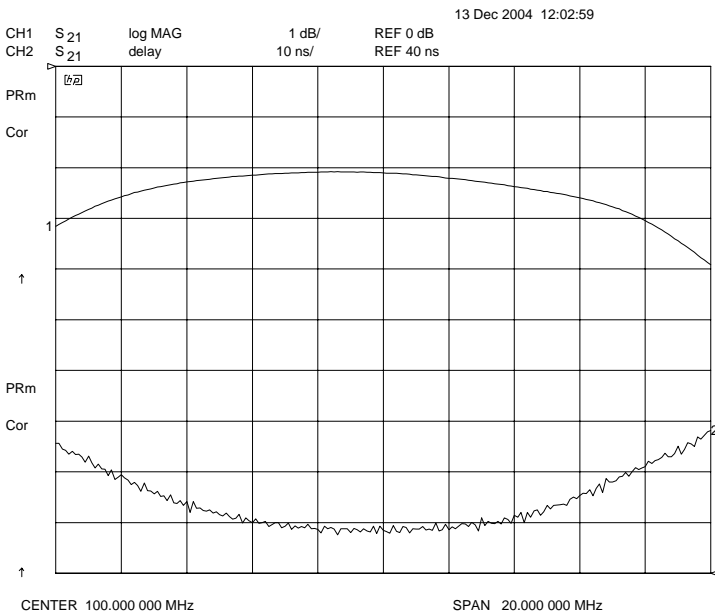

Overall Response
(10 dB/div)

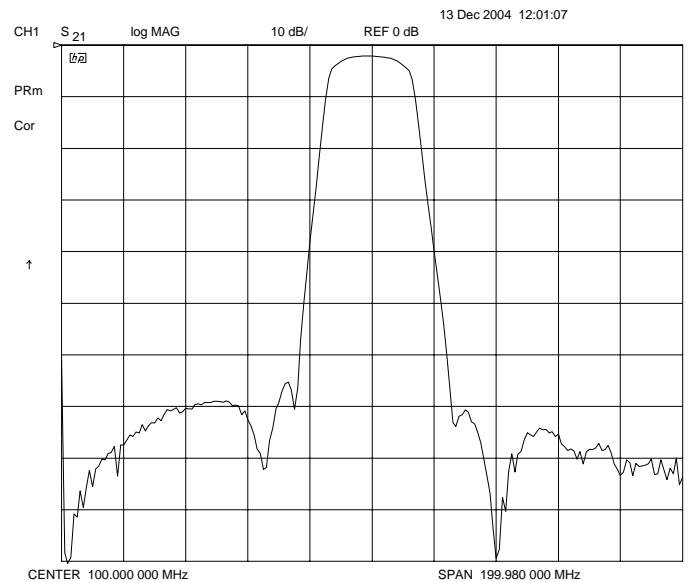

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2582

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	100 MHz
Insertion Loss	< 3 dB (2 dB typical)
Minimum 2 dB Bandwidth	20 MHz
Attenuation at 75 MHz	> 58 dB
Attenuation at 125 MHz	> 58 dB
Source & Load	50 Ω

Physical Dimensions

