



# ILLSU series

## Submersible Tank Gauging Level Transmitter



The ILLSU is designed for use in continuous submersion in liquids such as water, oils and fuels in small tanks, where conventional mechanical level switches and sensors are not ideal and more level 'control' and measurement is required.

The probe uses a piezo-resistive silicon sensing technology, isolated from the media by a diaphragm within the stainless steel housing. It offers excellent stability, repeatability and resolution for applications where a small tank level is required, from as low as 3ft through to 40 ft high tanks.

Each device is temperature compensated, calibrated and supplied with a traceable serial number and calibration certificate.

- Piezo-resistive sensor
- Stainless steel housing and diaphragm
- Accuracy <0.5% FS BFSL
- Various outputs including Volts and mA.
- Depth ranges from 0-48" (0-4ft) to 0-480" (0-40ft) WG

### Options available on the IMTG transmitter.

- Pressure range
- Voltage or current output
- Cable length

### Suitable applications

- Static tank level
- Container or chamber level
- Vehicle tank level
- IBC, IBC Tote or Pallet Tank
- Rainwater harvesting

### Performance

Accuracy (Non-Linearity & Hysteresis)	<±0.5% / FS (BFSL)	
Setting Errors (offsets)	2-wire	Zero & Full Scale, <±0.5% / FS
	3-wire	Zero & Full Scale, <±0.5% / FS
Permissible Load	2-wire	$R_{max} = [(Supply-9min)/0.02]\Omega$
	3-wire	$R_{min} = 10k\Omega$
Influence Effects	Supply	<0.005% FS / 1V
	Load	0.05% FSO / kΩ

Custom versions can be made for particular applications.

### Electrical Protection

Supply reverse polarity	No damage/no function
Electromagnetic compatibility	CE Compliant

### Mechanical Stability

Shock	100g / 11s
Vibration	10g RMS (20 - 2000Hz)

### Temperatures & Thermal Effects

Media Temperature	-20°C (Non-freezing) to +60°C
Storage temperature	-20°C to +70°C
Compensated temperature range	20°C±25°C
Thermal Zero Shift (TZS)	<±0.04% /FS/°C
Thermal Span Shift (TSS)	<±0.015% /°C

### Material Specifications

Housing	303 Stainless Steel
"O" ring seals	Viton
Diaphragm	316L Stainless Steel
Cable sheath material	FEP standard
Media wetted parts	Housing, "O" ring seal, diaphragm, cable sheath
Weight	Transmitter: approx 2.65oz (75g) Cable: 1.7oz (48g) per yard
Installation position	Any, small zero shift when tilted through 90°
Operational life	> 100x 10 <sup>6</sup> cycles
Insulation resistance	50MΩ@50Vdc

Cynergy3 Components Ltd.  
 7 Cobham Road  
 Ferndown Industrial Estate  
 Wimborne, Dorset BH21 7PE  
 Telephone +44 (0) 1202 897969  
 Email:sales@cynergy3.com

ISO9001 CERTIFIED

www.cynergy3.com



# ILLSU series

## Submersible Tank Gauging Level Transmitter

### Pressure Ranges and Passive mV/V Outputs

Nominal Pressure, Gauge	inchWG	40	100	200	280	400
Permissible Overpressure	inchWG	800	800	800	2000	2000


### Output Signals and Supply Voltages

Wire system Output	Supply Voltage	Connection	Wire Colours
2-wire 4-20mA	9-32Vdc	+ve Supply	Brown
		-ve Supply	White
		Ground	Pink
		Cable Screen	Green
3-wire 0.5-4.5Vdc non-ratiometric	9-32Vdc	+ve Supply	Brown
		-ve Supply	White
		+ve Output	Yellow
		Ground	Pink
		Cable Screen	Green

Care must be taken regarding screening and earthing when using voltage output

Part No	Pressure Range	Cable Length	Output
ILLSU-Gi048-5-003	0-48" WG	10ft	4-20mA
ILLSU-Gi120-5-005	0-120" WG	16ft	4-20mA
ILLSU-Gi240-5-008	0-240" WG	26ft	4-20mA
ILLSU-Gi360-5-012	0-360" WG	40ft	4-20mA
ILLSU-Gi480-5-016	0-480" WG	52ft	4-20mA
ILLSU-Gi048-D-003	0-48" WG	10ft	0.5 to 4.5V 3Wire
ILLSU-Gi120-D-005	0-120" WG	16ft	0.5 to 4.5V 3Wire
ILLSU-Gi240-D-008	0-240" WG	26ft	0.5 to 4.5V 3Wire
ILLSU-Gi360-D-012	0-360" WG	40ft	0.5 to 4.5V 3Wire
ILLSU-Gi480-D-016	0-480" WG	52ft	0.5 to 4.5V 3Wire

(Custom ranges and outputs available on request)

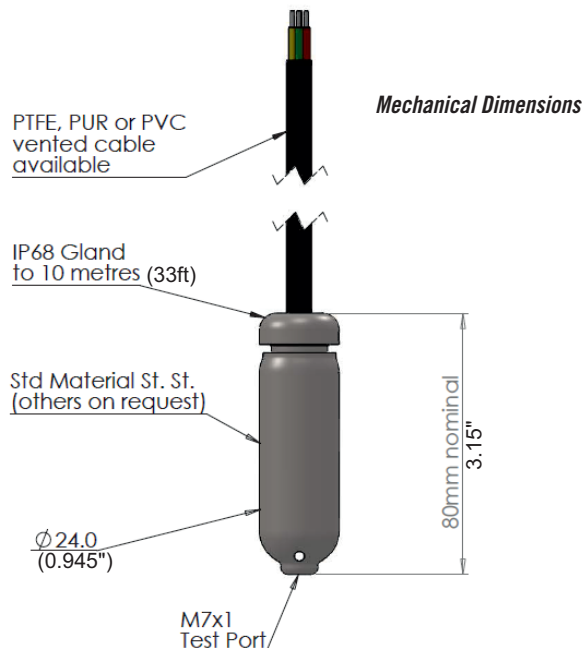

ISO9001 CERTIFIED

ILLSU 2015

www.cynergy3.com