Ordering number : ENN*6271

CMOS IC

LC75342, 75342M

Single-Chip Volume and Tone Control System

Preliminary

Overview

The LC75342 and LC75342M are electronic volume and tone control systems that provide volume, balance, a 2-band equalizer, and input switching functions that can be controlled from serially transferred data.

Functions

- Volume: 0 dB to –79 dB (in 1-dB steps) and –∞, for a total of 81 settings.
  The volume can be controlled independently in the left and right channels to implement a balance function.
- Bass boost: Up to +20 dB in 2-dB steps. Peaking characteristics.
- Treble: ±10 dB in 2-dB steps. Shelving characteristics.
- Selector: One of four sets of left/right inputs can be selected.
- Input gain: The input signal can be boosted by from 0 dB to +30 dB in 2-dB steps.


Features

- On-chip buffer amplifiers minimize the number of external components.
- Fabricated in a silicon gate CMOS process to minimize switching noise from internal switches.
- Built-in analog ground reference voltage generation circuit.
- All controls can be set from serially transferred data. Supports the CCB standard.

Package Dimensions


unit: mm

3196-DIP30SD

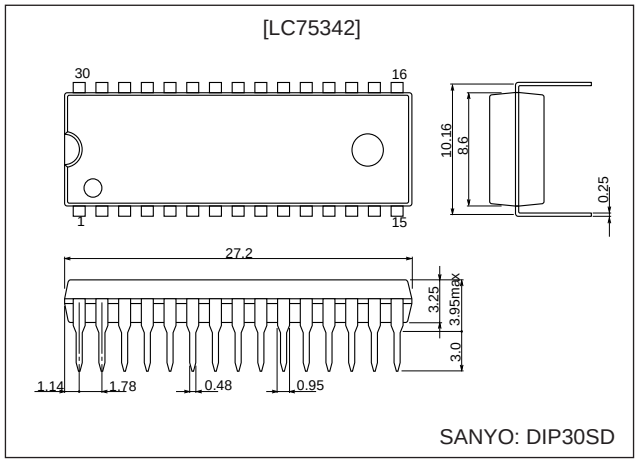

unit: mm

3216-MFP30S

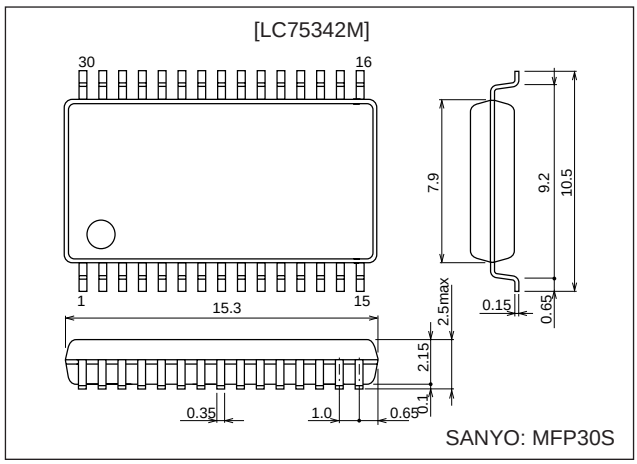

- **CCB is a trademark of SANYO ELECTRIC CO., LTD.**
- **CCB is a SANYO's original bus format and all the bus addresses are controlled by SANYO.**

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co.,Ltd. Semiconductor Company
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

Specifications

Absolute Maximum Ratings at Ta = 25°C, V_{SS} = 0 V

Parameter	Symbol	Pin	Conditions		Ratings	Unit
Maximum supply voltage	V_{DD} max	V_{DD}			11	V
Maximum input voltage	V_{IN} max	CE, DI, CL, L1 to L4, R1 to R4, LIN, RIN			V_{SS} – 0.3 to V_{DD} + 0.3	V
Allowable power dissipation	Pdmax		Ta ≤ 75°C	LC75342	450	mW
			Ta ≤ 75°C with a PCB*	LC75342M	450	
Operating temperature	Topr				–30 to +75	°C
Storage temperature	Tstg				–40 to +125	°C

Note: * Printed circuit board size: 76.1 × 114.3 × 1.6 mm, printed circuit board material: glass/epoxy resin

Allowable Operating Ranges at Ta = –30 to +75°C, V_{SS} = 0 V

Parameter	Symbol	Pin	Conditions	Ratings			Unit
				min	typ	max	
Supply voltage	V_{DD}	V_{DD}		4.5		10	V
High-level input voltage	V_{IH}	CL, DI, CE		2.7		10	V
Low-level input voltage	V_{IL}	CL, DI, CE	7.5 ≤ V_{DD} ≤ 10.0	V_{SS}		1.0	V
			4.5 ≤ V_{DD} < 7.5	V_{SS}		0.8	
Input voltage amplitude	V_{IN}	CE, DI, CL, L1 to L4, R1 to R4, LIN, RIN		V_{SS}		V_{DD}	Vp-p
Input pulse width	tøW	CL		1			µs
Setup time	tsetup	CL, DI, CE		1			µs
Hold time	thold	CL, DI, CE		1			µs
Operating frequency	fopg	CL				500	kHz

Electrical Characteristics at Ta = 25°C, V_{DD} = 9 V, V_{SS} = 0 V

Input Block

Parameter	Symbol	Pin	Conditions	Ratings			Unit
				min	typ	max	
Maximum input gain	Gin max				+30		dB
Step resolution	Gstep				+2		dB
Input resistance	Rin	L1, L2, L3, L4 R1, R2, R3, R4			50		kΩ
Clipping level	Vcl	LSEL0, RSEL0	THD = 1.0%, f = 1 kHz		2.90		Vrms
Output load resistance	Rl	LSEL0, RSEL0		10			kΩ

Volume Control Block

Parameter	Symbol	Pin	Conditions	Ratings			Unit
				min	typ	max	
Input resistance	Rin	L_{IN}, R_{IN}			50		kΩ

Bass Band Equalizer Control Block

Parameter	Symbol	Pin	Conditions	Ratings			Unit
				min	typ	max	
Control range	Geq		max.boost	±18	±20	±22	dB
Step resolution	Estep			1	2	3	dB
Internal feedback resistance	Rfeed				66.6		kΩ


Treble Band Equalizer Control Block

Parameter	Symbol	Pin	Conditions	Ratings			Unit
				min	typ	max	
Control range	Geq		max.boost/cut	±8	±10	±12	dB
Step resolution	Estep			1	2	3	dB
Internal feedback resistance	Rfeed				51.7		kΩ

Overall Characteristics


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Total harmonic distortion	THD	V_{IN} = 1 Vrms, f = 1 kHz, all flat overall			0.01	%
Crosstalk	CT	V_{IN} = 1 Vrms, f = 1 kHz, Rg = 1 kΩ, all flat overall	80			dB
Output noise voltage	V_N	All flat overall, 80 kHz, L.P.F		9.3		μV
Maximum attenuation	Vomin	All flat overall, f = 1 kHz		–90		dB
Current drain	I_{DD}	$V_{DD} – V_{SS}$ = +10 V		37		mA
High-level input current	I_{IH}	CL, DI, CE: V_{IN} = 10 V			10	μA
Low-level input current	I_{IL}	CL, DI, CE: V_{IN} = 0 V	–10			μA

Pin Assignment

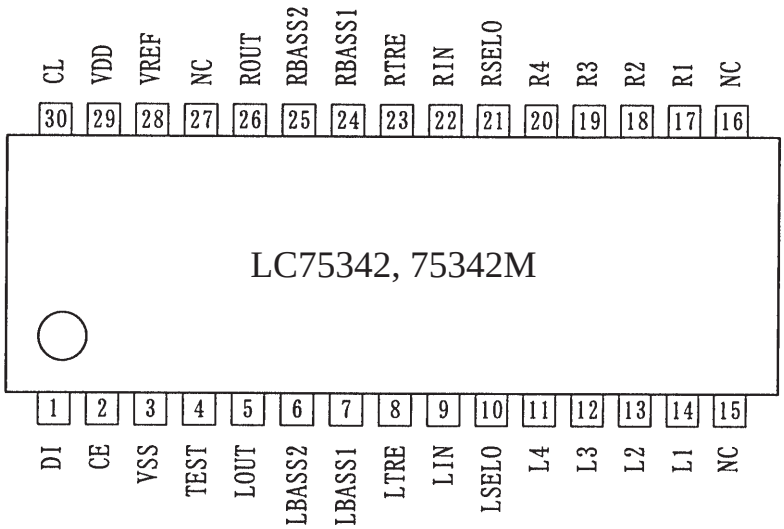


(Top view)

Equivalent Circuit

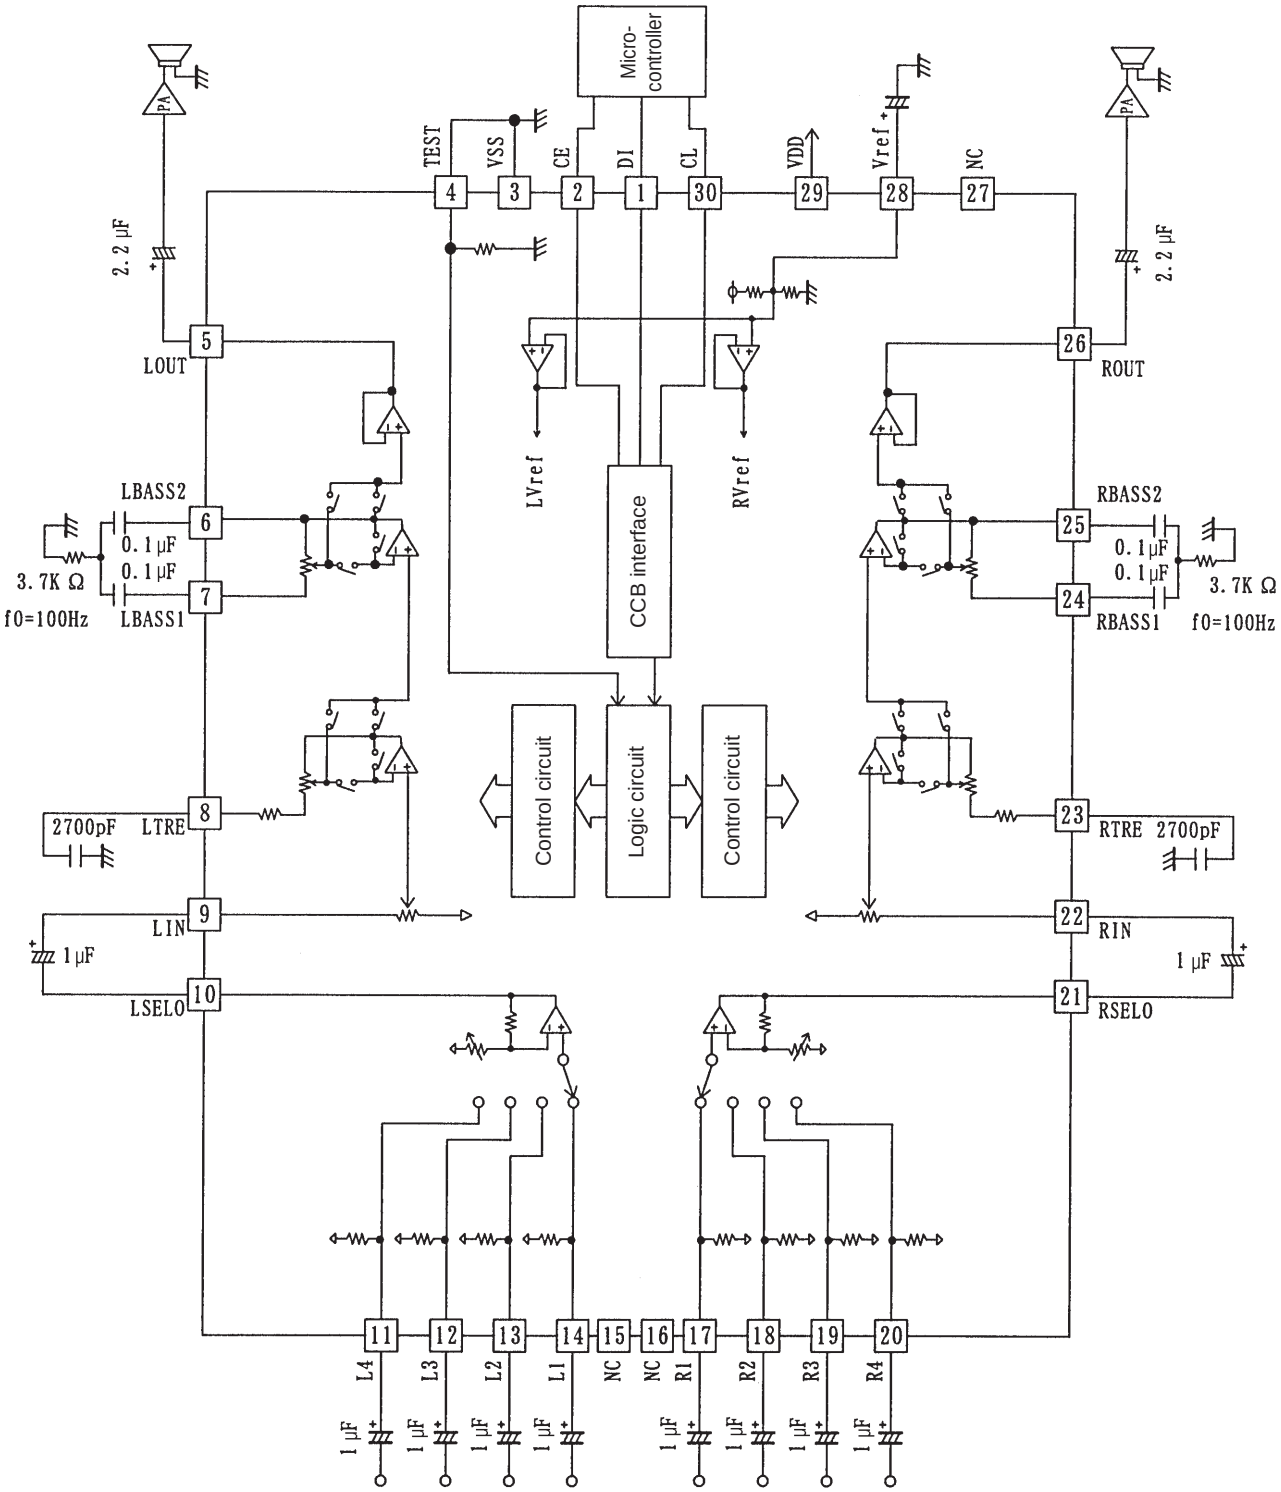

Control System Timing and Data Format

Applications control the LC75342 and LC75342M by applying the stipulated serial data to the CL, DI, and CE pins. This data consists of a total of 40 bits, of which 8 bits are the address and 32 bits are the data itself.

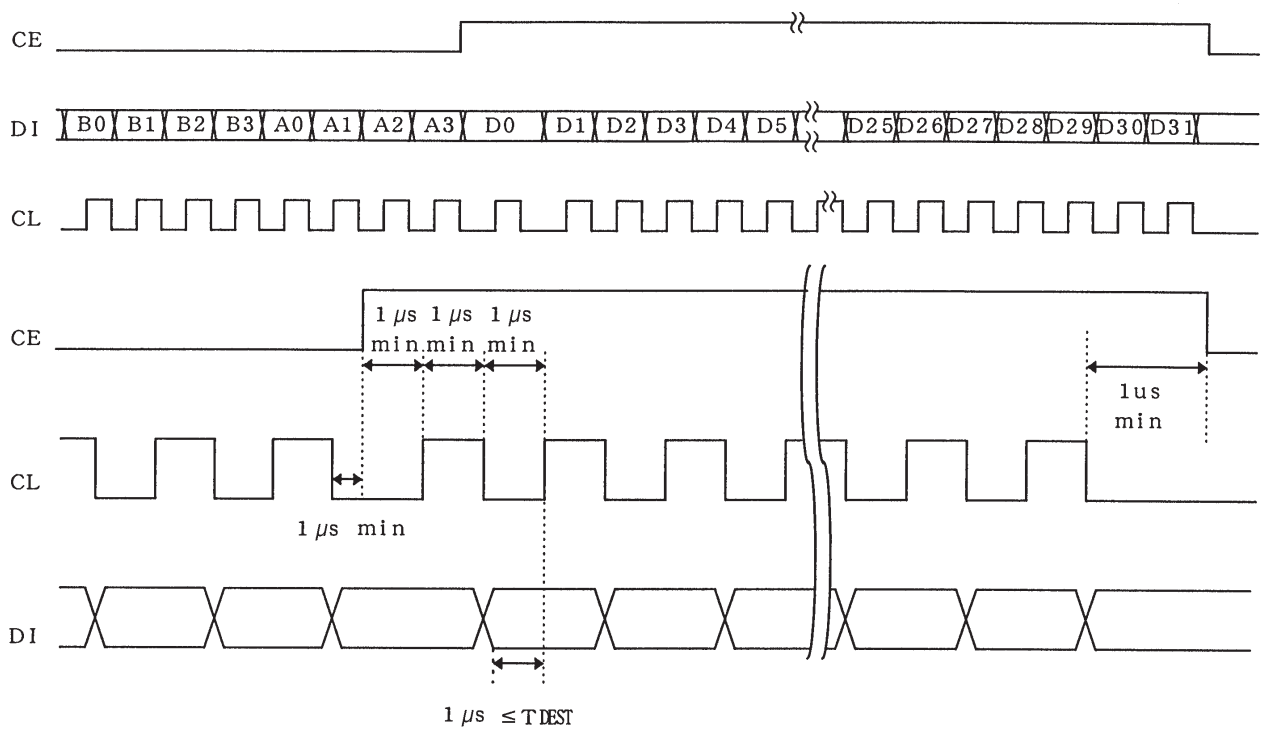

- Address code (B0 to A3)

  The LC75342 and LC75342M have an 8-bit address code, and can be used together with other ICs that support the Sanyo CCB serial bus format.

Address code (LSB)

B0	B1	B2	B3	A0	A1	A2	A3
0	1	0	0	0	0	0	1

(82HEX)

- Control code allocation

Input switching control (L1, L2, L3, L4, R1, R2, R3, R4)

D0	D1	D2	D3	Operation
0	0	0	0	L1 (R1) ON
1	0	0	0	L2 (R2) ON
0	1	0	0	L3 (R3) ON
1	1	0	0	L4 (R4) ON
0	0	1	0	All switches off
1	0	1	0	All switches off
0	1	1	0	All switches off
1	1	1	0	All switches off

Input Gain Control

D4	D5	D6	D7	Operation
0	0	0	0	0 dB
1	0	0	0	+2 dB
0	1	0	0	+4 dB
1	1	0	0	+6 dB
0	0	1	0	+8 dB
1	0	1	0	+10 dB
0	1	1	0	+12 dB
1	1	1	0	+14 dB
0	0	0	1	+16 dB
1	0	0	1	+18 dB
0	1	0	1	+20 dB
1	1	0	1	+22 dB
0	0	1	1	+24 dB
1	0	1	1	+26 dB
0	1	1	1	+28 dB
1	1	1	1	+30 dB

Volume Control

D8	D9	D10	D11	D12	D13	D14	D15	Operation
0	0	0	0	0	0	0	0	0 dB
1	0	0	0	0	0	0	0	–1 dB
0	1	0	0	0	0	0	0	–2 dB
1	1	0	0	0	0	0	0	–3 dB
0	0	1	0	0	0	0	0	–4 dB
1	0	1	0	0	0	0	0	–5 dB
0	1	1	0	0	0	0	0	–6 dB
1	1	1	0	0	0	0	0	–7 dB
0	0	0	1	0	0	0	0	–8 dB
1	0	0	1	0	0	0	0	–9 dB
0	1	0	1	0	0	0	0	–10 dB
1	1	0	1	0	0	0	0	–11 dB
0	0	1	1	0	0	0	0	–12 dB
1	0	1	1	0	0	0	0	–13 dB
0	1	1	1	0	0	0	0	–14 dB
1	1	1	1	0	0	0	0	–15 dB
0	0	0	0	1	0	0	0	–16 dB
1	0	0	0	1	0	0	0	–17 dB
0	1	0	0	1	0	0	0	–18 dB
1	1	0	0	1	0	0	0	–19 dB
0	0	1	0	1	0	0	0	–20 dB
1	0	1	0	1	0	0	0	–21 dB
0	1	1	0	1	0	0	0	–22 dB
1	1	1	0	1	0	0	0	–23 dB
0	0	0	1	1	0	0	0	–24 dB
1	0	0	1	1	0	0	0	–25 dB
0	1	0	1	1	0	0	0	–26 dB
1	1	0	1	1	0	0	0	–27 dB
0	0	1	1	1	0	0	0	–28 dB
1	0	1	1	1	0	0	0	–29 dB
0	1	1	1	1	0	0	0	–30 dB
1	1	1	1	1	0	0	0	–31 dB
0	0	0	0	0	1	0	0	–32 dB
1	0	0	0	0	1	0	0	–33 dB
0	1	0	0	0	1	0	0	–34 dB
1	1	0	0	0	1	0	0	–35 dB
0	0	1	0	0	1	0	0	–36 dB
1	0	1	0	0	1	0	0	–37 dB
0	1	1	0	0	1	0	0	–38 dB
1	1	1	0	0	1	0	0	–39 dB
0	0	0	1	0	1	0	0	–40 dB
1	0	0	1	0	1	0	0	–41 dB
0	1	0	1	0	1	0	0	–42 dB
1	1	0	1	0	1	0	0	–43 dB
0	0	1	1	0	1	0	0	–44 dB
1	0	1	1	0	1	0	0	–45 dB
0	1	1	1	0	1	0	0	–46 dB
1	1	1	1	0	1	0	0	–47 dB
0	0	0	0	1	1	0	0	–48 dB
1	0	0	0	1	1	0	0	–49 dB
0	1	0	0	1	1	0	0	–50 dB

Volume Control

D8	D9	D10	D11	D12	D13	D14	D15	Operation
1	1	0	0	1	1	0	0	–51 dB
0	0	1	0	1	1	0	0	–52 dB
1	0	1	0	1	1	0	0	–53 dB
0	1	1	0	1	1	0	0	–54 dB
1	1	1	0	1	1	0	0	–55 dB
0	0	0	1	1	1	0	0	–56 dB
1	0	0	1	1	1	0	0	–57 dB
0	1	0	1	1	1	0	0	–58 dB
1	1	0	1	1	1	0	0	–59 dB
0	0	1	1	1	1	0	0	–60 dB
1	0	1	1	1	1	0	0	–61 dB
0	1	1	1	1	1	0	0	–62 dB
1	1	1	1	1	1	0	0	–63 dB
0	0	0	0	0	0	1	0	–64 dB
1	0	0	0	0	0	1	0	–65 dB
0	1	0	0	0	0	1	0	–66 dB
1	1	0	0	0	0	1	0	–67 dB
0	0	1	0	0	0	1	0	–68 dB
1	0	1	0	0	0	1	0	–69 dB
0	1	1	0	0	0	1	0	–70 dB
1	1	1	0	0	0	1	0	–71 dB
0	0	0	1	0	0	1	0	–72 dB
1	0	0	1	0	0	1	0	–73 dB
0	1	0	1	0	0	1	0	–74 dB
1	1	0	1	0	0	1	0	–75 dB
0	0	1	1	0	0	1	0	–76 dB
1	0	1	1	0	0	1	0	–77 dB
0	1	1	1	0	0	1	0	–78 dB
1	1	1	1	0	0	1	0	–79 dB
0	0	0	0	1	0	1	0	–∞ dB

Treble Control

D16	D17	D18	D19	Operation
1	0	1	0	+10 dB
0	0	1	0	+8 dB
1	1	0	0	+6 dB
0	1	0	0	+4 dB
1	0	0	0	+2 dB
0	0	0	0	0 dB
1	0	0	1	–2 dB
0	1	0	1	–4 dB
1	1	0	1	–6 dB
0	0	1	1	–8 dB
1	0	1	1	–10 dB

Bass Control

D20	D21	D22	D23	D24	D25	Operation
0	1	0	1	0	0	+20 dB
1	0	0	1	0	0	+18 dB
0	0	0	1	0	0	+16 dB
1	1	1	0	0	0	+14 dB
0	1	1	0	0	0	+12 dB
1	0	1	0	0	0	+10 dB
0	0	1	0	0	0	+8 dB
1	1	0	0	0	0	+6 dB
0	1	0	0	0	0	+4 dB
1	0	1	0	0	0	+2 dB
0	0	0	0	0	0	0 dB
1	0	0	0	1	0	–2 dB
0	1	0	0	1	0	–4 dB
1	1	0	0	1	0	–6 dB
0	0	1	0	1	0	–8 dB
1	0	1	0	1	0	–10 dB
0	1	1	0	1	0	–12 dB
1	1	1	0	1	0	–14 dB
0	0	0	1	1	0	–16 dB
1	0	0	1	1	0	–18 dB
0	1	0	1	1	0	–20 dB






Channel Selection

D26	D27	Operation
0	0	
1	0	RCH
0	1	LCH
1	1	Left and right together

Test Mode



D28	D29	D30	D31	Operation
0	0	0	0	
These bits are used for IC testing and must all be set to 0 during normal operation.				

Pin Functions

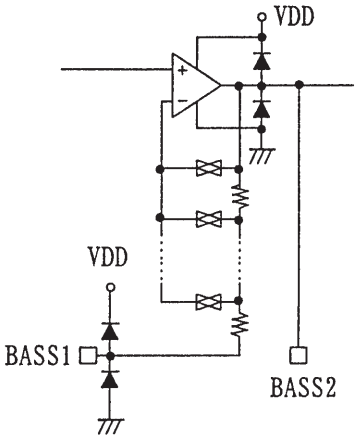Pin No.	Pin	Description	Notes
14 13 12 11 17 18 19 20	L1 L2 L3 L4 R1 R2 R3 R4	• Input signal connections	
10 21	LSEL0 RSEL0	• Input selector outputs	
7 6 24 25	LBASS1 LBASS2 RBASS1 RBASS2	• Connections for the resistors and capacitors that form the bass band filters.	
9 22	LIN RIN	• Volume control and equalizer input	
5 26	LOUT ROUT	• Volume and equalizer outputs	
8 23	LTRE RTRE	• Connections for the capacitors that form the treble band filters.	


Continued on next page.

Continued from preceding page.

Pin No.	Pin	Description	Notes
28	Vref	• Connection to the 0.5 × V_{DD} voltage generator circuit used as the analog signal ground. Applications must connect a capacitor of about 10 µF between this pin and V_{SS} to exclude power supply ripple.	
3	V_{SS}	• Ground	
29	V_{DD}	• Power supply	
2	CE	• Chip enable Data is written to the internal latch when this pin goes from high to low. The internal analog switches operate at this point. Data transfer is enabled when this pin is high.	
1 30	DI CL	• Serial data and clock inputs used for IC control.	
4	V_{SS}	• Electronic volume and tone control testing This pin must be tied to V_{SS} during normal operation.	
15 16 27	NC	• Unused. These pins must be left open or connected to V_{SS} during normal operation.	


Internal Equivalent Circuits

- Selector block equivalent circuit

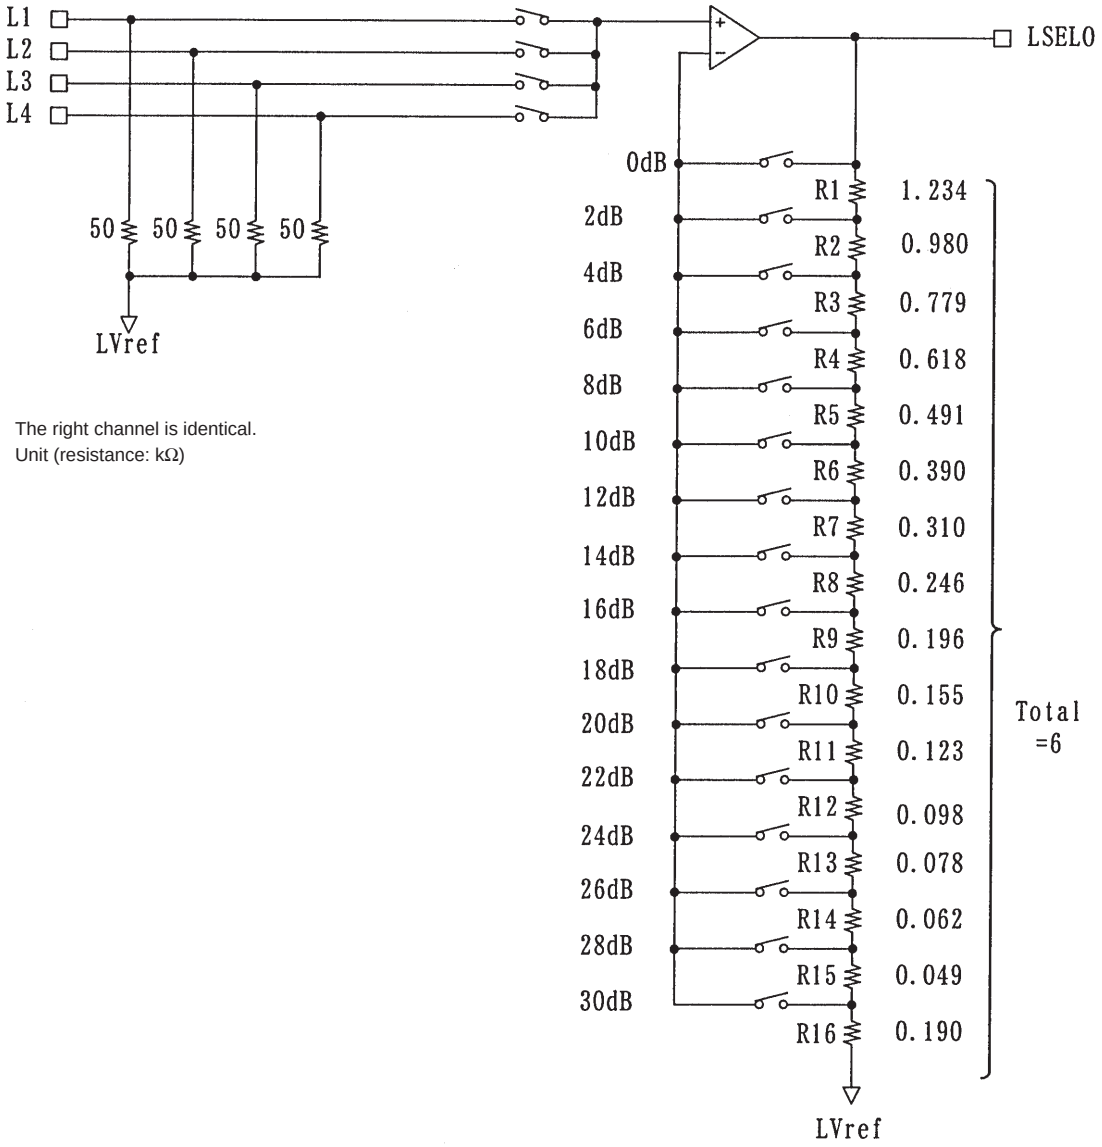

The right channel is identical.
Unit (resistance: kΩ)


• Treble and bass band block internal equivalent circuit

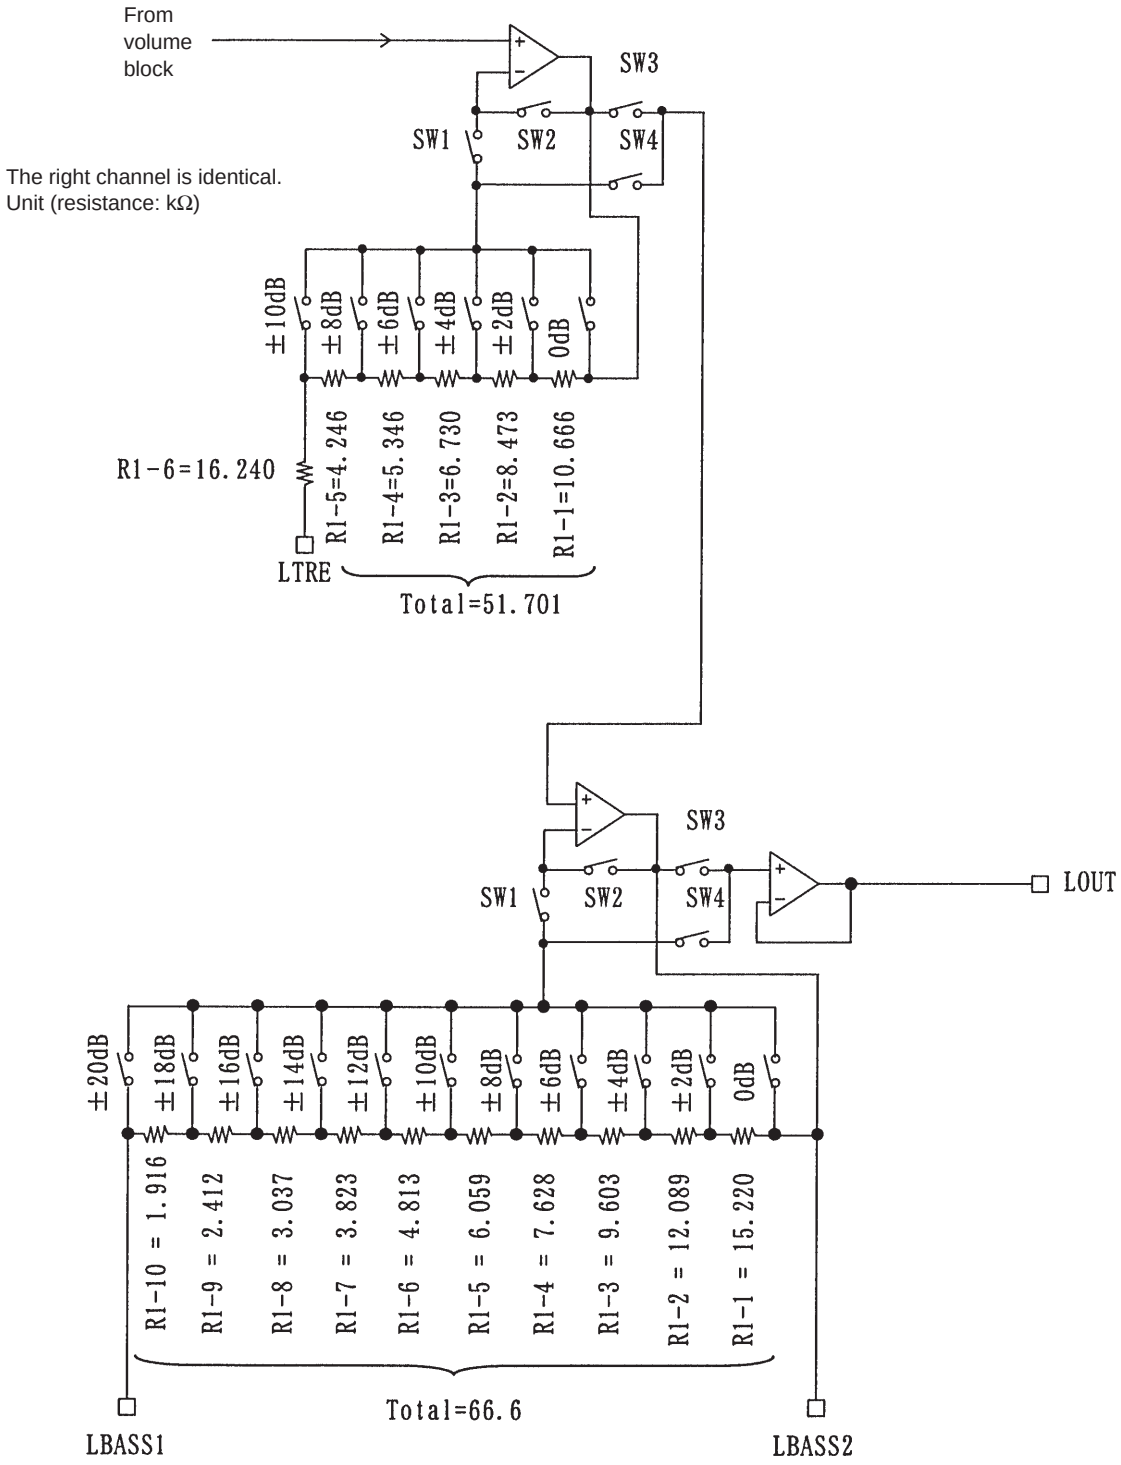

The right channel is identical.
Unit (resistance: kΩ)


Set switches SW1 and SW3 to the on position for boost, and set switches SW2 and SW4 to the on position for cut. For a flat (0 dB) response, set the 0dBSW, SW2, and SW3 switches on.

• Volume block internal equivalent circuit

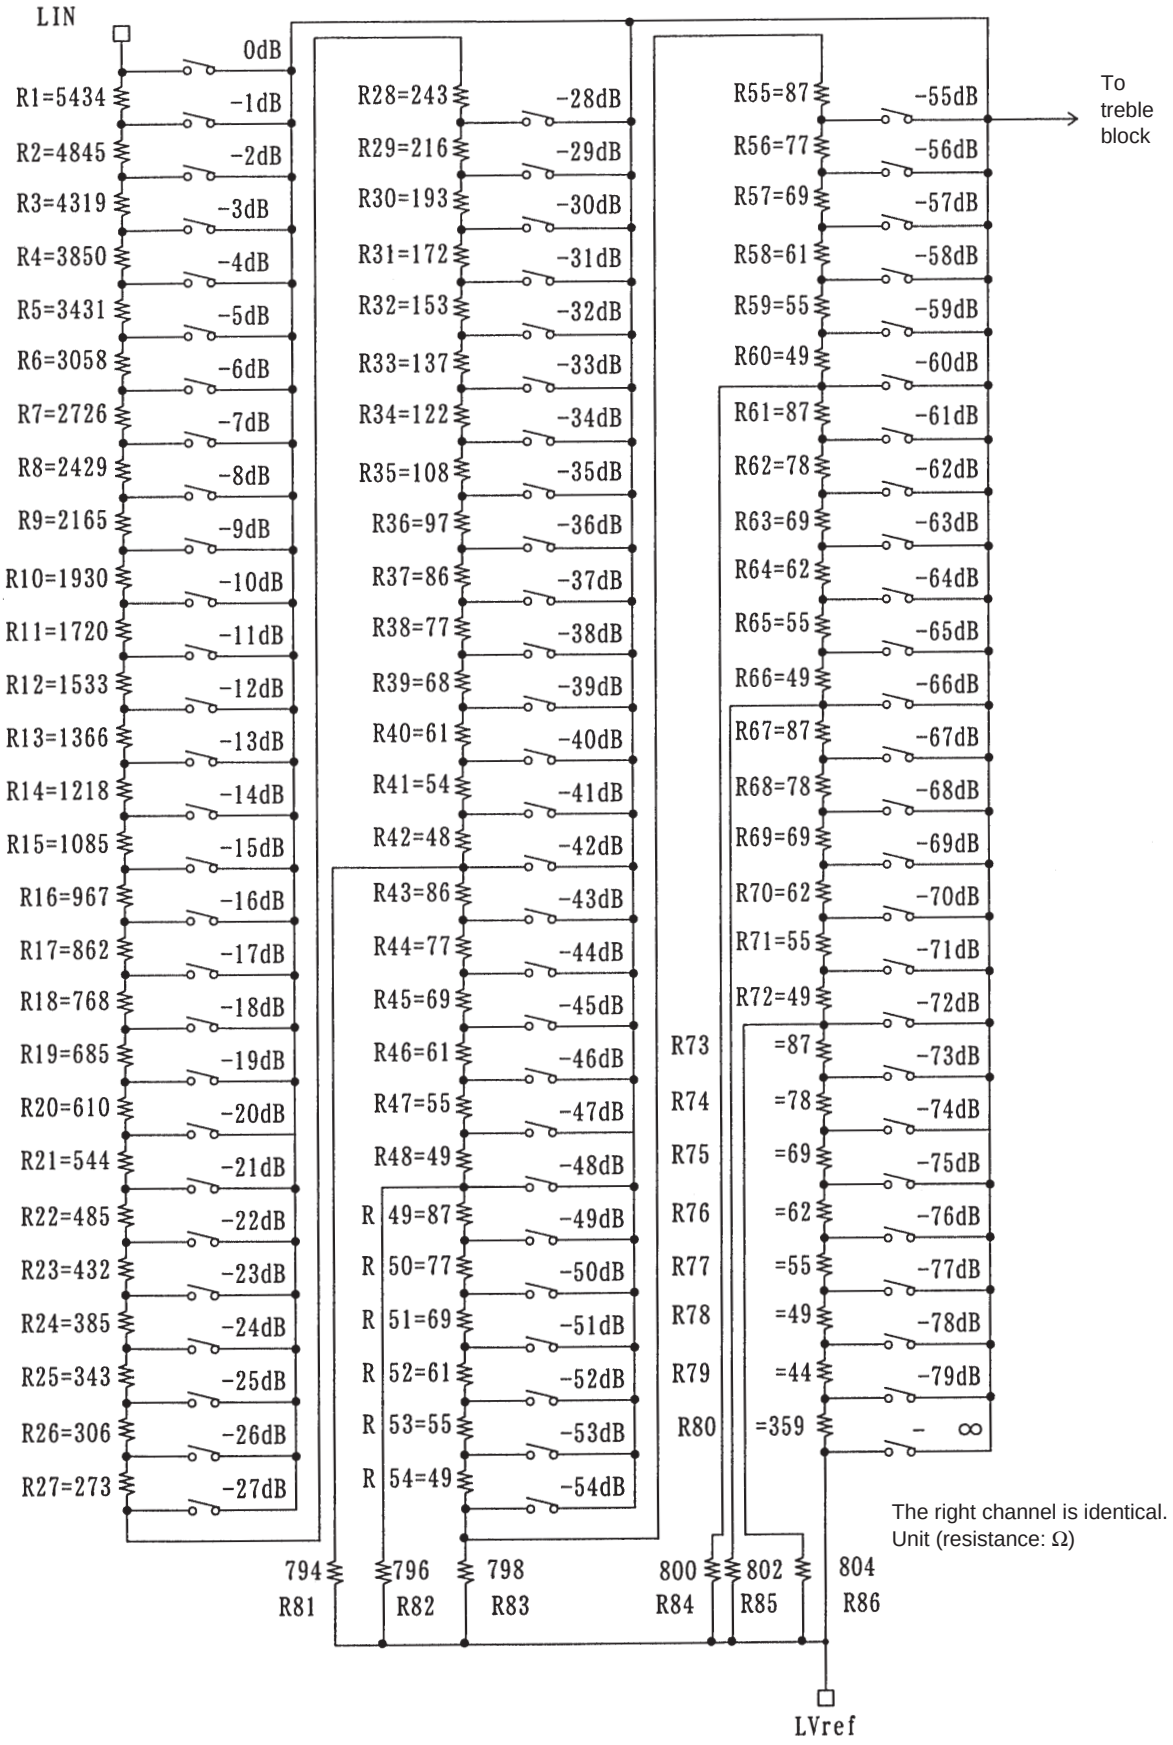


Test Circuits

• Total harmonic distortion

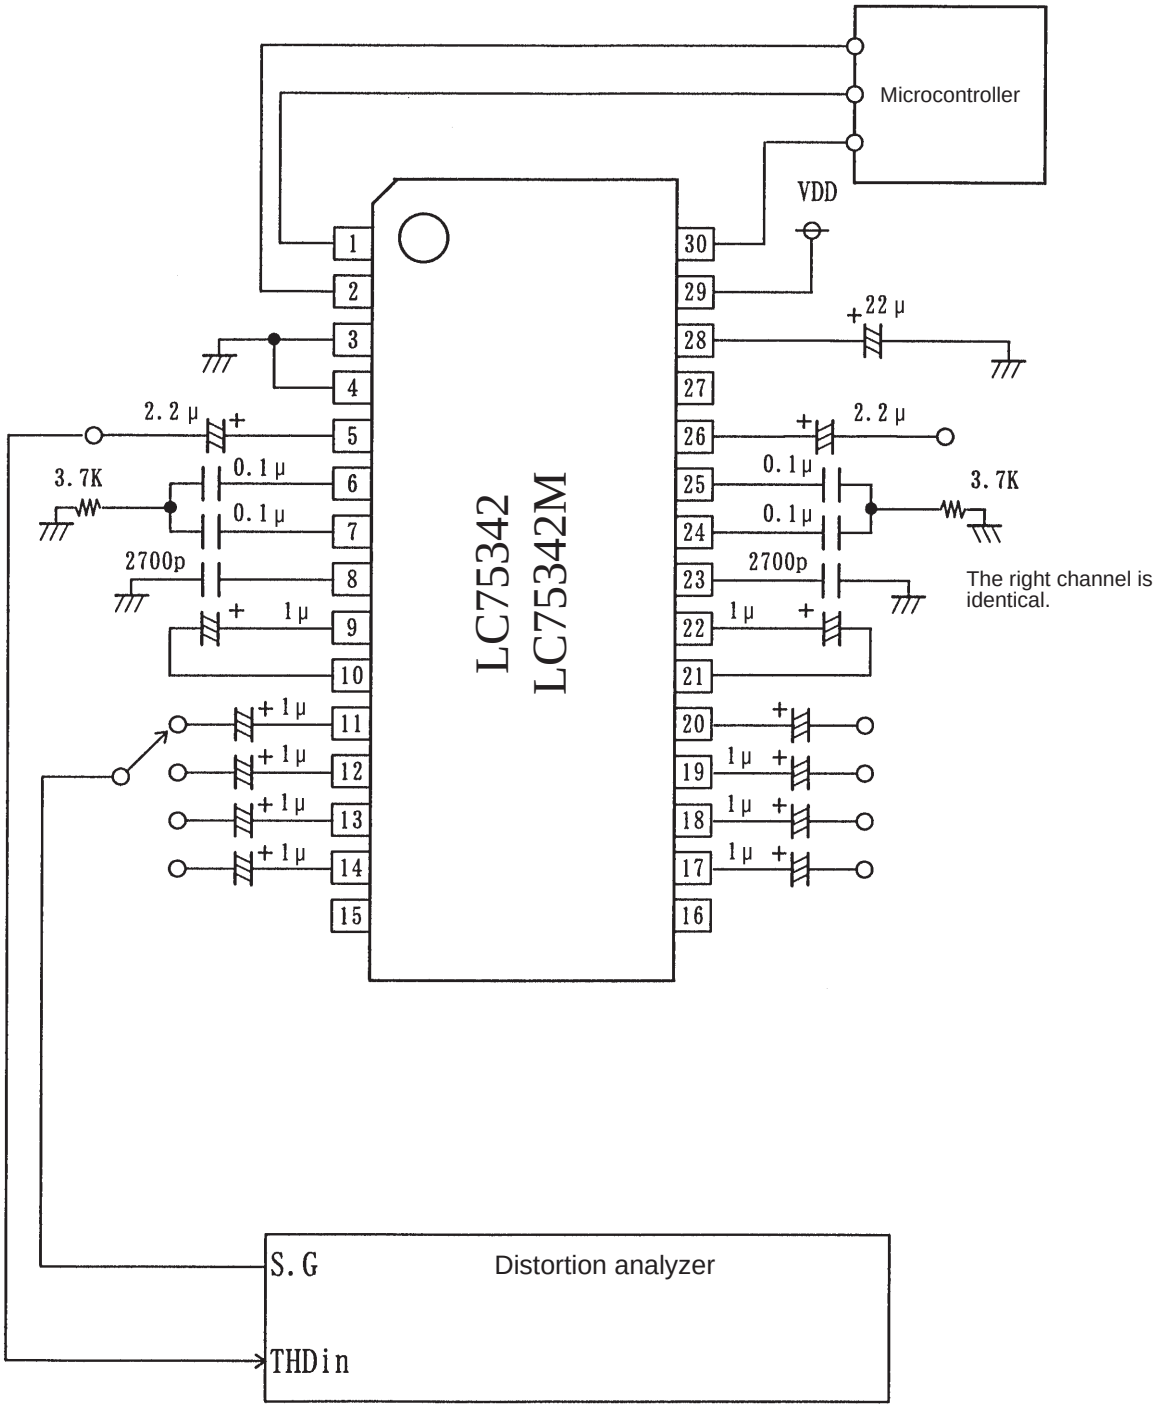


Units (resistance: Ω, capacitnace: F)

• Output noise voltage

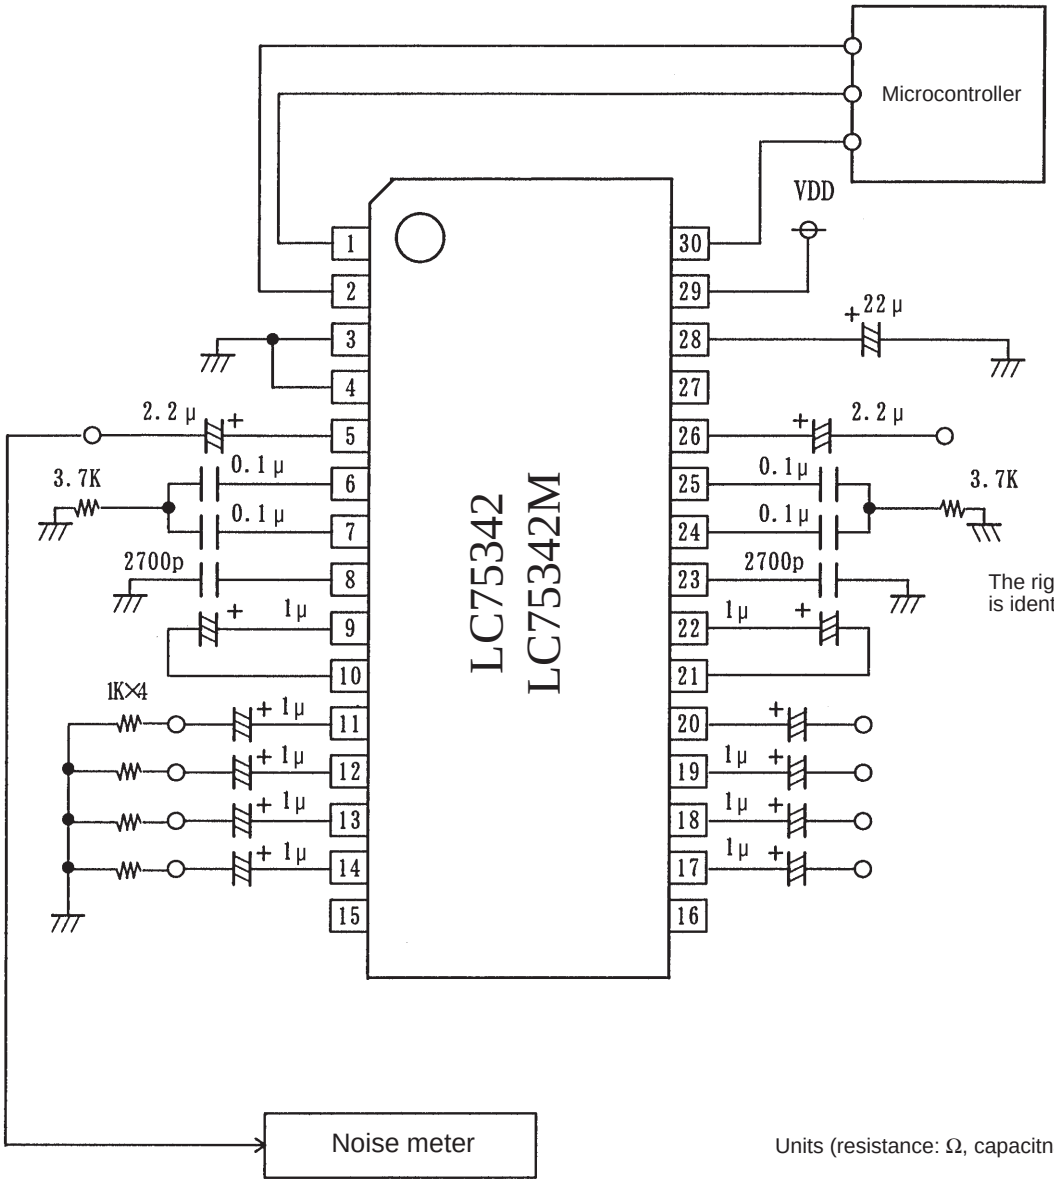

Units (resistance: Ω, capacitnace: F)

• Crosstalk

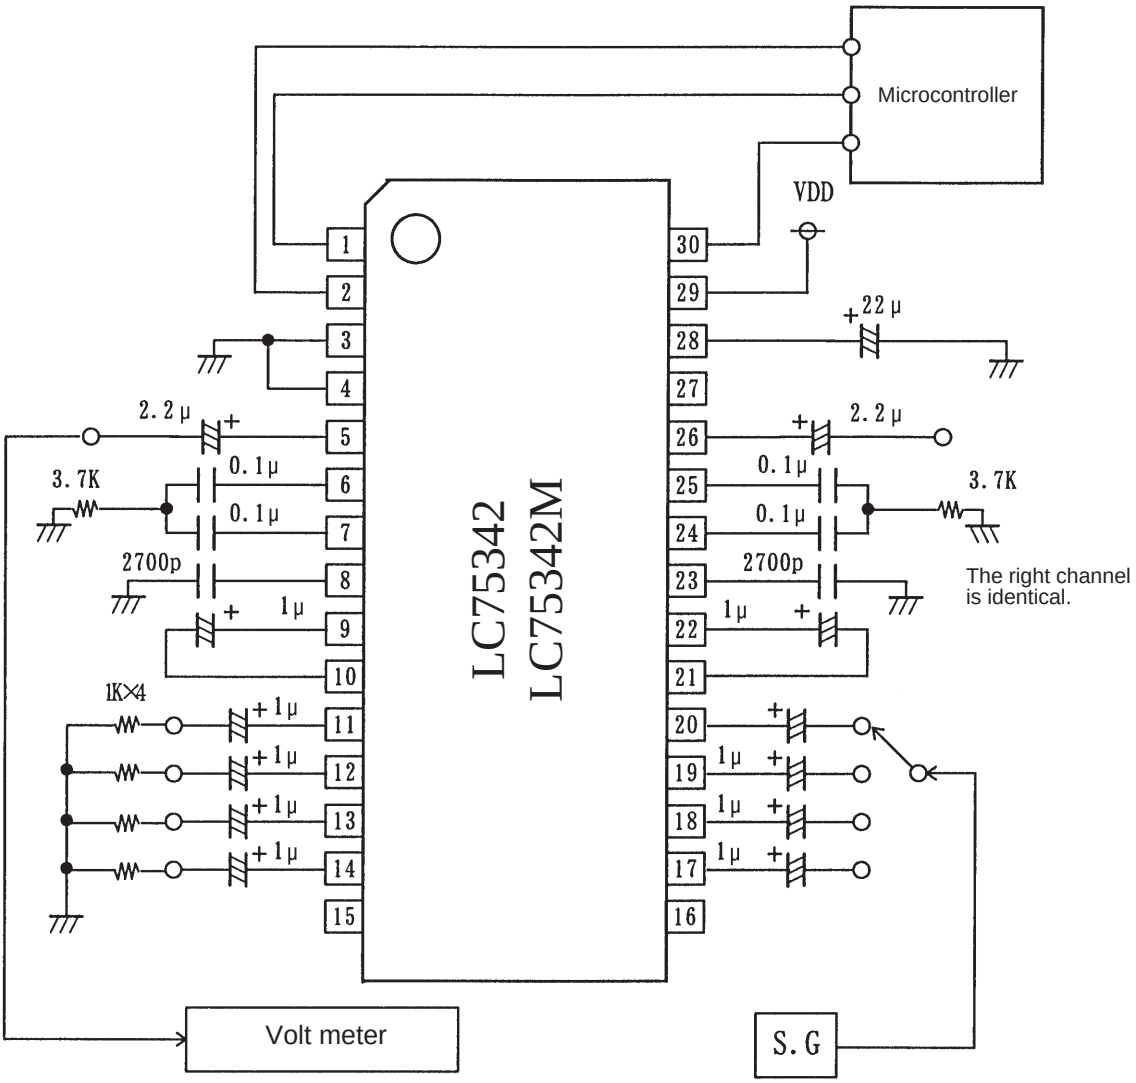


Units (resistance: Ω, capacitnace: F)

Bass Band Circuit

This section presents the equivalent circuit and the calculations for the external capacitors and resistors used to achieve a center frequency of 100 Hz.

- Bass band equivalent circuit

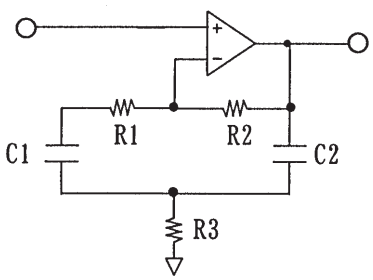

- Sample calculation

  Specifications Center frequency: f0 = 100 Hz
  Gain at maximum boost: G = 20 dB
  Let R1 = 0, R2 = 66.6 KΩ, and C1 = C2 = C.

(1) Determine R2 from the fact that G = 20 dB.

$$G_{+20\text{dB}} = 20 \times LOG_{10}\left(1 + \frac{R2}{2R3}\right)$$

$$R3 = \frac{R2}{2\,(10^{G+20\text{dB}/20} - 1)} = \frac{66000}{2 \times (10 - 1)} \neq 3.7\ k\Omega$$

(2) Determine C from the fact that the center frequency f0 = 100 Hz.


$$f0 = \frac{1}{2\pi\sqrt{R3R2C1C2}}$$

$$C = \frac{1}{2\pi f0\sqrt{R3R2}} = \frac{1}{2\pi \times 100\sqrt{66000 \times 3700}} \neq 0.1\ \mu F$$


(3) Determine Q.

$$Q = \frac{R3R2}{2R3} \cdot \frac{1}{\sqrt{R3R2}} \neq 2.1$$


Volume Control Step Characteristics

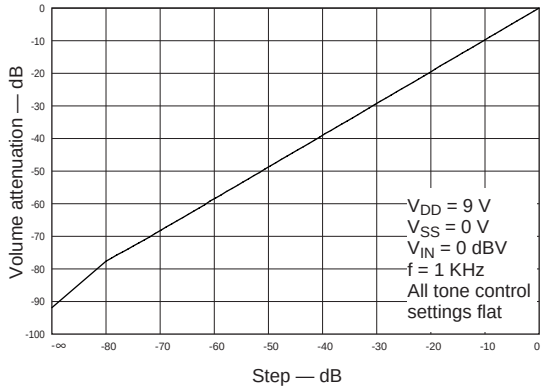


Bass Control Frequency Characteristics

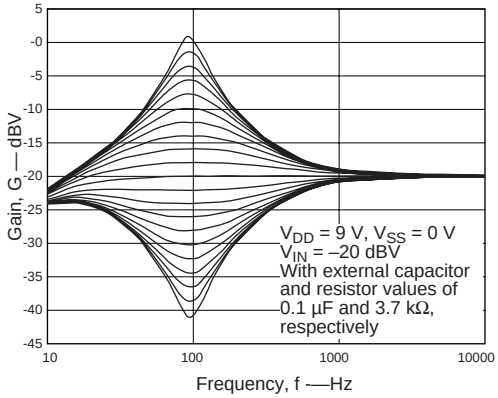


Treble Control Frequency Characteristics

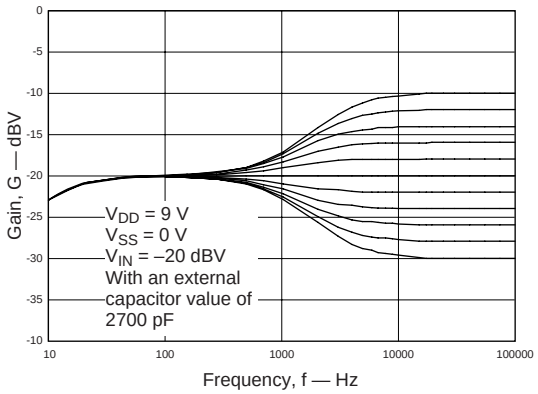


THD - Frequency Characteristics (1)

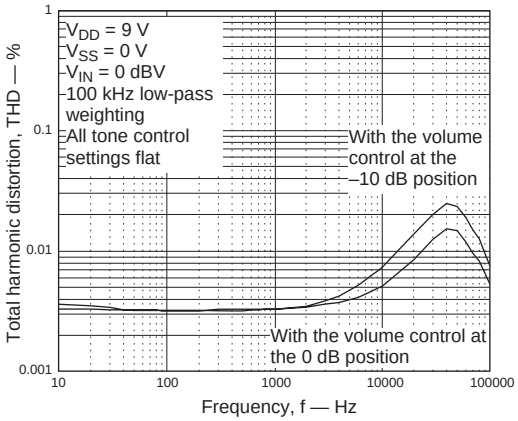


THD - Frequency Characteristics (2)

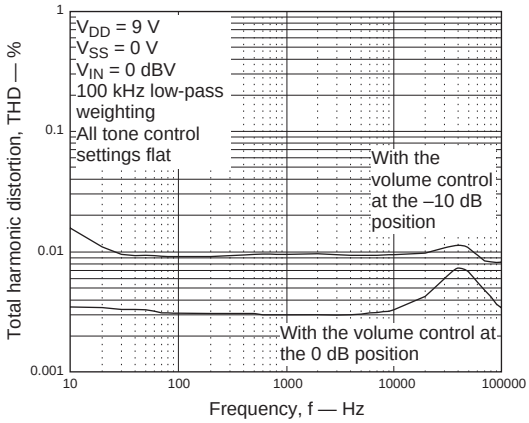


THD - Supply Voltage Characteristics (1)

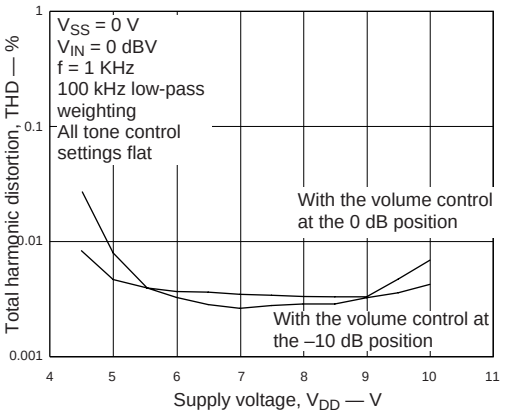


THD - Supply Voltage Characteristics (2)

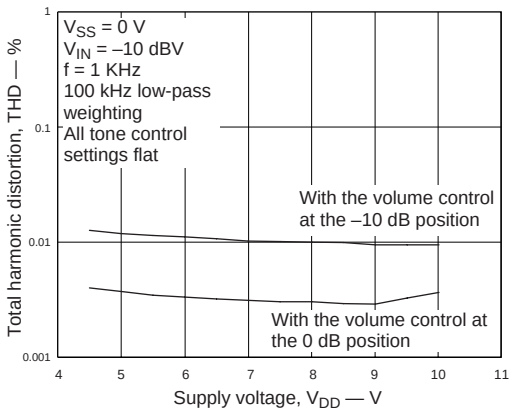

THD - Input Level Characteristics (1)

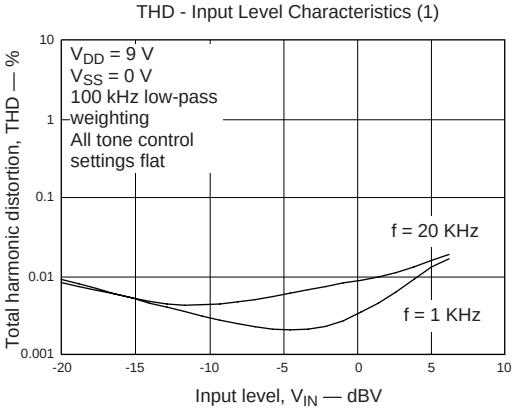

THD - Input Level Characteristics (2)

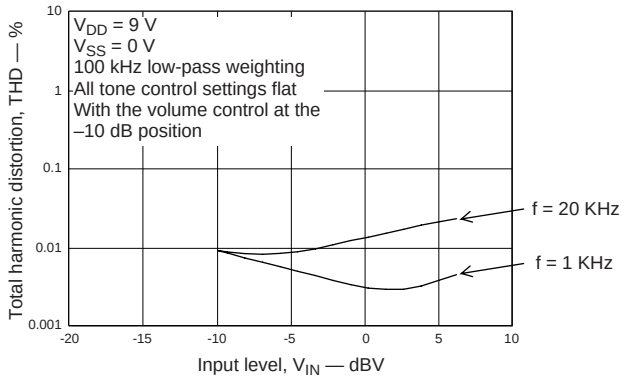

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of December, 1999. Specifications and information herein are subject to change without notice.