




Material:

- Conductor: 24AWG 7*0.19±0.015mm
- Conductor Insulation color coding: (1) White/Orange, (1) Orange, (1) White/Green, (1) Green, (1) Blue, (1) White/Blue, (1) White/Brown, (1) Brown
- Cable jacket printing: DIGITUS Cat6 U-UTP PATCH CORD ISO/IEC 11801 & TIA/EIA 568-B.2-1 24AWGx4p CM(UL) C(UL)
- Wiring T568B Color
- P1 & P2 Contact plug: RJ45 8P8C 3μ pc UL 94V-2
- Cable tie: White
- Cable jacket color: Black, White, Blue, or Grey
- Dielectric strength: 2.5KV dc-2seconds
- Working temperatures: -20°C ~ +60°C

| PIN OUT | | |
|---------|--------------|----|
| P1 | WIRE COLOR | P2 |
| 1 | ORANGE/WHITE | 1 |
| 2 | ORANGE | 2 |
| 3 | GREEN/WHITE | 3 |
| 6 | GREEN | 6 |
| 4 | BLUE | 4 |
| 5 | BLUE/WHITE | 5 |
| 7 | BROWN/WHITE | 7 |
| 8 | BROWN | 8 |

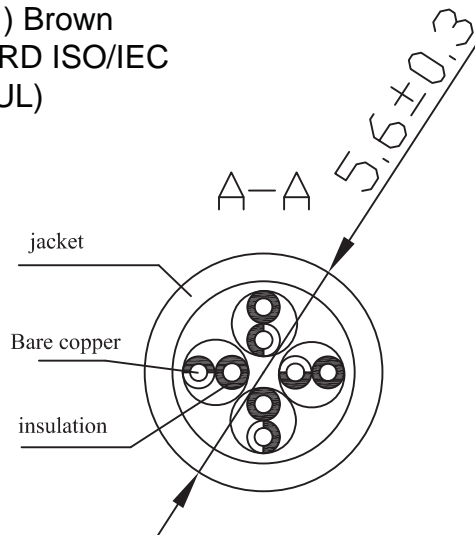

Unit: mm

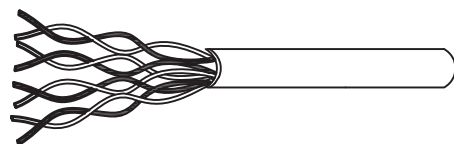

Order Code: DK-1611-xxx/x
 Order lengths in feet: 1,3,5,7,10,15, 20,25,50,100
 Cable Jacket colors: Black(BL), White(WH), Blue(B), Green(GR), or Grey(G)

| Scale | Free | | | | | Date | Name | Title | |
|-----------|------|-----|--------------|----------|--------|--|----------|--------|---|
| TOLERANCE | | | | | | Drawn | 25.04.13 | Wilson | Cat6 UTP Patch cable Unshielded/Booted, 24AWG, 3μ" |
| X. | ±0.3 | | | | | Approved | 28.04.13 | Groll | ASSMANN WSW-No. |
| X.X | ±X | | | | | | | | DK-1611-xxx/x |
| X.XX | ±X | | | | | | | | Drawing-No. |
| DIM | TOL | | | | | | | | rev00 |
| X.° | ±X° | ⓐ | Drawn | 25.04.13 | Wilson | | | | |
| X.X° | ±X° | ⓑ | | | | | | | Sheet |
| Angle | TOL | Id. | Modification | Date | Name | 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us | | | 1/1 |