Features

- ✧ For IF SAW filter
- ✧ Single-ended operation
- ✧ Ceramic Surface Mount Package
- ✧ Small size
- ✧ RoHS compliant (2002/95/EC), Pb-free


Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	-	374	-
Insertion Loss	dB	-	15	18
1 dB Bandwidth	MHz	4.45	4.51	-
3 dB Bandwidth	MHz	-	5.49	-
20 dB Bandwidth	MHz	-	7.05	7.5
40 dB Bandwidth	MHz	-	8.35	9
Passband Variation	dB	-	0.6	1
Absolute Delay	usec	-	1.6	-
Ultimate Rejection	dB	-	43	-
Material Temperature coefficient	KHz/°C	-6.7		
Substrate Material	-	112LT		
Ambient Temperature	°C	25		
DC Voltage	V	0		
Input Power	dBm	-	-	10
ESD Class	-	1A		
Package Size	SMD13.3*6.5			

Notes:

1. All specifications are based on the test circuit shown;
2. In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
4. This is the optimum impedance in order to achieve the performance show.


Matching Configuration

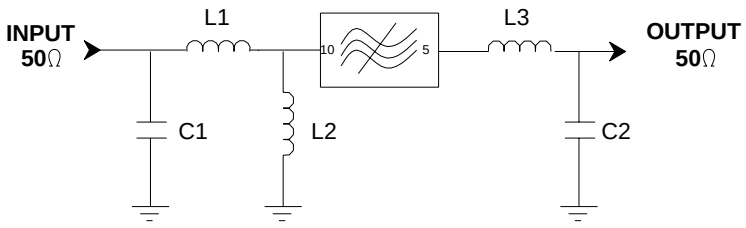

L1=L3=15nH L2=27nH
C1=8.2pF C2=22pF
Source/Load Impedance=50 ohm

Notes - Component values may change depending on board layout.

Package Dimension

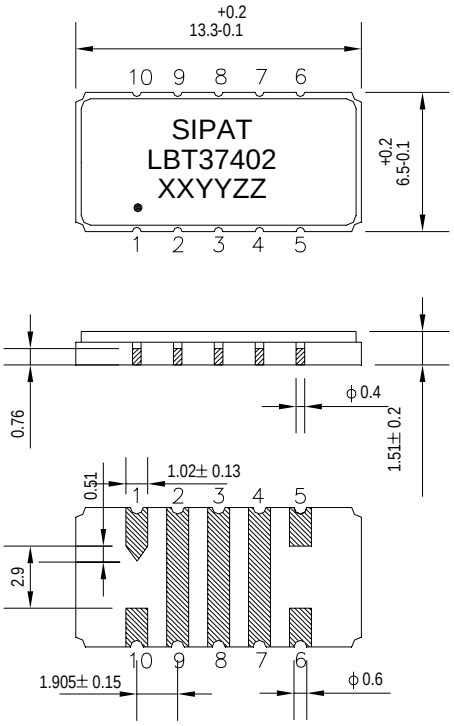


Pad Configuration:
Input: 10
Output: 5
Ground: 1,2,3,4,6,7,8,9

Marking Configuration:
1) •: Pad Number 1 Index
2) SIPAT: Manufacturer Name
3) LBT37402: Part Number
4) XXYY: Date(Year/month)
5) ZZ: Identified Code

Package: SMD13.3*6.5 **Unit: mm**


Typical Performance

Frequency Response

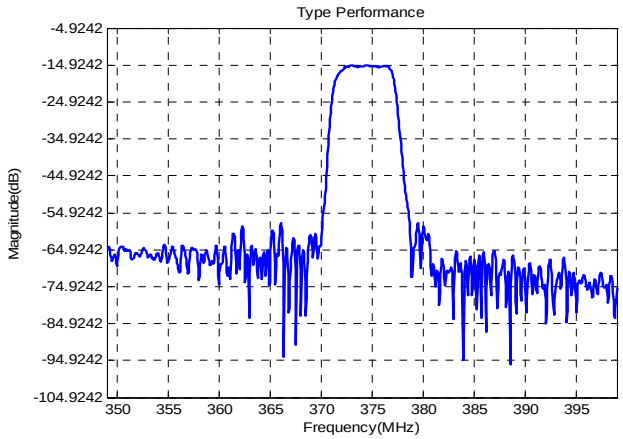


Horizontal: 5MHz/Div Vertical: 10dB/Div

Passband Response

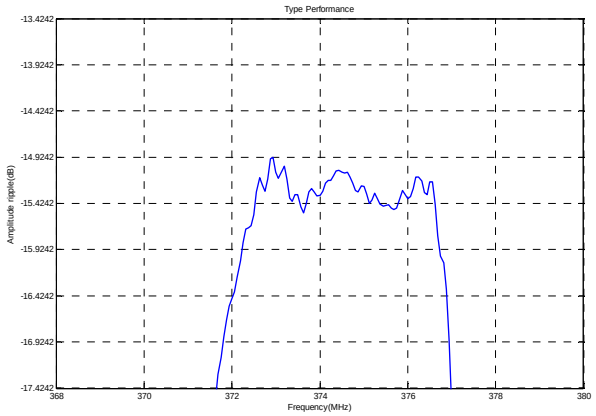


Horizontal: 2MHz/Div Vertical: 0.5dB/Div

Group Delay Variation(f0±2MHz)

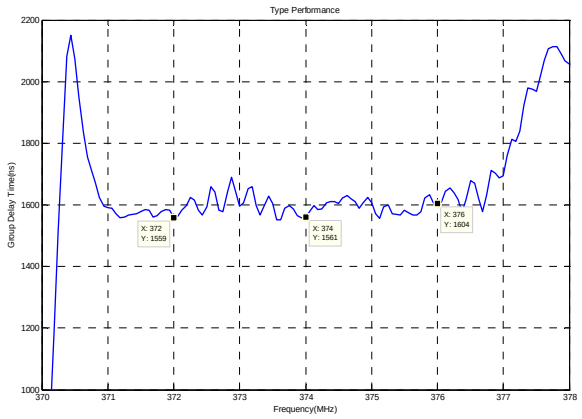


Horizontal: 1MHz/Div Vertical: 200ns/Div

Phase Linearity(f0±2MHz)

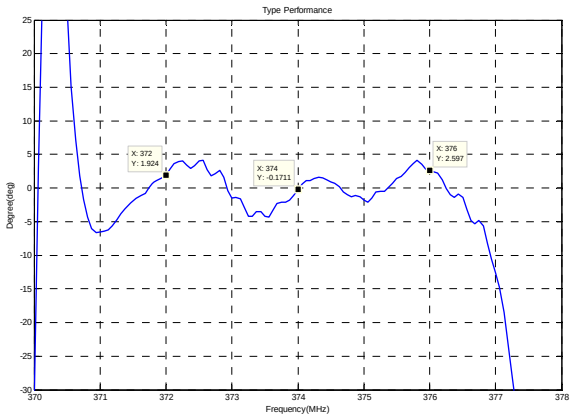

Horizontal: 1MHz/Div Vertical: 5deg/Div

Smith Chart S11

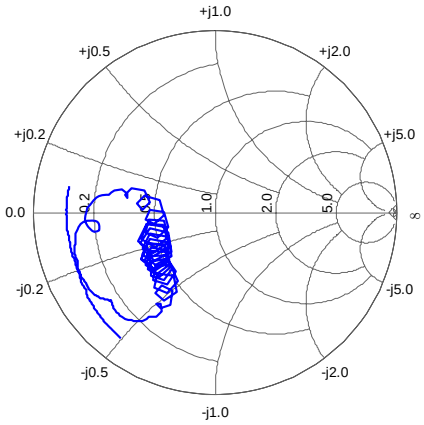

Smith Chart S22

