

Miniature Fuse, 6.3 x 32 mm, Quick-Acting F, 10 A, 125 VAC, 125 VDC



125 VAC · 125 VDC · Quick-Acting F



NNO

**Description**

- Low Breaking Capacity
- Type D8M 125V (0.16 - 6.3 A), A12M 125V (10 A)

**References**

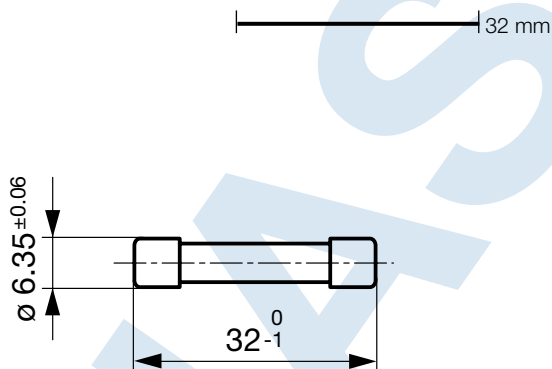
General Product Information

**Weblinks**

Approvals, RoHS, CHINA-RoHS, e-Store, Distributor-Stock-Check, Accessories, Product Change Notification (PCN)

**Technical Data**

Rated Voltage	125 VAC, 125 VDC	Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Rated Current	10 A	Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Breaking Capacity	5 kA	Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Characteristic	Quick-Acting F	Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Mounting	Fuseholder / Clip		
Admissible Ambient Air Temp.	-40 °C to 70 °C		
Climatic Category	40/070/21 acc. to IEC 60068-1		
Material: Tube	Ceramic		
Unit Weight	3.2 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking	Current, Voltage		

**Dimensions****Pre-Arcing Time**

Rated Current In	1.2 x In min.	1.65 x In max.	3.0 x In max.
10 A	60 min	60 min	400 ms

**Variants**

Rated Current [A]	Rated Voltage [VAC]	Rated Voltage [VDC]	Breaking Capacity	Voltage Drop 1.0 In typ. [mV]	Order Number
10	125	125	1)	200 ●	7023.1710

1) 5 kA @ 125 VAC, p.f. = 0.3 - 0.4 / 5 kA @ 125 VDC

**Packaging Unit**    Small Box Pack (10 pcs.)

### Time-Current-Curves

