
70 MHz Bandpass SAW Filter

9.5 MHz Bandwidth


BP60200

Specifications					
Parameter	Sym	Minimum	Typical	Maximum	Unit
Center Frequency at 25°C	fc	69.88	70	70.12	MHz
Insertion Loss at fc	IL	-	24.8	26.0	dB
1 dB Bandwidth	BW_1	9.1	9.3	-	MHz
3 dB Bandwidth	BW_3	9.5	9.8	-	MHz
40dB Bandwidth	BW_{40}	-	11.8	12.3	MHz
Passband Variation	-	-	0.3	0.8	dB
Phase Linearity	-	-	2.0	4.0	Deg
Group Delay Variation	-	-	30	60	nsec
Absolute Delay	-	-	2.0	-	μsec
Ultimate Rejection	-	50	60	-	dB
Substrate Material	-	-	YZ-$LiNbO_3$	-	-
Ambient Temperature	Ta	-	25	-	°C
Operating Temperature Range	To	-55	25	85	°C


Typical Performance

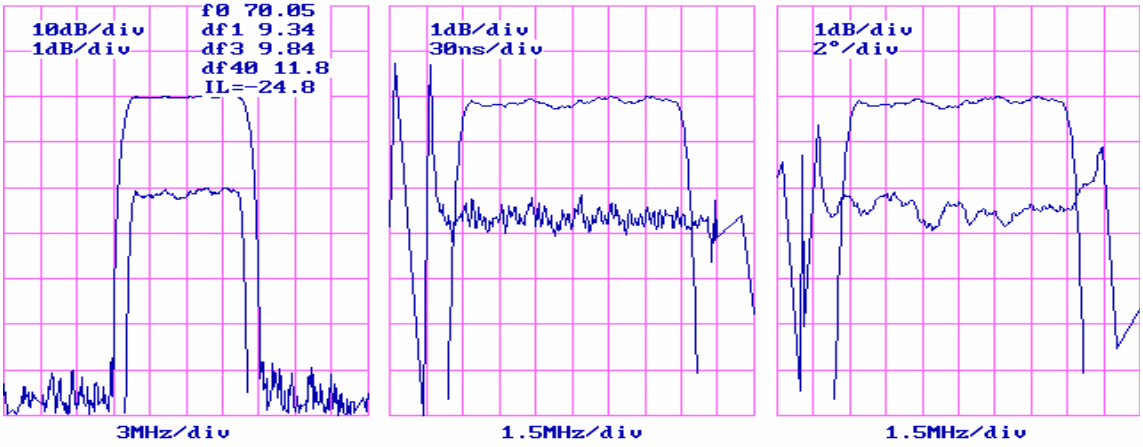

Package Outline

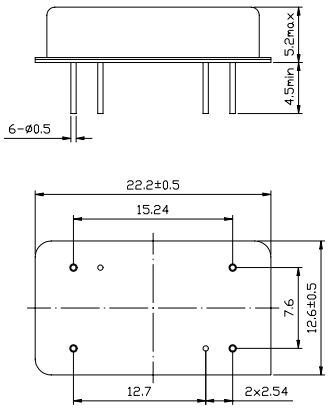

Matching Configuration

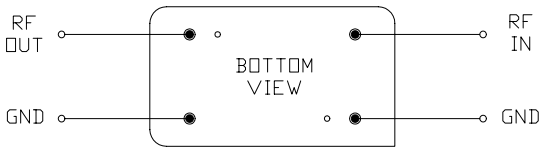

No Matching Required

Nominal Source/Load Impedance : 50 Ω

Phone: +86 (10) 5128 1211 Fax: +86 (10) 5820 3915 Email: sales@vanlong.com Web: http://www.vanlong.com