


### Ultra High Precision Z-Foil Resistor with TCR of $\pm 0.05 \text{ ppm}/^\circ\text{C}$ , PCR of $5 \text{ ppm}$ at Rated Power, Tolerance of $\pm 0.005 \%$ and Load Life Stability of $\pm 0.005 \%$

#### INDUSTRY BREAKTHROUGH



Any value at any tolerance available within resistance range

#### INTRODUCTION

The Z201 (0.150" lead spacing) and Z201L (0.200" lead spacing) Bulk Metal® Z-Foil resistors represent an industry breakthrough. This is the 3rd in a series of ultra-precision resistors since the first Bulk Metal® Foil resistor was introduced by Vishay in 1962. Each represents an improvement on the earlier model. The TCR slope of the Z201 is  $0.2 \text{ ppm}/^\circ\text{C}$  (-55 °C to +125 °C, +25 °C Ref.) and is an order of magnitude better than the original S102C. The Bulk Metal® Z-Foil resistor is the ultimate choice in the most demanding analog applications.

The Z-Foil technology provides a significant reduction of the resistive component's sensitivity to ambient temperature variations (TCR) and applied power changes (PCR). Designers can now guarantee a high degree of stability and accuracy in fixed-resistor applications using solutions based on Vishay's revolutionary Z-Foil technology.

Our Application Engineering Department is available to advise and to make recommendations. For non-standard technical requirements and special applications, please contact us.

**TABLE 1 - TOLERANCE AND TCR VERSUS**

| VALUE                          | STANDARD TOLERANCE | TYPICAL TCR AND MAXIMUM SPREAD<br>-55 °C TO +125 °C<br>(+25 °C REF.) |
|--------------------------------|--------------------|----------------------------------------------------------------------|
| 100 $\Omega$ to 100 k $\Omega$ | $\pm 0.005 \%$     | $\pm 0.2 \pm 0.6 \text{ ppm}/^\circ\text{C}$                         |
| 80 $\Omega$ to < 100 $\Omega$  | $\pm 0.005 \%$     | $\pm 0.2 \pm 0.8 \text{ ppm}/^\circ\text{C}$                         |
| 50 $\Omega$ to < 80 $\Omega$   | $\pm 0.01 \%$      | $\pm 0.2 \pm 1.0 \text{ ppm}/^\circ\text{C}$                         |
| 25 $\Omega$ to < 50 $\Omega$   | $\pm 0.01 \%$      | $\pm 0.2 \pm 1.3 \text{ ppm}/^\circ\text{C}$                         |
| 10 $\Omega$ to < 25 $\Omega$   | $\pm 0.02 \%$      | $\pm 0.2 \pm 1.6 \text{ ppm}/^\circ\text{C}$                         |

\* Pb containing terminations are RoHS compliant, exemptions may apply

#### FEATURES

- Temperature Coefficient of Resistance (TCR):  
 $\pm 0.05 \text{ ppm}/^\circ\text{C}$  typical (0 °C to +60 °C)  
 $\pm 0.2 \text{ ppm}/^\circ\text{C}$  typical (-55 °C to +125 °C, +25 °C Ref.)
- Power Coefficient of Resistance "ΔR due to self heating":  $\pm 5 \text{ ppm}$  at Rated Power
- Rated Power: 0.6 W at 70 °C  
0.3 W at 125 °C
- Resistance Tolerance: to  $\pm 0.005 \%$
- Load Life Stability: to  $\pm 0.005 \%$  at 70 °C, 2000 hours at Rated Power
- Resistance Range: 10  $\Omega$  to 100 k $\Omega$  (higher or lower Values of Resistance available)
- Electrostatic Discharge (ESD) above 25 000 Volts
- Non Inductive, Non Capacitive Design
- Rise Time: 1.0 ns without ringing
- Current Noise: 0.01: -40 dB
- Thermal EMF: 0.1  $\mu\text{V}/^\circ\text{C}$  Max.  
0.05  $\mu\text{V}/^\circ\text{C}$  typical
- Voltage Coefficient: < 0.1 ppm/V
- Non Inductive: 0.08  $\mu\text{H}$
- Terminal Finishes available: Lead (Pb)-free  
Tin/Lead Alloy
- Maximum Working Voltage: 300 V
- Drop in Replacement for S102C/K
- Matched sets are available per request
- For better performances please contact us




**RoHS\***  
COMPLIANT

#### APPLICATIONS


- Precision Amplifiers, High Precision Instrumentation, Medical and Automatic Test Equipment
- Laboratory, Audio (High End Stereo Equipment)
- EB Applications, Military, Airborne and Space
- Down-hole (High Temperature)

**FIGURE 1 - POWER DERATING CURVE**

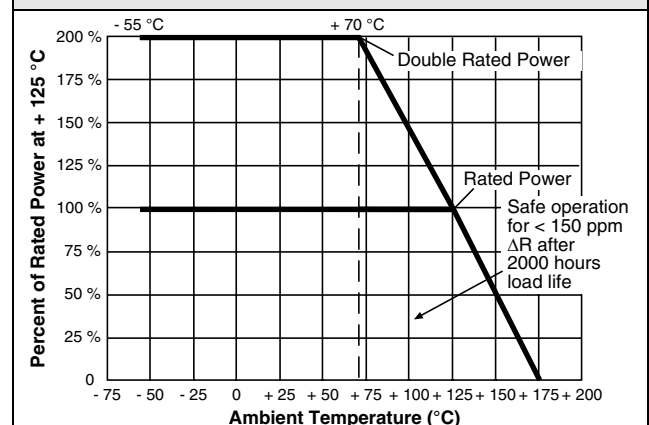


**FIGURE 2 - TRIMMING TO VALUES**


(Conceptual Illustration)

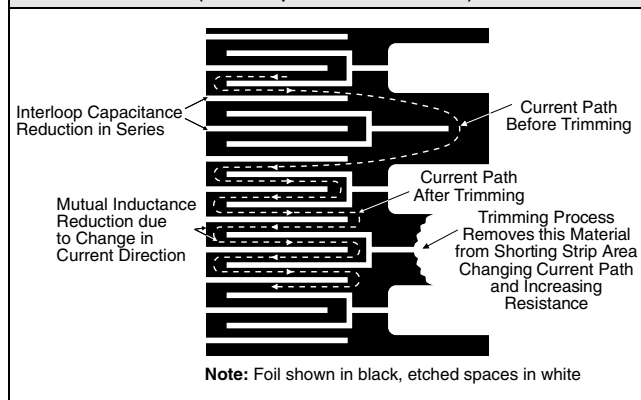

**FIGURE 3 - TYPICAL TCR CURVE Z-FOIL**

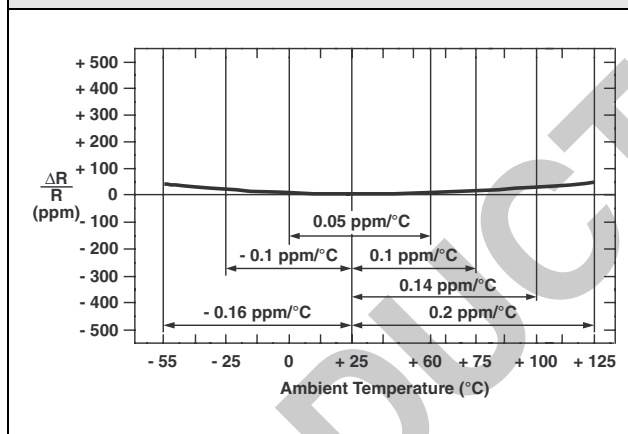

**FIGURE 4 - STANDARD IMPRINTING AND DIMENSIONS**

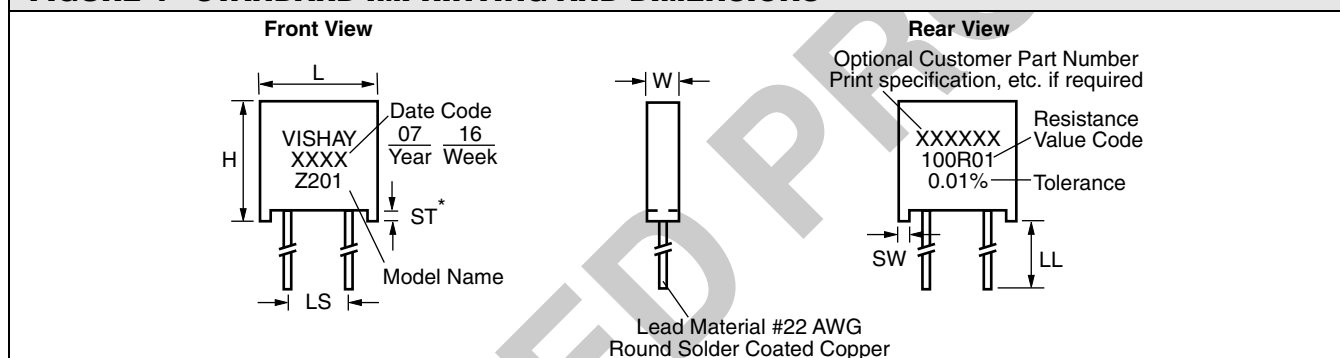

\* The standoffs shall be so located as to give a lead clearance of 0.010" minimum between the resistor body and the printed circuit board when the standoffs are seated on the printed circuit board. This is to allow for proper cleaning of flux and other contaminants from the unit after all soldering processes.

|         |        | LS            | W             | L             | H             | ST        | SW           | LL            |
|---------|--------|---------------|---------------|---------------|---------------|-----------|--------------|---------------|
| Z 201   | Inches | 0.150 ± 0.005 |               |               |               |           |              |               |
|         | mm     | 3.81 ± 0.13   | 0.105 ± 0.010 | 0.300 ± 0.010 | 0.326 ± 0.010 | 0.010 min | 0.035 ± 0.01 | 1.000 ± 0.125 |
| Z 201 L | Inches | 0.200 ± 0.005 | 2.67 ± 0.25   | 7.62 ± 0.25   | 8.28 ± 0.25   | 0.254 min | 1.02 ± 0.13  | 25.4 ± 3.18   |
|         | mm     | 5.08 ± 0.13   |               |               |               |           |              |               |

**TABLE 2 - Z201 SPECIFICATIONS**

| Stability                 |                                                                                                   |
|---------------------------|---------------------------------------------------------------------------------------------------|
| Load Life at 2000 hours   | $\pm 0.005 \%$ Max $\Delta R$ at 0.1 W/+ 70 °C<br>$\pm 0.015 \%$ Max $\Delta R$ at 0.3 W/+ 125 °C |
| Load Life at 10 000 hours | $\pm 0.01 \%$ Max $\Delta R$ at 0.05 W/+ 125 °C<br>$\pm 0.05 \%$ Max $\Delta R$ at 0.3 W/+ 125 °C |



Ultra High Precision Z-Foil Resistor with TCR of  
 $\pm 0.05 \text{ ppm/}^\circ\text{C}$ , PCR of 5 ppm at Rated Power, Tolerance  
of  $\pm 0.005 \%$  and Load Life Stability of  $\pm 0.005 \%$

**TABLE 3 - ENVIRONMENTAL PERFORMANCE COMPARISON**

|                                                                                                                                               | MIL-PRF-55182<br>CHAR J                                                               | VISHAY Z201                                                                                  |                                                                                                                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                               |                                                                                       | MAXIMUM $\Delta R$                                                                           | TYPICAL $\Delta R$                                                                                                                                                       |
| <b>Test Group I</b><br>Thermal Shock<br>Short Time Overload                                                                                   | $\pm 0.2 \%$<br>$\pm 0.2 \%$                                                          | $\pm 0.01 \%$ (100 ppm)<br>$\pm 0.01 \%$ (100 ppm)                                           | $\pm 0.002 \%$ (20 ppm)<br>$\pm 0.003 \%$ (30 ppm)                                                                                                                       |
| <b>Test Group II</b><br>Resistance Temperature<br>Characteristic<br>Low Temperature Storage<br>Low Temperature Operation<br>Terminal Strength | $\pm 25 \text{ ppm/}^\circ\text{C}$<br>$\pm 0.15 \%$<br>$\pm 0.15 \%$<br>$\pm 0.2 \%$ | see Table 1<br>$\pm 0.01 \%$ (100 ppm)<br>$\pm 0.01 \%$ (100 ppm)<br>$\pm 0.01 \%$ (100 ppm) | $\pm 0.05 \text{ ppm/}^\circ\text{C}$<br>(0 $^\circ\text{C}$ to + 60 $^\circ\text{C}$ )<br>$\pm 0.002 \%$ (20 ppm)<br>$\pm 0.002 \%$ (20 ppm)<br>$\pm 0.002 \%$ (20 ppm) |
| <b>Test Group III</b><br>DWV<br>Resistance to Solder Heat<br>Moisture Resistance                                                              | $\pm 0.15 \%$<br>$\pm 0.1 \%$<br>$\pm 0.4 \%$                                         | $\pm 0.01 \%$ (100 ppm)<br>$\pm 0.01 \%$ (100 ppm)<br>$\pm 0.05 \%$ (500 ppm)                | $\pm 0.002 \%$ (20 ppm)<br>$\pm 0.005 \%$ (50 ppm)<br>$\pm 0.01 \%$ (100 ppm)                                                                                            |
| <b>Test Group IV</b><br>Shock<br>Vibration                                                                                                    | $\pm 0.2 \%$<br>$\pm 0.2 \%$                                                          | $\pm 0.01 \%$ (100 ppm)<br>$\pm 0.01 \%$ (100 ppm)                                           | $\pm 0.002 \%$ (20 ppm)<br>$\pm 0.002 \%$ (20 ppm)                                                                                                                       |
| <b>Test Group V</b><br>Life Test at 0.3 W/+ 125 $^\circ\text{C}$<br>2000 hours<br>10 000 hours                                                | $\pm 0.5 \%$<br>$\pm 2.0 \%$                                                          | $\pm 0.015 \%$ (150 ppm)<br>$\pm 0.05 \%$ (500 ppm)                                          | $\pm 0.01 \%$ (100 ppm)<br>$\pm 0.03 \%$ (300 ppm)                                                                                                                       |
| <b>Test Group Va</b><br>Life Test at 0.6 W (2 x Rated Power)/+ 70 $^\circ\text{C}$ , 2000 hours                                               | $\pm 0.5 \%$                                                                          | $\pm 0.015 \%$ (150 ppm)                                                                     | $\pm 0.01 \%$ (100 ppm)                                                                                                                                                  |
| <b>Test Group VI</b><br>High Temperature Exposure                                                                                             | $\pm 2.0 \%$                                                                          | $\pm 0.1 \%$ (1000 ppm)                                                                      | $\pm 0.05 \%$ (500 ppm)                                                                                                                                                  |
| <b>Test Group VII</b><br>Voltage Coefficient                                                                                                  | 0.005 %/V                                                                             | < 0.00001 %/V                                                                                | < 0.00001 %/V                                                                                                                                                            |

**STANDARD MEASUREMENT** (at room temperature)**Standard Test Conditions:**

- Temperature: + 23  $^\circ\text{C} \pm 2 \text{ }^\circ\text{C}$
- Relative humidity: 35 to 65 % RH
- Lead test point: 0.5" (12.7 mm) from resistor body

**IMPROVED PERFORMANCE TESTING**


The preceding information is based on product directly off the production line. Improved performance (meaning increased time stability with load and other stresses) is available through factory conducted "Improved Performance Testing". The test routine is usually tailored to the user's stability objectives. A screened product can be brought down to a potential load life drift of less than 50 ppm.

For example, the data sheet "7 Technical Reasons to Specify BMF Resistive Components" shows the drift characteristics of a standard product.

Various screen test routines are available and all anticipated stresses must be taken into account before settling on one specific test routine. Our Applications Engineering Department is available to discuss and recommend appropriate routines given the full spectrum of anticipated stresses and stability requirements.

**TABLE 4 - GLOBAL PART NUMBER INFORMATION**

NEW GLOBAL PART NUMBER: Y1453250R000V9L (preferred part number format)

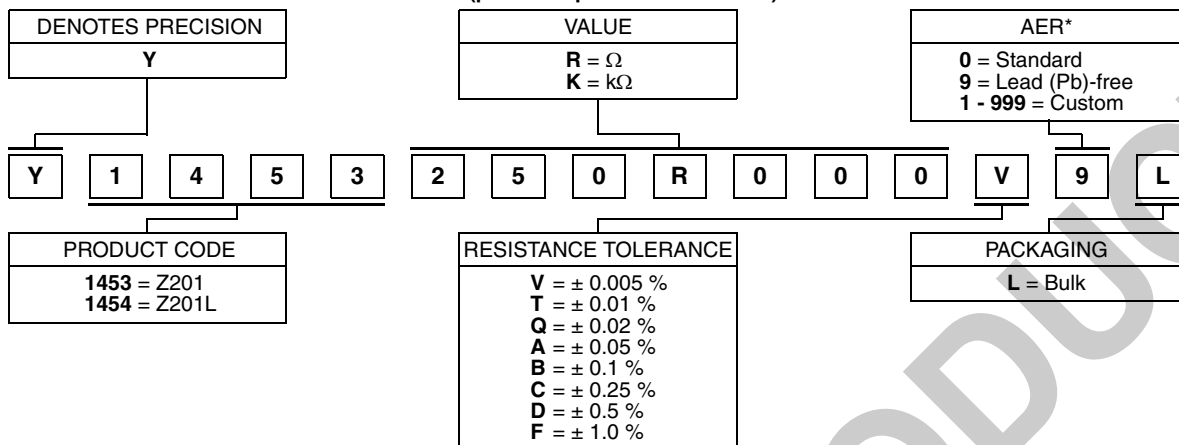

FOR EXAMPLE: ABOVE GLOBAL ORDER Y1453 250R000 V 9 L:


TYPE: Z201

VALUE:  $250.0 \Omega$ ABSOLUTE TOLERANCE:  $\pm 0.005 \%$ 

TERMINATION: Lead (Pb)-free

PACKAGING: Bulk

HISTORICAL PART NUMBER: Z201T 250R00 V B (will continue to be used)

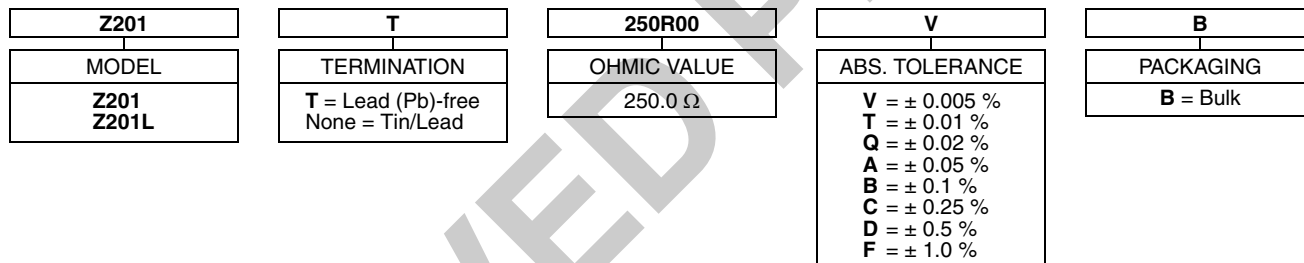**Note**

\* For non-standard requests, please contact Application Engineering.



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.