



827LMH200MZCE

SNAP-IN/ SNAP MOUNT

Parts are RoHS compliant

Date code when parts became RoHS: 27

APPLICATIONS: Filtering, switching power supplies

ELECTRICAL SPECIFICATIONS

Capacitance: 820 μ F

Dissipation Factor: 0.15 Max at 120 Hz and 20°C

Temperature Range: -25°C to +105°C

Impedance: N/A

Tolerance: -20 %, +20 %

WVDC: 200 Volts DC

SVDC: 250 Volts DC

Ripple Current: 2.04 A at 120 Hz and 105°C

Impedance Ratios: -25°C/20°C 8 and - - -

Leakage Current: $3\sqrt{CV}$

1215 μ A after 5 Minutes

Load Life: 2000 hours at 105°C with 100 % of rated voltage and with 100 % of rated ripple current

Capacitance Change: $\leq 20\%$ of initial measured value

Dissipation Factor: $\leq 200\%$ of maximum specified value

Leakage Current: $\leq 100\%$ of maximum specified value

Frequency Multipliers:

50 HZ	120 HZ	400 HZ	1 KHZ	10 KHZ	100 KHZ
0.8	1	1	1.25	1.47	1.47

Temperature Multipliers:

45°C	60°C	70°C	65°C	75°C	85°C	105°C	125°C
2	1.9	1.7	1.8	1.4	1.4	1	0

PHYSICAL DIMENSIONS

Diameter (D): 25 mm + 1 mm

Length (L): 35 mm + 2 mm


Lead Spacing (S): 10 mm +/- 0.1 mm

Coating: GreenPET sleeving

Lead Wire Diameter (d): 1.5 mm +/- 0.5 mm

Lead Length: 4 mm +/- 1 mm

Lead Finish: Matte Tin

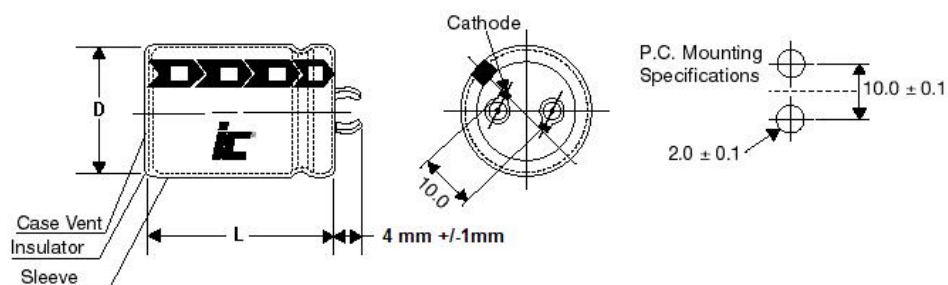

3757 W. Touhy Ave. Lincolnwood, IL 60712 (847) 675-1760 FAX (847) 673-2850
Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, www.ilcap.com.hk
© Copyright 2019 Illinois Capacitor. An affiliate of Cornell Dubilier, All Rights Reserved