TGM-20-2001


Module Amplifier 2 GHz - 20 GHz

This Module Amplifier offers exceptional performance over the band 2 GHz to 20 GHz with 22 dBm P1dB output power and 8 dB Gain.

Teledyne Microwave amplifiers are balanced or feedback designs and manufactured with the latest MIC & MMIC technology. The GaAs FET's used in these amplifiers are well established proven devices from multiple sources.

Teledyne Microwave offers a complete line of Narrow and broadband Amplifiers covering the frequency range 500 MHz to 40 GHz. These products are available in either connectorized packages or as modules. For a complete list of these products and more, please visit our website.

Other products from Teledyne Microwave include: Transceivers, Synthesizers, and YIG Products

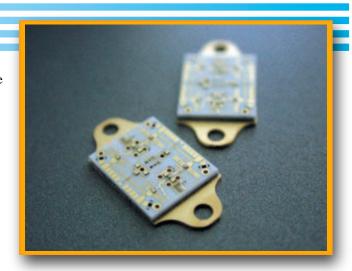

Specifications:

Model Number: TGM-20-2001 Frequency Range: 2 GHz - 20 GHz

Gain (min): 8 dB

Gain Vs Temp Coefficient per 1 deg C: -0.012 dB

Noise Figure (max): 8 dB

Output Power @ 1dB Compression: 22 dBm

Gain Flatness Vs Frequency: +/-1 dB 3rd Order Intercept (Typ): Contact Factory

Power Supply:

Input Voltage: 11.5 to 15 VDC Current @ 12 VDC (typ): 250 mA

Current @ 12 VDC (max): Contact Factory

Case Type (See attached Outline): 1248NP


Temperature Range: +25C



ISO 9001:2000

TGM-20-2001

Module Amplifier 2 GHz - 20 GHz

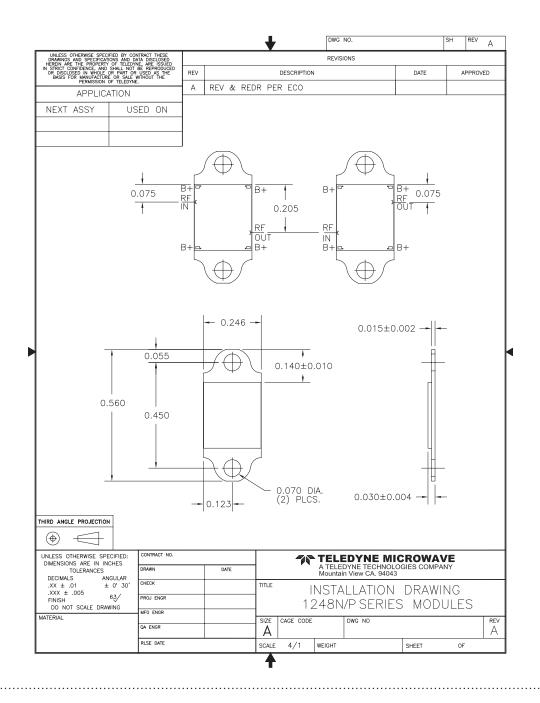



ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845 www.teledynemicrowave.com • microwave@teledyne.com