
ZXMN6A08G
60V SOT223 N-channel enhancement mode MOSFET

Summary

$V_{(BR)DSS}$	$R_{DS(on)}$ (Ω)	I_D (A)
60	0.080 @ V_{GS} = 10V	5.3
	0.150 @ V_{GS} = 4.5V	2.8




Description

This new generation trench MOSFET from Zetex features a unique structure combining the benefits of low on-resistance and fast switching, making it ideal for high efficiency power management applications.


Features

- Low on-resistance
- Fast switching speed
- Low threshold
- Low gate drive
- SOT223 package



Applications

- DC-DC converters
- Power management functions
- Disconnect switches
- Motor control



Pinout - top view

Ordering information

Device	Reel size (inches)	Tape width (mm)	Quantity per reel
ZXMN6A08GTA	7	12	1,000
ZXMN6A08GTC	13	12	4,000

Device marking

ZXMN
6A08

© Zetex Semiconductors plc 2006

Absolute maximum ratings

Parameter		Symbol	Limit	Unit
Drain-source voltage		V_{DSS}	60	V
Gate-source voltage		V_{GS}	± 20	V
Continuous drain current	@ V_{GS} = 10V; T_{amb} = 25°C(b)	I_D	5.3	A
	@ V_{GS} = 10V; T_{amb} = 70°C(b)		4.2	
	@ V_{GS} = 10V; T_{amb} = 25°C(a)		3.8	
Pulsed drain current(c)		I_{DM}	20	A
Continuous source current (body diode)(b)		I_S	2.1	A
Pulsed source current (body diode)(c)		I_{SM}	20	A
Power dissipation at T_{amb} = 25°C(a)		P_D	2	W
Linear derating factor			16	mW/°C
Power dissipation at T_{amb} = 25°C(b)		P_D	3.9	W
Linear derating factor			31	mW/°C
Operating and storage temperature range		T_j, T_{stg}	-55 to +150	°C

Thermal resistance

Parameter	Symbol	Limit	Unit
Junction to ambient(a)	$R_{\Theta JA}$	62.5	°C/W
Junction to ambient(b)	$R_{\Theta JA}$	32	°C/W

NOTES:


(a) For a device surface mounted on 25mm x 25mm FR4 PCB with high coverage of single sided 1oz copper, in still air conditions.

(b) For a device surface mounted on FR4 PCB measured at t ≤10 sec.


(c) Repetitive rating - 25mm x 25mm FR4 PCB, D=0.02, pulse width 300μs - pulse width limited by maximum junction temperature.

© Zetex Semiconductors plc 2006


Typical characteristics

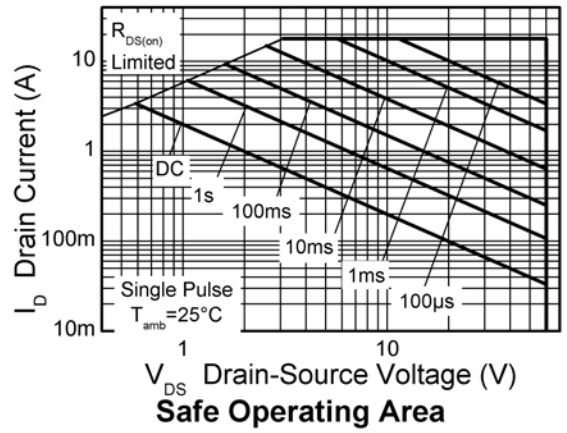


Safe Operating Area

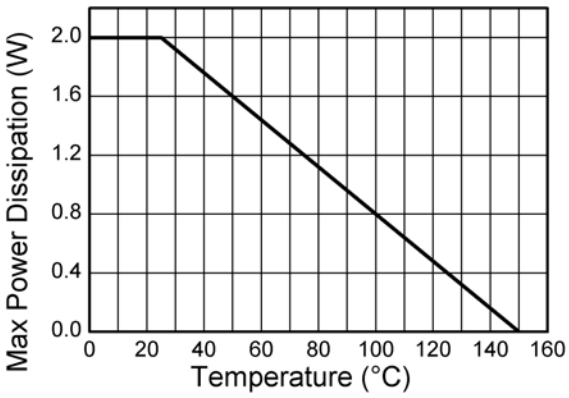

Derating Curve

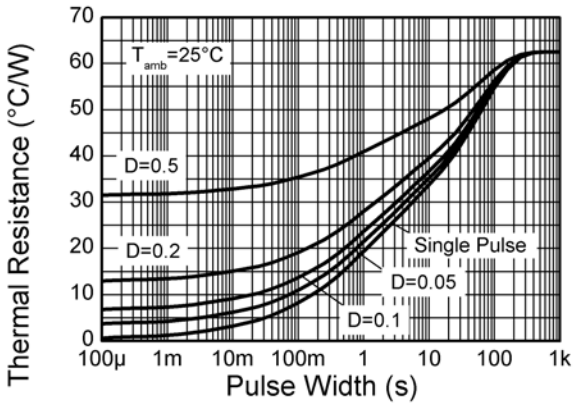

Transient Thermal Impedance

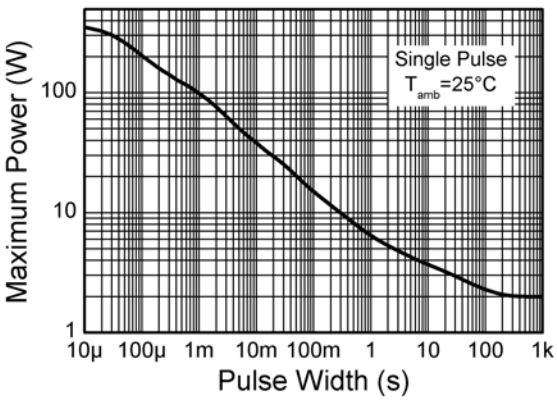

Pulse Power Dissipation

© Zetex Semiconductors plc 2006


Electrical characteristics (at T_{amb} = 25°C unless otherwise stated)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Static						
Drain-source breakdown voltage	$V_{(BR)DSS}$	60			V	I_D= 250μA, V_{GS}=0V
Zero gate voltage drain current	I_{DSS}			0.5	μA	V_{DS}= 60V, V_{GS}=0V
Gate-body leakage	I_{GSS}			100	nA	V_{GS}=±20V, V_{DS}=0V
Gate-source threshold voltage	$V_{GS(th)}$	1			V	I_D= 250μA, V_{DS}=V_{GS}
Static drain-source on-state resistance(*)	$R_{DS(on)}$			0.080	Ω	V_{GS}= 10V, I_D= 4.8A
				0.150	Ω	V_{GS}= 4.5V, I_D = 4.2A
Forward transconductance (*) (‡)	g_{fs}		6.6		S	V_{DS}= 15V, I_D= 4.8A
Dynamic(‡)						
Input capacitance	C_{iss}		459		pF	V_{DS}= 40V, V_{GS}=0V f=1MHz
Output capacitance	C_{oss}		44.2		pF	
Reverse transfer capacitance	C_{rss}		24.1		pF	
Switching (†) (‡)						
Turn-on delay time	$t_{d(on)}$		2.6		ns	V_{DD}= 30V, I_D= 1.5A R_G≅6.0Ω, V_{GS}= 10V
Rise time	t_r		2.1		ns	
Turn-off delay time	$t_{d(off)}$		12.3		ns	
Fall time	t_f		4.6		ns	
Gate charge	Q_g		4.0		nC	V_{DS}= 30V, V_{GS}= 5V I_D= 1.4A
Total gate charge	Q_g		5.8		nC	V_{DS}= 30V, V_{GS}= 10V I_D= 1.4A
Gate-source charge	Q_{gs}		1.4		nC	
Gate drain charge	Q_{gd}		1.9		nC	
Source-drain diode						
Diode forward voltage(*)	V_{SD}		0.88	1.2	V	T_j=25°C, I_S= 4A, V_{GS}=0V
Reverse recovery time(‡)	t_{rr}		19.2		ns	Tj=25°C, I_S= 1.4A, di/dt=100A/μs
Reverse recovery charge(‡)	Q_{rr}		30.3		nC	


NOTES:
(*) Measured under pulsed conditions. Pulse width ≤300μs; duty cycle ≤2%.
(†) Switching characteristics are independent of operating junction temperature.
(‡) For design aid only, not subject to production testing.

© Zetex Semiconductors plc 2006


Typical characteristics

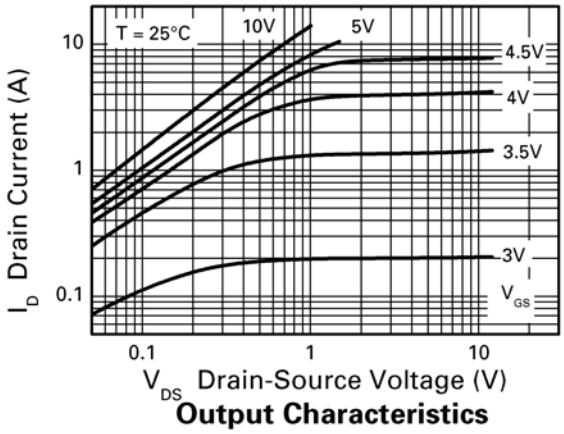


Output Characteristics

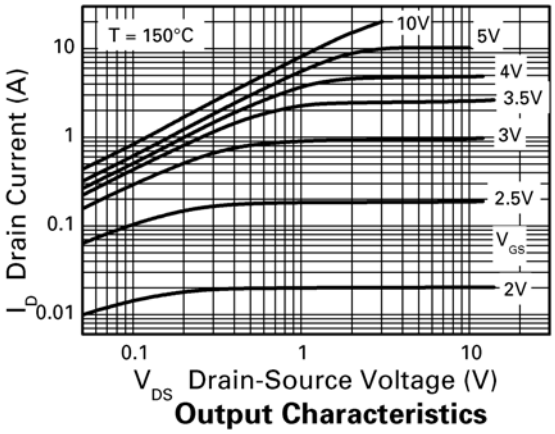


Output Characteristics

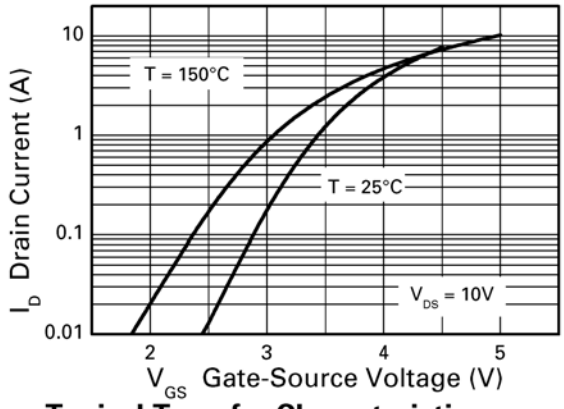


Typical Transfer Characteristics

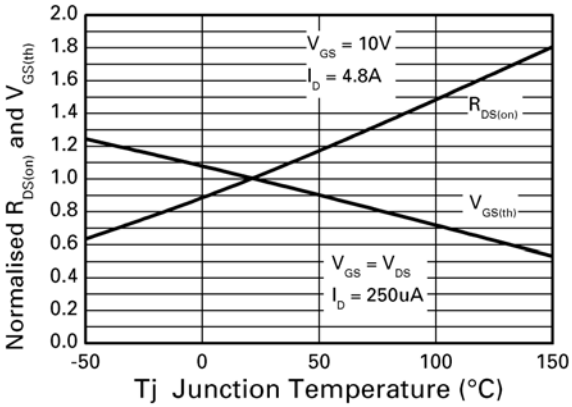

Normalised Curves v Temperature

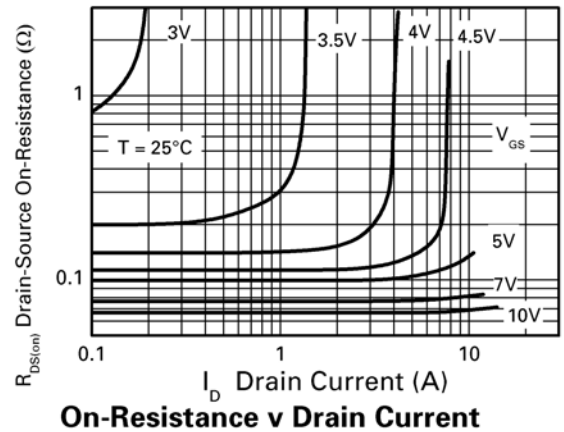


On-Resistance v Drain Current

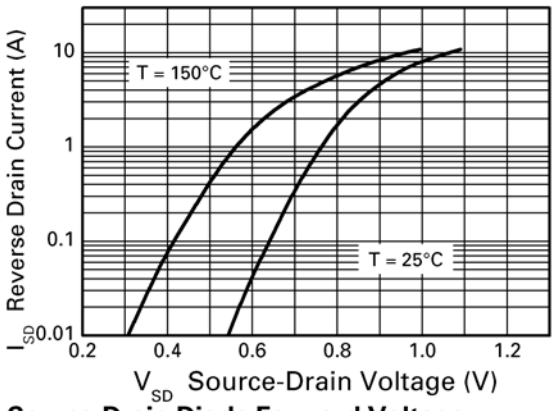


Source-Drain Diode Forward Voltage

© Zetex Semiconductors plc 2006


Typical characteristics

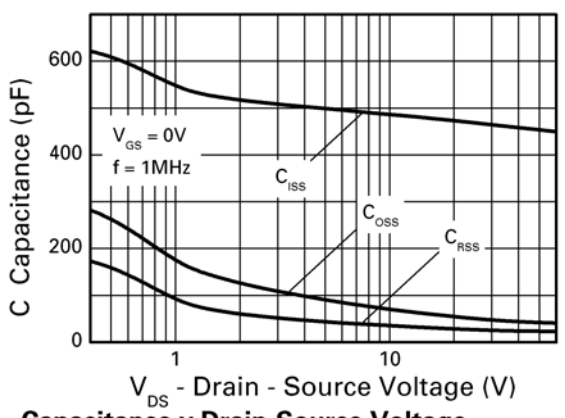


Capacitance v Drain-Source Voltage

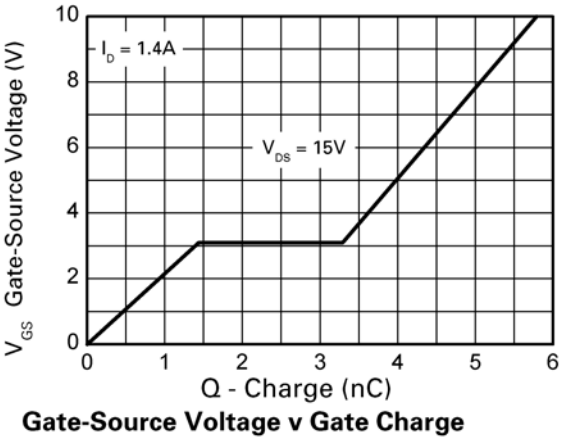


Gate-Source Voltage v Gate Charge

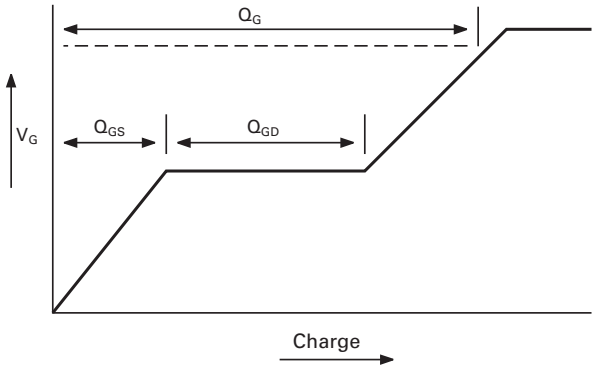


Basic gate charge waveform

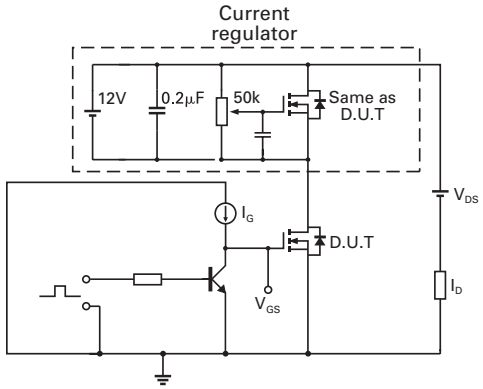

Gate charge test circuit

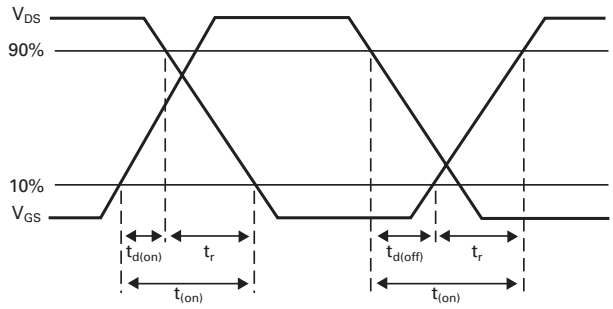

Switching time waveforms

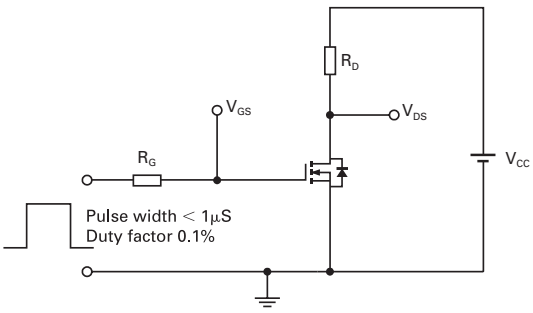


Switching time test circuit

© Zetex Semiconductors plc 2006

Intentionally left blank

© Zetex Semiconductors plc 2006

Package outline - SOT223

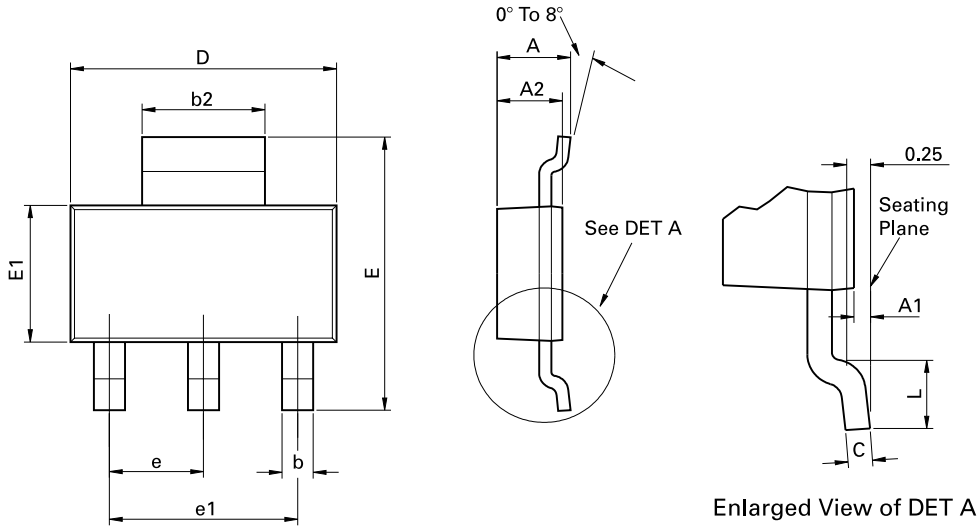

Conforms to JEDEC TO-261 AA Issue B

DIM	Millimeters		Inches		DIM	Millimeters		Inches	
	Min	Max	Min	Max		Min	Max	Min	Max
A	-	1.80	-	0.071	e	2.30 BSC		0.0905 BSC	
A1	0.02	0.10	0.0008	0.004	e1	4.60 BSC		0.181 BSC	
b	0.66	0.84	0.026	0.033	E	6.70	7.30	0.264	0.287
b2	2.90	3.10	0.114	0.122	E1	3.30	3.70	0.130	0.146
C	0.23	0.33	0.009	0.013	L	0.90	-	0.355	-
D	6.30	6.70	0.248	0.264	-	-	-	-	-

Note: Controlling dimensions are in millimeters. Approximate dimensions are provided in inches

Europe
Zetex GmbH
Streitfeldstraße 19
D-81673 München
Germany

Telefon: (49) 89 45 49 49 0
Fax: (49) 89 45 49 49 49
europe.sales@zetex.com

Americas
Zetex Inc
700 Veterans Memorial Highway
Hauppauge, NY 11788
USA

Telephone: (1) 631 360 2222
Fax: (1) 631 360 8222
usa.sales@zetex.com

Asia Pacific
Zetex (Asia Ltd)
3701-04 Metroplaza Tower 1
Hing Fong Road, Kwai Fong
Hong Kong

Telephone: (852) 26100 611
Fax: (852) 24250 494
asia.sales@zetex.com

Corporate Headquarters
Zetex Semiconductors plc
Zetex Technology Park, Chadderton
Oldham, OL9 9LL
United Kingdom

Telephone: (44) 161 622 4444
Fax: (44) 161 622 4446
hq@zetex.com

For international sales offices visit **www.zetex.com/offices**

Zetex products are distributed worldwide. For details, see **www.zetex.com/salesnetwork**

This publication is issued to provide outline information only which (unless agreed by the company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contact or be regarded as a representation relating to the products or services concerned. The company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

© Zetex Semiconductors plc 2006