





宏聚电子五金制品有限公司


HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

S-03F-12-4




Rating: 6.3A 250V AC (UL CUL) 

6.3A 250V AC (VDE)

10A 250V AC (CCC) 

Insulation Resistance: DC 500V 100MΩ Min.




Dielectric Strength: AC2000V 1 minute

Fuse:Ø5.0x20mm 

MATERIAL:

Body:PBt

Terminal:Brass, Silver or Tin plated

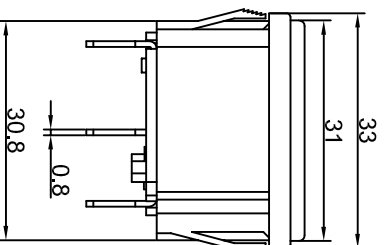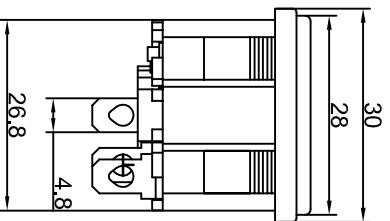

CUT-OUT

		公差 TOLERANCES		.X±0.3		.XX±0.15		角度 ANGLE ±1°		单位 DIMENSION UNIT	
		版本 VERSION		A0		比例尺 SCALE		NONE		日期 DATE	
		核 准 APPROVED BY		Xinchao_Lee		核 对 CHECKED BY		Gokey_Guo		绘图 DATE	
		日期 DATE		2008.07.08		ECN NO.		N/A		2008.07.08	
版本 VER.		变更说明 CHANGE DESCRIPTION		New Issue		变更日期 DATE		2008.07.08		品名 TITLE	
										S-03F-12-4	
										图号 DRAWING NO	
										S-03F-12-4_A0	