


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/25/10	

APPROVED: _____
 DATE: _____ TITLE: _____

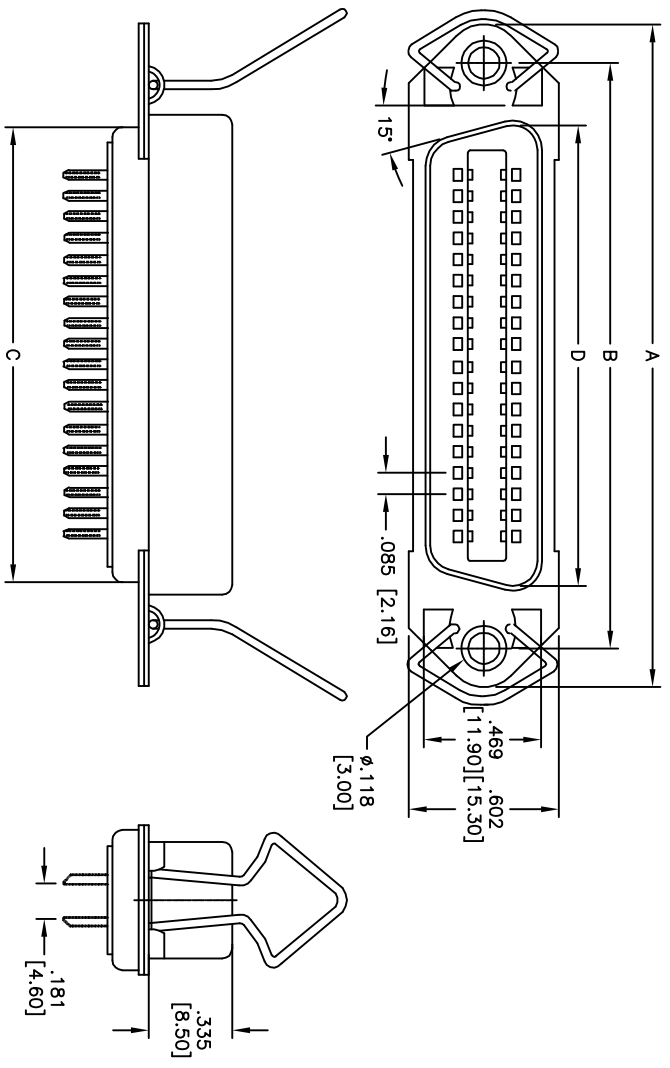

MRXX	NO. OF CONTACTS	DIMENSIONS			
		A	B	C	D
MR14	14	1.728 [43.90]	1.417 [36.00]	.894 [22.70]	.992 [25.20]
MR24	24	2.154 [54.70]	1.843 [46.80]	1.319 [33.50]	1.417 [36.00]
MR36	36	2.665 [67.70]	2.350 [59.70]	1.835 [46.60]	1.925 [48.90]
MR50	50	3.260 [82.80]	2.949 [74.90]	2.429 [61.70]	2.524 [64.10]

SPECIFICATIONS:

Material: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Blue
 Contacts: Phosphor Bronze
 Shell: Steel, Nickel plated
 Plating: Gold flash over Nickel underplate on mating area, Tin over Copper underplate on tails
 Electrical:
 Current rating: 5 Amp max
 Insulation resistance: 25 mohms max
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +105°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

MINIATURE RIBBON SOCKET
 SOLDER TERMINALS, .120 [3.05] HOLES

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		TITLE	
.X ± .10	ØXX ± .10	MINIATURE RIBBON SOCKET	
.XX ± .020	ØXXX ± .015	SOLDER TERMINALS, .120 [3.05] HOLES	
.XXX ± .015	ØXXXX ± .010		
APPROVALS		DATE	SIZE
DRAWN	AY	11/25/10	X
CHECKED	AH	11/25/10	X
APPROVED			
REF: S0003T		SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1