Product data sheet

Specifications



RIO drop adaptor module Modicon Quantum - 2 connectors with redundant cable

140CRA93200

To be discontinued on: 31 December 2022

To be end-of-service on: 31 December 2030

To be discontinued

Main

Range of product	Modicon Quantum automation platform
Product or component type	RIO drop adaptor module

Complementary

Product compatibility	Quantum
Maximum number of I/O expansion module	27
Type of cable	75 Ohm coaxial cable
Transmission rate	1544 Mbit/s
Dynamic range	35 dB
Isolation voltage	500 V DC coaxial center and ground
Electrical connection	2 female connectors F, elbowed with redundant cable
Diagnostics startup	Power up and runtime RAM address/data Executive checksum
Power dissipation in W	3.8 W 2 channels
Bus current requirement	750 mA 2 channels
Module format	Standard

Environment

Standards	UL 508 CUL CSA C22.2 No 142
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80…1000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0…60 °C
Ambient air temperature for storage	-40…85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	530.0 g
Package 1 Height	5 cm
Package 1 width	16.5 cm
Package 1 Length	31.5 cm
Unit Type of Package 2	S03
Number of Units in Package 2	7
Package 2 Weight	4.207 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Contractual warranty


Warranty	18 months

Product data sheet 140CRA93200

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

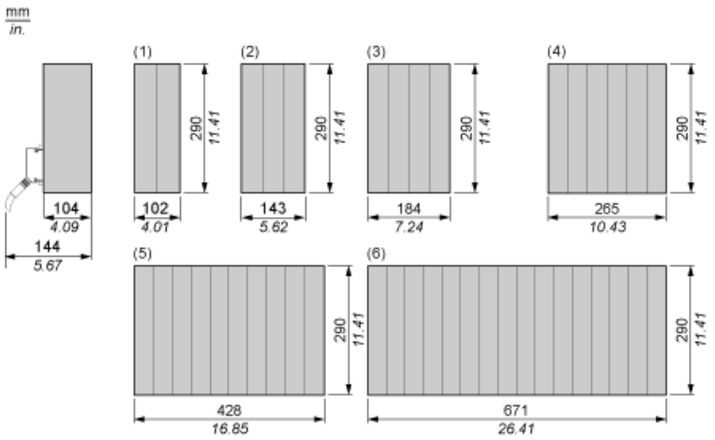

(1) 2 slots
(2) 3 slots
(3) 4 slots
(4) 6 slots
(5) 10 slots
(6) 16 slots

Recommended replacement(s)

140CRA93200 is replaced by:

1x 

Modicon X80 EIO Drop adapter with Ethernet backplane

BMECRA31210