

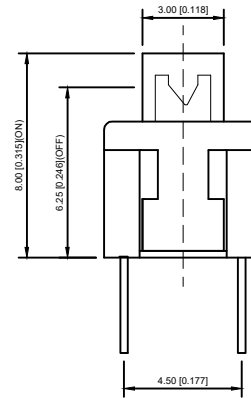


向视图

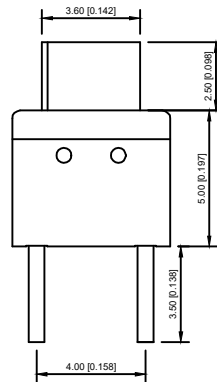

P.C.B LAYOUT
TOP VIEW

SPECIFICATIONS 规格

POLE-POSITION 杆位:SPDT, DPDT

CONTACT RATING 触点额定值:12 VDC, 50 mA

CONTACT RESISTANCE 接触电阻:100 mΩ MAX.1.5 V DC;100 mA,
by Method of Voltage DROP

INSULATION RESISTANCE 绝缘电阻:100 MΩ MIN.500 V DC for 1 minute

DIELECTRIC STRENGTH 耐电压:Breakdown is not Allowable;
500 V AC for 1 Minute

OPERATING FORCE 操作力:250±50 gf

OPERATING LIFE 工作寿命:50,000 cycles

OPERATING TEMPERATURE RANGE 工作温度范围:-20°C~70°C

TOTAL TRAVEL/OPERATING TRAVEL 总行程/运行行程:2+0.3 mm/1.3±0.3mm

A4			
A3			
A2			
A1			
REV	DATE	REVISION DESCRIPTION	ISSUE



COMMON TOLERANCE

X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME:
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP-0103-4
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
ROCPCU TECHNOLOGY CO.,LTD				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basis of manufacture or sale of apparatus without permission				