

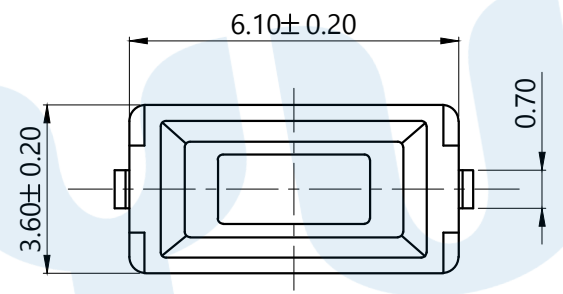
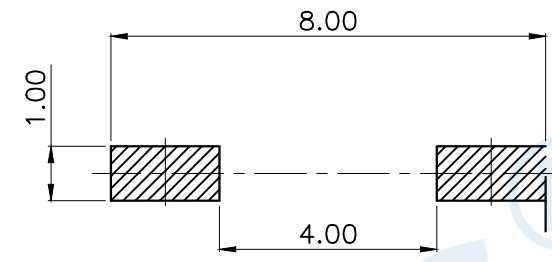

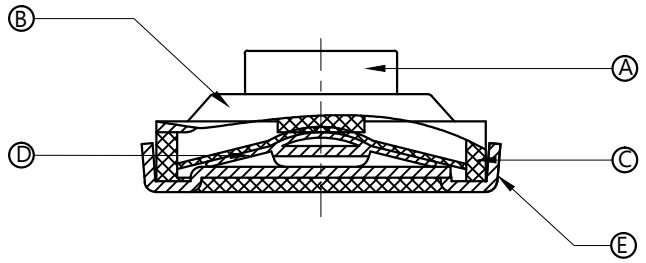


RoHS



| SHRAPNEL | |
|----------|--------------|
| CODE | MATERIAL/QTY |
| D2 | SUS/1PCS |
| D4 | SUS/2PCS |

| OPERATING FORCE | |
|-----------------|----------|
| CODE | VIGOR |
| B1 | 120±30gf |
| B2 | 180±30gf |
| B3 | 250±30gf |

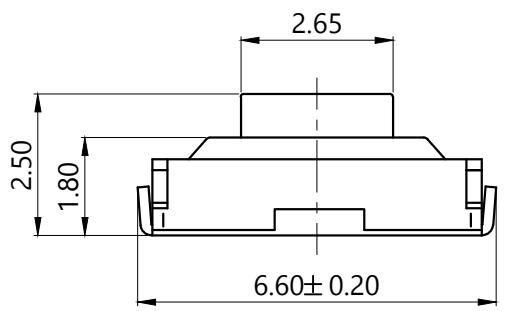

| NO. | Name | Number | Qty | Materil | Remarks |
|-----|----------|--------|-----|---------|----------------|
| ⑤ | Terminal | | 2 | Brass | Silvering |
| ④ | Reed | | 1 | SUS | Silver covered |
| ③ | Base | | 1 | PA46 | Black |
| ② | Cover | | 1 | SUS | Tin Plating |
| ① | Button | | 1 | PA46 | White |

YUANDI® Yuandi Electronics Co, Ltd

| | | | |
|----------|------|------|---------------|
| design | date | name | TACT SWITCHS |
| Review | date | name | TS-1092U-B□□□ |
| Approved | date | name | |

| | | | | | | | | |
|--|--|--|--|--|--|--------|-------------------------|----------|
| | | | | | | | angle | ±2' |
| | | | | | | | 10~30 | ±0.30 |
| | | | | | | | 5~10 | ±0.20 |
| | | | | | | | ~ 5 | ±0.10 |
| | | | | | | | Tolerance not specified | |
| | | | | | | modify | Review | Approved |