


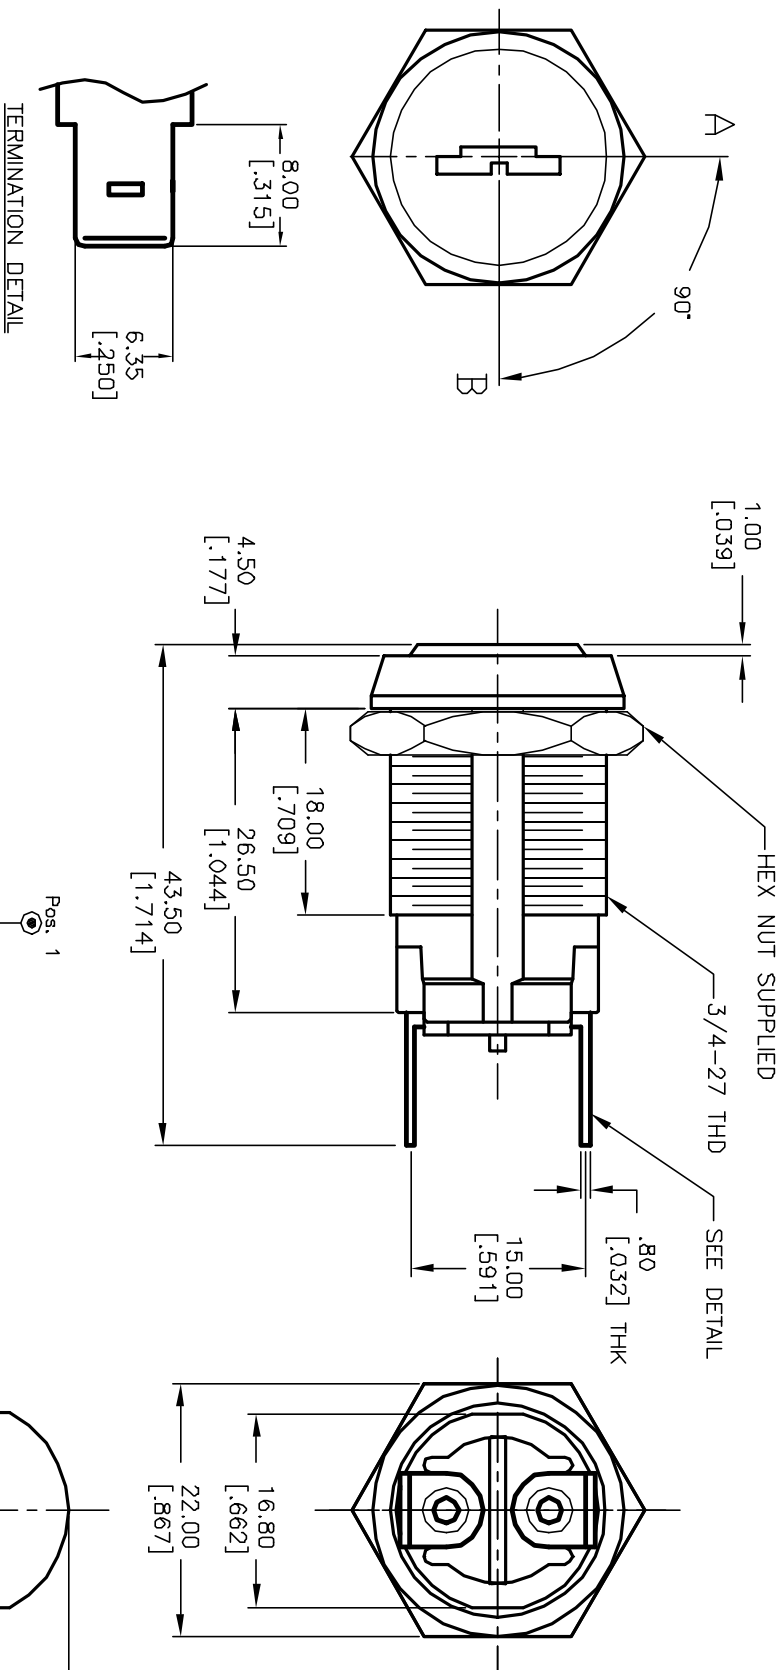

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 4A @125VAC, 2A @250VAC
5. CONTACT RESISTANCE: 10mILLI-OHMS
6. DIELECTRIC STRENGTH: 1500 VAC-1Minute
7. INSULATION RESISTANCE: 200 Mega-OHMS
8. MATERIALS:

HOUSING: ZINC ALLOY DIE CAST
CYLINDER: ZINC ALLOY W/CHROME PLATE
CONTACTS: SILVER PLATE
CRISS CROSS TUMBLERS. (11 BLADE)
DOUBLE BITTED KEYS (2) STAMPED 2007


LEGEND

- = INDICATE NO KEY PULL
- ⦿ = INDICATES KEY PULL POSSIBLE

CIRCUIT: SPST
CONTACT CONFIGURATION

SWITCH FUNCTION	
POS 1	POS 2
↑	→
DN	DN

RECOMMENDED PANEL CUTOUT

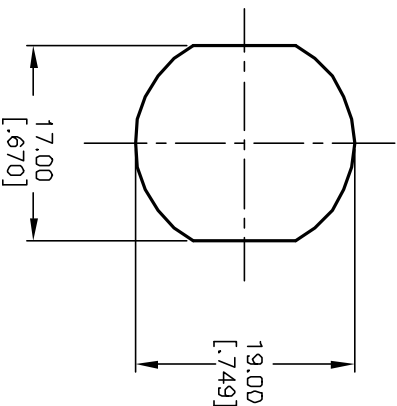

CRSS CROSS TUMBLERS. (11 BLADE) DOUBLE BITTED KEYS (2) STAMPED 2007					E-SWITCH®				
B	12872	REMOVE TERM /NOTE 8	3/4/03	CJB	TITLE				
A	11754	RELEASED FOR PRODUCTION	10/17/01	CJB	K0128F-2007				
REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					1.5:1	10/17/01	CJB	K200203	B