




REV.	ECN. NO.	NAME	DATE

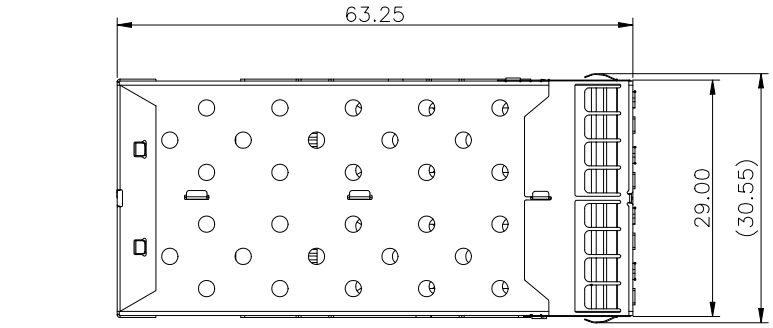

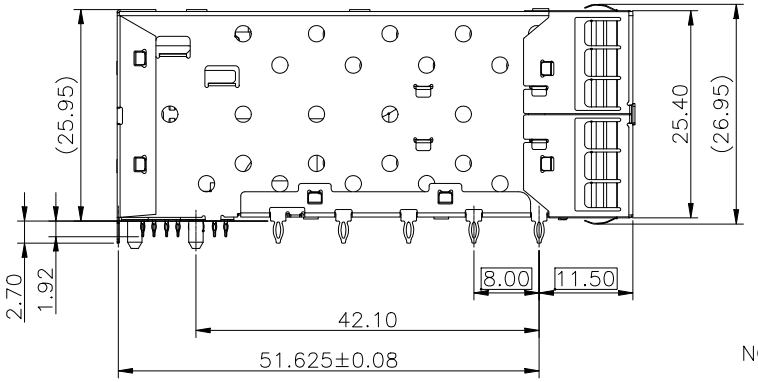


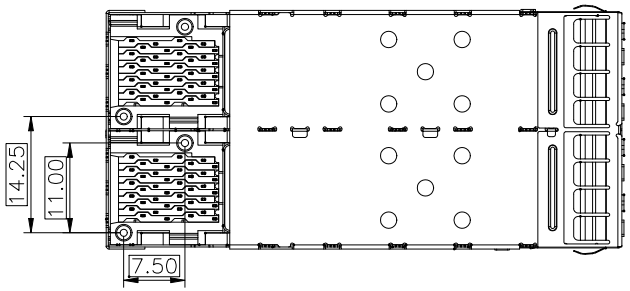

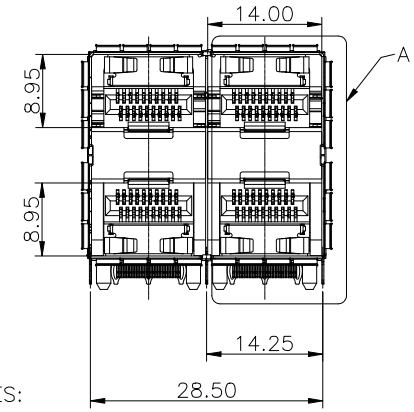



CONNECTOR PIN-OUT
COMPONENT SIDE OF BOARD



DETAIL A
1:1

NOTES:

MATERIAL:
CAGE: NICKEL SILVER, THICKNESS 0.25mm
CONNECTOR:
PLASTIC HOUSING: HIGH TEMPERATURE LCP, UL94 V-0.
SPRING: STAINLESS STEEL, THICKNESS 0.20mm
CONTACTS: PHOSPHOR BRONZE, THICKNESS 0.20mm
PLATING: 15μ" MIN. GOLD ON MATING AREA,
150μ" MIN. MATE TIN ON SOLDER TAILS.

PACKAGING: TRAY PACKAGING.


TEMPARATURE RANGE: -40°C TO +85°C


RoHS Compliant

TOLERANCE UNSPECIFIED .0 ± 0.38 .00 ± 0.25 .000 ± 0.10 ANGLE ± 3.00° MANUFACTURING COPY		VITALCONN a vital connector company		FOR YOUR VITAL CONNECTION	
		TITLE: SFP+2*2CAGE+ CONN			
DRAWN BY:	BECKER	PART NO:	SN221		REV: A
CHECKED BY:	VTA	SIZE: A4	UNIT: mm	SHEET:1OF3	FCN: A4
APPROVED BY:	QPF	PROJECTION		http://www.vitalconn.com	

Download from alldatasheet.com

REV.	ECN. NO.	NAME	DATE

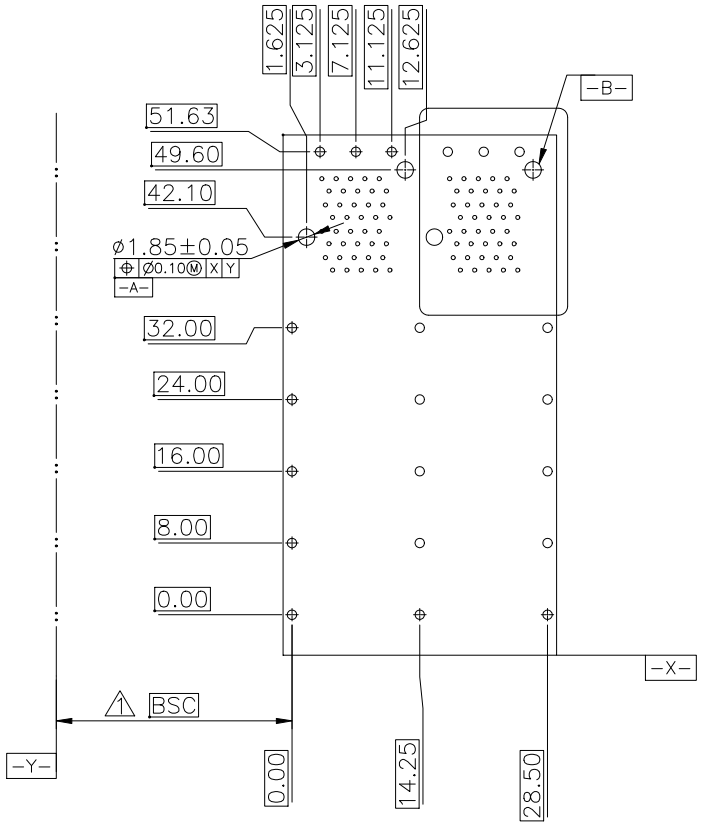

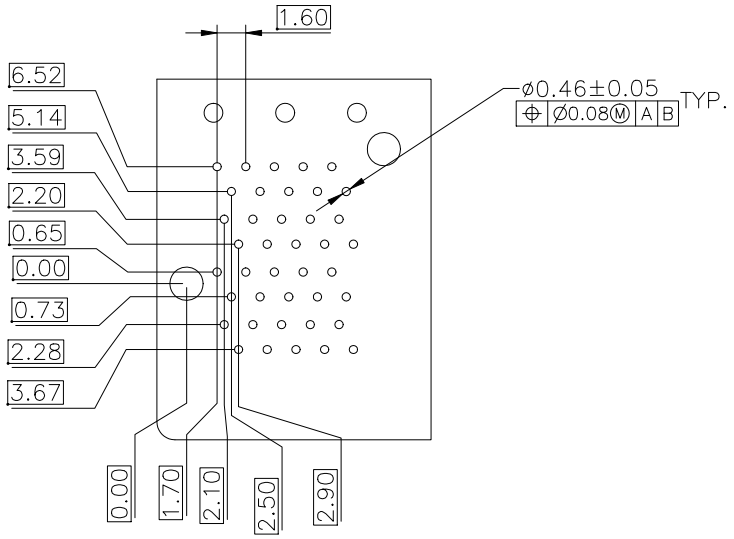

NOTES:

1. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
2. 1.05 mm DIAMETER HOLES ARE CHASSIS GROUND (18 HOLES).


ECOMMENDED PCB CONFIGURATION


RoHS Compliant


TOLERANCE UNSPECIFIED .0 ± 0.38 .00 ± 0.25 .000 ± 0.10 ANGLE ± 3.00° MANUFACTURING COPY		VITALCONN a vital connector company		FOR YOUR VITAL CONNECTION	
		TITLE: SFP+2*2CAGE+ CONN			
DRAWN BY:	BECKER	PART NO:	SN221		REV: A
CHECKED BY:	VTA	SIZE: A4	UNIT: mm	SHEET:2OF3	FCN: A4
APPROVED BY:	QPF	PROJECTION		http://www.vitalconn.com	


Download from alldatasheet.com

REV.	ECN. NO.	NAME	DATE

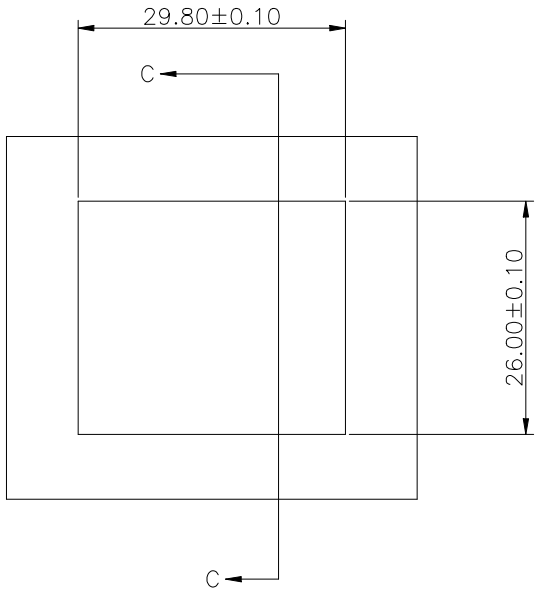

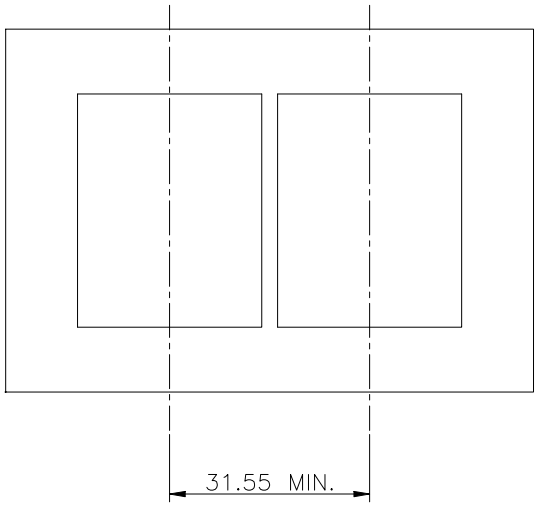

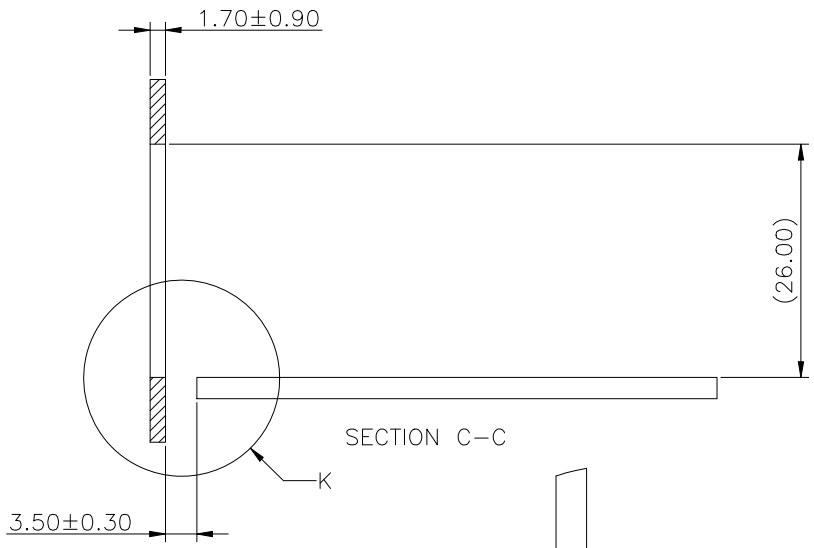

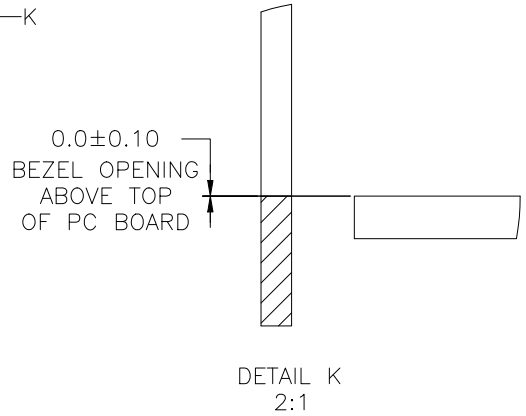

DETAIL K
2:1

RECOMMENDED BEZEL DESIGN

RoHS Compliant

TOLERANCE UNSPECIFIED .0 ± 0.38 .00 ± 0.25 .000 ± 0.10 ANGLE ± 3.00° MANUFACTURING COPY		VITALCONN a vital connector company		FOR YOUR VITAL CONNECTION	
		TITLE: SFP+2*2CAGE+ CONN			
DRAWN BY:	BECKER	PART NO:	SN221		REV: A
CHECKED BY:	VTA	SIZE: A4	UNIT: mm	SHEET:3OF3	FCN: A4
APPROVED BY:	QPF	PROJECTION		http: //www.vitalconn.com	

Download from alldatasheet.com