




SD 023

NON-PLATED PART NUMBER	TIN-PLATED PART NUMBER	AWG WIRE RANGE	FITS MALE TAB SIZE	"L" MAX.	"B" ±1/64	"W" 1/64	"D" ±.01	"H" 1/64	"E" 1/64	REF. WIRE INSULATION DIAMETER	MATERIAL
	P-4178	14-12	.250x.032	.802	.34	.301	.156	.107	.310	.100/.175	.016 THICK BRASS

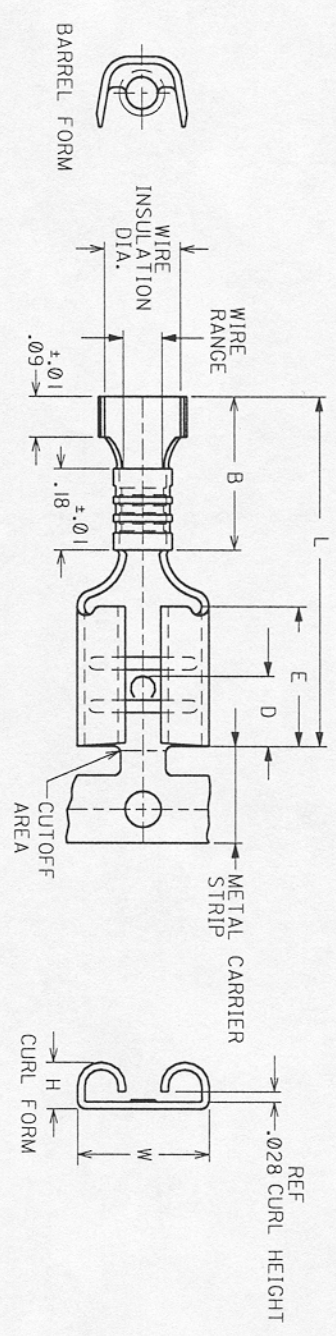

\*VIBRAKRIMP®  
 CLOSED ELECTRICAL BARREL W/OPEN VIBRATION SUPPORT  
 METAL STRIP QUICK DISCONNECTS

DIMENSIONS SHOWN METRIC INCH	
3 PLACE	±.005
2 PLACE	±.01
1 PLACE	±.025

UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ±1/2°

DRAG: WIRE AND INSULATION MUST REMAIN WITHIN DIMENSIONS

GEN. BY: EDB RWD  
 App'd: RWD SCALE: NONE

TITLE	
REVISE ONLY ON CAD SYSTEM	
CUSTOMER DRAWING	
CUSTOMER DRAWING	
VIBRAKRIMP O.D.	
.250 X .032 TAB SIZE	
PINEBLISS PARK, FLA. 32181 U.S.A.	
ETC INC.	INC.
SEE TABLE	SD19018-001
DATE	98/06/25

CUSTOMER DRAWING	
LTR.	A
REVISIONS	NEW CUSTOMER DWG FOR P-4178 ET80350 6/25 EDB