



Bestückungsplan / contact layout

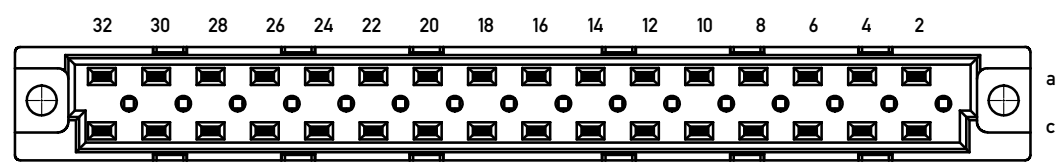

Leiterplatten-Lochbild Vorschlag / PCB drillhole pattern proposal

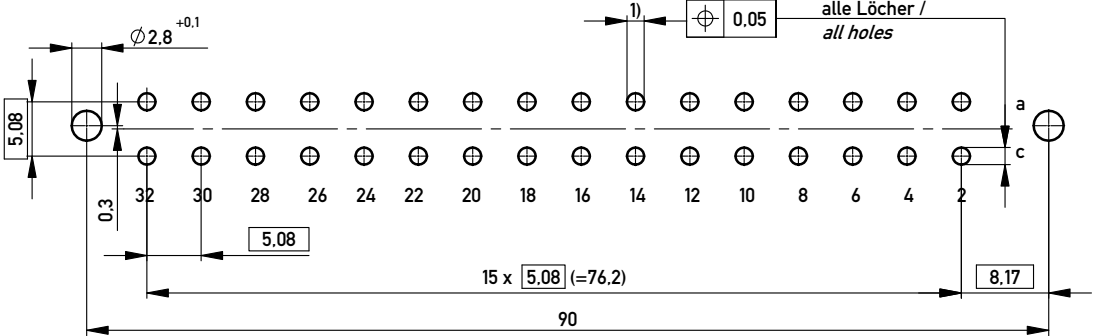

Elastische Einpresszone mit Übergabesteckzone / compliant pressfit zone with mating transfer zone
 Isolierwerkstoff / housing material: PBT GF30
 Bauart 7 / type 7
 Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles
 Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
 Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2
 Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 / Nr. 10
 diameter of drilled hole see drawing 164062 / No. 10
 1) $\phi 1,6^{+0,09}_{-0,06}$ Durchmesser des metallisierten Loches
 $\phi 1,6^{+0,09}_{-0,06}$ Diameter of finished plated-through hole

Information:		Tolerances		Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation	
				Federleiste D 32 EE Fem. Connector D 32 Pressfit	
		www.ERNI.com		354021	
d	26.04.2013			I	
Index	Date			A3	
				Class	STVD

Copyright by ERNI GmbH. Proprietary notice pursuant to ISO 9006 to be observed.