

Pb Free Plating Product

B302N/B303N/B304N/B305N/B306N



30 Ampere Standard Type Negative Block Rectifier Diodes for Mitsubishi Alternator

Feature:

- ◆ Low leakage
- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ High forward surge current capability


Application:

- ◆ Block Diode/Alternator Diode with AEC-Q101 Grade Quality
- ◆ Stack Silicon Diffused Diode alternative
- ◆ Special for Automotive AC Alternator rectifier application

Mechanical Data:

- ◆ Technology: Latest Glass Passivation Pellet/Cu Clip Bonding
- ◆ Case: Vacuum soldered/sintered temperature < 260
- ◆ Cathode Polarity: As marked on body
- ◆ Lead: Plated lead, solderable per MIL-STD-202E method 208C
- ◆ Mounting: BLOCK/TO-230/BA/MR/K series package type

BLOCK/TO-230/BA/MR/K series

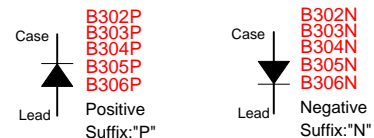

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%


	SYMBOLS	B302N	B303N	B304N	B305N	B306N	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	200	300	400	500	600	Volts
Maximum RMS Voltage	V_{RMS}	140	210	280	350	420	Volts
Maximum DC Blocking Voltage	V_{DC}	200	300	400	500	600	Volts
Maximum Average Forward Rectified Current, At $T_c = 105^\circ C$	I_o	30					Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	400					Amps
Rating for fusing ($t < 8.3ms$)	I^2t	664					A^2S
Maximum Instantaneous Forward Voltage Drop at 100A	V_F	1.10					Volts
Maximum DC Reverse Current at Rated $T_A=25^\circ C$	I_R	5.0					μA
DC Blocking Voltage $T_A=100^\circ C$		100					
Typical Thermal Resistance	$R_{\theta JL}$	1.0					$^\circ C/W$
Operating and Storage Temperature Rang	T_L, T_{STG}	(-65 to +175)					$^\circ C$

NOTES:


1.Enough heatsink must be considered in application.

RATINGS AND CHARACTERISTIC CURVES B302N thru B306N


F1G.1 TYPICAL FORWARD CURRENT DERATING CURVE

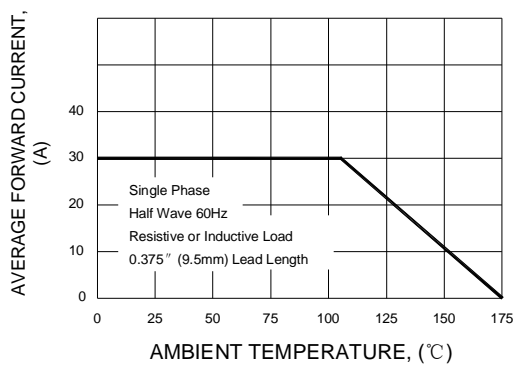


F1G.2 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

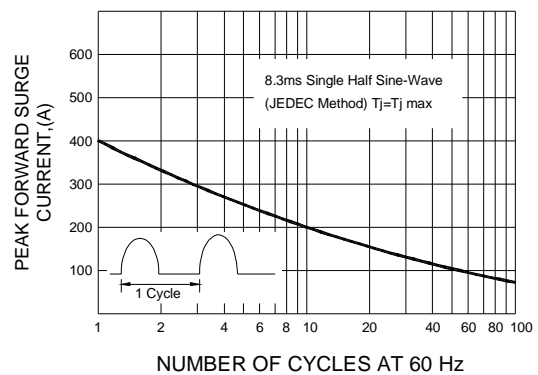


F1G.3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

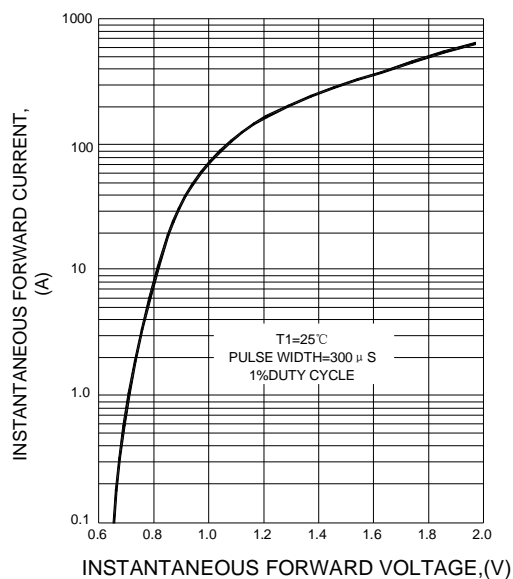

F1G.4 FORWARD POWER DISSIPATION

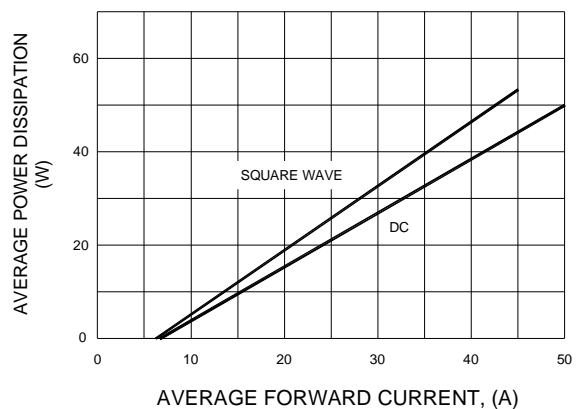

BLOCK/TO-230/BA/MR/K Series Package Outline

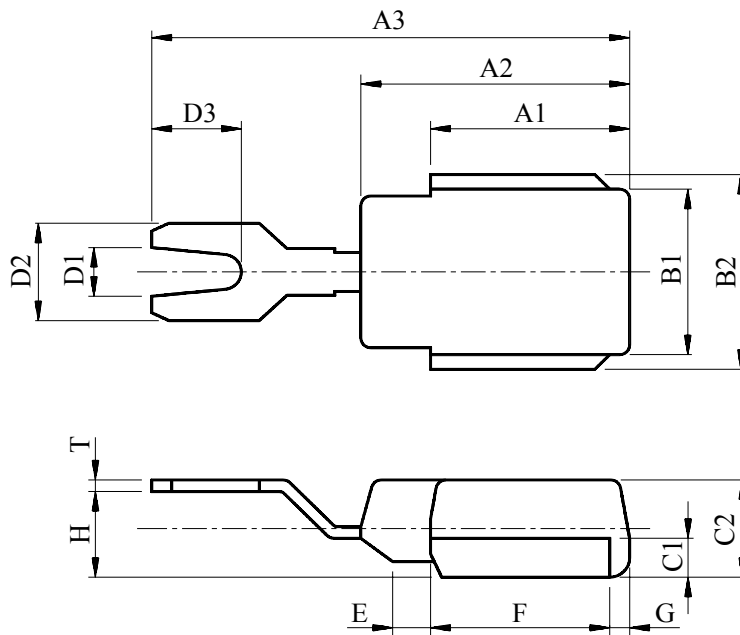

DIM	MILLIMETERS	DIM	MILLIMETERS
A1	10.0±0.3	D2	5.0±0.3
A2	13.5±0.3	D3	4.5±0.3
A3	24.0±0.5	E	1.9±0.3
B1	8.5±0.3	F	9.0±0.3
B2	10.0±0.3	G	1.0±0.3
C1	2.0±0.3	H	4.4±0.5
C2	5.0±0.3	T	0.6±0.3
D1	2.5±0.3		