

OFC

OFC-740X Series Modularized Open Frame Computer with Pentium® 4 Solution

Features and Benefits:

- Supports Intel® Pentium® 4 / Pentium® 4-M / Celeron® CPU up to 2.8 GHz
- 17" 15" 12" LCD display and high performance solution
- Follow customer need make front bezel
- High precision touchscreen
- Supports Gigabit LAN
- Optional IDE interface, Type II CompactFlash slot or horizontal DOM
- Optional 1 x ISA / 1 x PCI Riser Card Module
- Optional slim FDD / slim CD-ROM Drive



No. 24, Lane 365, Yang Guang St., Nei Hu District, Taipei 114, Taiwan, R.O.C.

Tel: +886-2-8751-1111

Fax: +886-2-8751-1199

Email: sales@protech.com.tw

<http://www.protech.com.tw>




ISO CERTIFIED
9001 14001


OFC-740X Series

Modularized Open Frame Computer with Pentium® 4 Solution


Front View

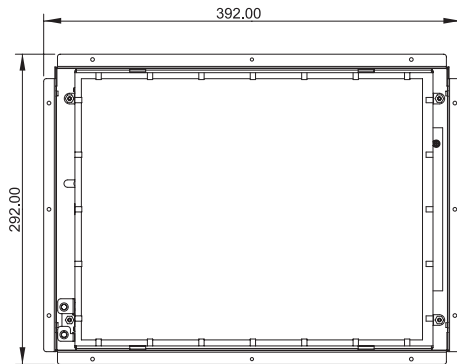

Rear View

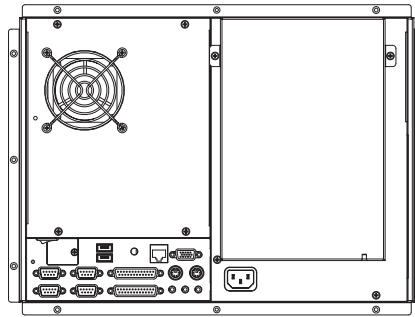

Side View

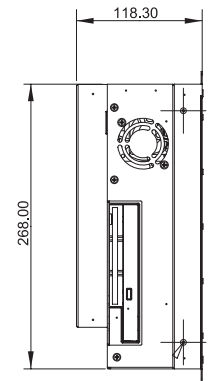

Unit: mm

Specification

System	
CPU Type	Intel® Pentium® 4 / Pentium® 4-M / Celeron® Up to 2.8GHz
Memory Support	1 x DIMM, DDR333 memory up to 1GB max.
Open Frame	Yes
Power Supply	AC 200W power supply
O.S. Support	Win 98SE / 2000 / XP, Linux Redhat 8.0/9.0
System Weight	17" : 13 kg (28.66lb) 15" & 12" : 9.5 kg (21.38lb)
Dimension (WxHxD)	17" : 440 x 344 x 107 mm (17.32" x 13.54" x 4.21") 15" & 12" : 400 x 300 x 99 mm (15.6" x 11.7" x 3.89")
VESA Mounting Support	Only 15" & 12" 75mm / 100mm VESA bracket (optional)
Certificate	17" & 15" : CE / FCC / LVD / UL 12" : CE / FCC / LVD

I/O Ports

USB	2 x USB 2.0
KB / Mouse	2
Audio	Line in / Line out / MIC in
Parallel	1 x parallel port (SPP / EPP / ECP)
Serial Ports	4 x COMs (pin 9 support +5V or +12V), COM2 for RS232/422/485
LAN	10/100/1000 Mbps
VGA	1
Drive Bay	1 x 3.5" HDD, 1 x slim CD-ROM, 1 x slim FDD
Expansion Slots	1 x PCI + 1 x ISA (optional)

Display

LCD	17" SXGA, 15" XGA, 12" SVGA
Touch Screen	7W Analog resistive (USB interface)

Environment

Operating Temp.	0° ~ 40°C
Storage Temp.	-20° ~ 60°C
Humidity	20% ~ 90%

Ordering Information

OFC-7407	Open Frame with 17" LCD, S478 P-4 CPU board, resistive touchscreen, 200W AC power supply
OFC-7405	Open Frame with 15" LCD, S478 P-4 CPU board, resistive touchscreen, 200W AC power supply
OFC-7402	Open Frame with 12" LCD, S478 P-4 CPU board, resistive touchscreen, 200W AC power supply
PPC-7400-1P11	1 x PCI + 1 x ISA riser card for OFC-740X
PPC-VESAKIT	VESA bracket

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in DEC, 2006