Super Flux Pure Green LED
OSG5DAZ3K1D


■Features

- High Luminous Super Flux Output
- Superior Weather-resistance
- UV Resistant Epoxy
- Water Clear Type

■Applications

- Automotive Dashboard Lighting
- Back Lighting
- Other Lighting

■Outline Dimension

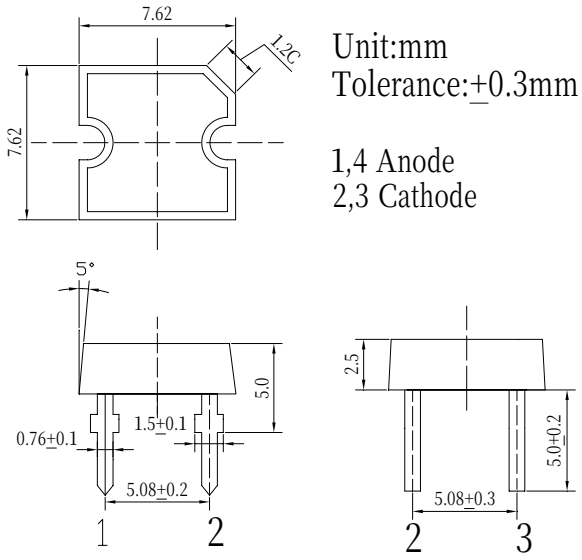

Unit:mm
Tolerance:±0.3mm


1,4 Anode
2,3 Cathode

■Absolute Maximum Rating (Ta=25℃)

Item	Symbol	Value	Unit
DC Forward Current	I_F	30	mA
Pulse Forward Current*	I_{FP}	100	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	108	mW
Operating Temperature	Topr	-30 ~ +85	℃
Storage Temperature	Tstg	-40 ~ +100	℃
Lead Soldering Temperature	Tsol	260℃/5sec	-

*Pulse width Max.10ms Duty ratio max 1/10

■Directivity

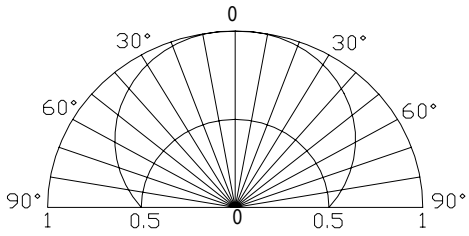

■Electrical -Optical Characteristics (Ta=25℃)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V_F	I_F=20mA	2.9	3.1	3.6	V
DC Reverse Current	I_R	V_R=5V	-	-	10	μA
Domi. Wavelength*	λ_D	I_F=20mA	520	525	530	nm
Luminous Intensity*	Iv	I_F=20mA	-	1000	-	mcd
50% Power Angle	$2\theta_{1/2}$	I_F=20mA	-	180	-	deg

*1 Tolerance of dominant wavelength is ±1nm

*2 Tolerance of luminous intensity is ±15%

TÜV CERT ISO 9001 : 2000
RWTUV Certified Company
www.optosupply.com RoHS Compliant EU2002/95/EC
ATTENTION OBSERVE PRECAUTIONS ELECTROSTATIC SENSITIVE DEVICES