



## Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

## Complementary

Jumper cable end 1	M12 male 3 pins straight connector with screw-on
Jumper cable end 2	M12 female 3 pins straight connector with screw-on
Collar material	Metal
Cable composition	3 x 0.25 mm <sup>2</sup>
Cable length	2 m
Wire insulation material	PVC
Cable outer diameter	4.6 mm
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	3 A
Insulation resistance	>= 1000 MOhm
Maximum resistance across terminals	5000 mOhm
Net weight	0.1 kg

## Environment

IP degree of protection	IP65 IP67
Product certifications	CULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C

## Packing Units

Package 1 Weight	0.082 kg
Package 1 Height	0.150 dm
Package 1 width	1.800 dm
Package 1 Length	2.400 dm

## Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	Yes

## Contractual warranty


---

Warranty

18 months

---

Dimensions

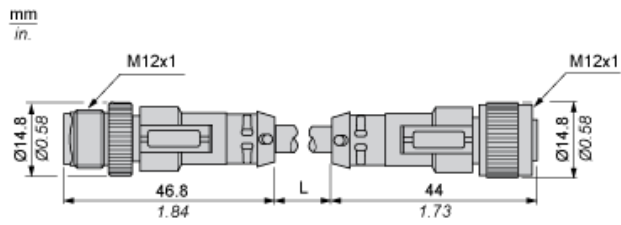

L : Length of cable

---

## Connections and Schemes

---

