




**PIN HEADERS**

**DUAL ROW SMT STRAIGHT 1.27mm**

- Industry Compatible
- Competitively priced
- Various plated contacts available
- 1.27mm pitch
- Various pin lengths available

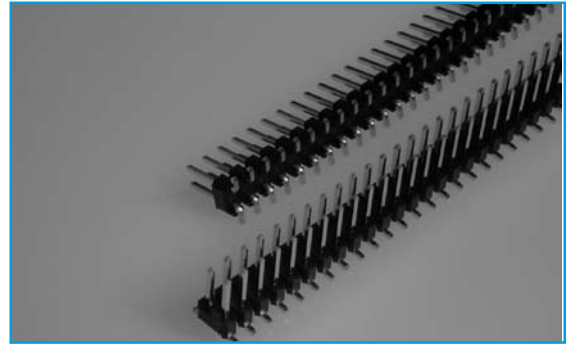


SECTION 8

**SPECIFICATION**


**Material & Finish**

<b>Contact Material:</b>	Brass
<b>Insulator Material:</b>	PBT & Glass-Fibre Reinforced UL94V-0
<b>Current Rating:</b>	1 A DC
<b>Contact Resistance:</b>	30M $\Omega$ Max at 6V DC 0.3A
<b>Insulator Resistance:</b>	1000M $\Omega$ Min at 500V DC
<b>Dielectric Withstanding</b>	
<b>Voltage:</b>	500V AC for One Minute
<b>Operating Temperature:</b>	-40°C to + 105°C

**OUTLINE DRAWING**

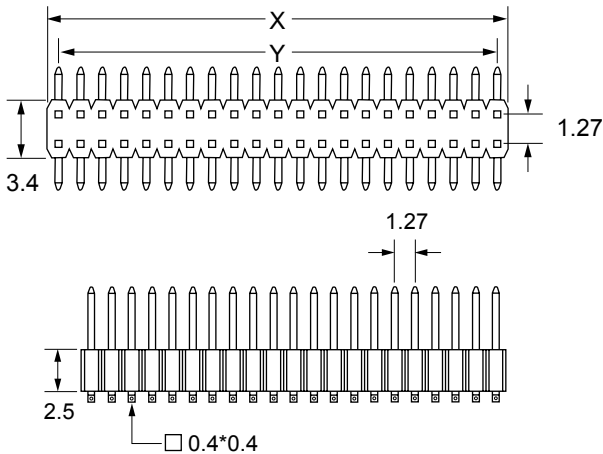

x	1.27 * Position No.
y	1.27 * (Position No.-1)

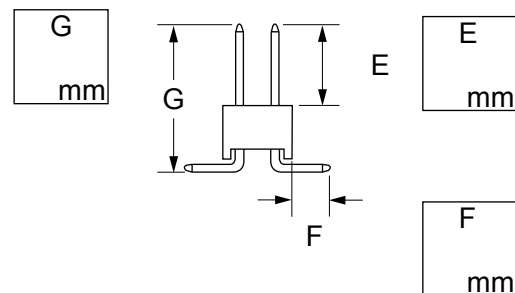

**ORDERING INFORMATION**

<b>DBC</b>	<b>PH</b>	<b>C47</b>	<b>32</b>	<b>A</b>	<b>G</b>	<b>1</b>	<b>-XXX</b>
Dubilier Connectors	Pin Header Connector	Series	No. of Ways 02= 2 Ways Thro to 40= 40 Ways	Contact Material A= Brass	Contact Plating G= Gold Flash T= Tin Plated S= Selective	Colour 1= Black	Unique Special Code *See below

\*Dubilier will allocate a special code to distinguish the pins lengths E,F and G