
CMPA5259050S

50 W, 5.0 - 5.9 GHz, GaN MMIC, Power Amplifier

Description

Cree's CMPA5259050S is a gallium nitride (GaN) High Electron Mobility Transistor (HEMT) based monolithic microwave integrated circuit (MMIC). This MMIC contains a two-stage reactively matched amplifier design approach enabling high power and power added efficiency to be achieved in a 5 mm x 5 mm surface mount (QFN package).



PN: CMPA5259050S
Package Type: 5 x 5 QFN

Typical Performance Over 5.0 - 5.9 GHz (T_C = 25˚C)

Parameter	5.2 GHz	5.5 GHz	5.9 GHz	Units
Small Signal Gain[1,2]	27.0	26.0	27.1	dB
Output Power[1,3]	48.2	48.1	48.6	dBm
Power Gain[1,3]	23.2	23.1	23.6	dB
Power Added Efficiency[1,3]	56	51	49	%

Notes:
[1] V_{DD} = 28 V, I_{DQ} = 500 mA
[2] Measured at Pin = -20 dBm
[3] Measured at Pin = 25 dBm and 150 µs; Duty Cycle = 20%

Features

- >50% Typical Power Added Efficiency
- 27 dB Small Signal Gain
- 65 W Typical P_{SAT}
- Operation up to 28 V
- High Breakdown Voltage
- High Temperature Operation

Note: Features are typical performance across frequency under 25°C operation. Please reference performance charts for additional details.

Applications

- Civil and Military Pulsed Radar Amplifiers

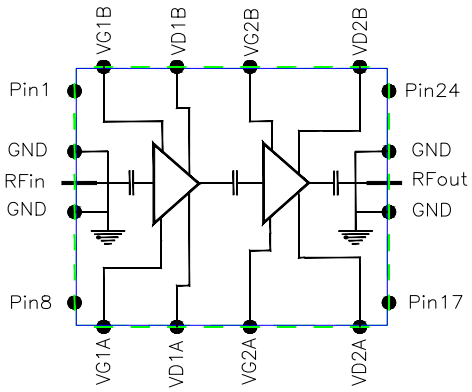


Figure 1.

RoHS COMPLIANT

4600 Silicon Drive | Durham, NC 27703 | wolfspeed.com

Absolute Maximum Ratings (not simultaneous) at 25˚C

Parameter	Symbol	Rating	Units	Conditions
Drain-source Voltage	V_{DSS}	84	VDC	25°C
Gate-source Voltage	V_{GS}	-10, +2	VDC	25°C
Storage Temperature	T_{STG}	-55, +150	˚C	
Maximum Forward Gate Current	I_G	18.96	mA	25°C
Maximum Drain Current	I_{DMAX}	4.5	A	
Soldering Temperature	T_S	260	˚C	

Electrical Characteristics (Frequency = 5.0 GHz to 5.9 GHz unless otherwise stated; T_C = 25˚C)

Characteristics	Symbol	Min.	Typ.	Max.	Units	Conditions
DC Characteristics						
Gate Threshold Voltage	$V_{GS(TH)}$	-2.6	-2.0	-1.6	V	V_{DS} = 10 V, I_D = 18.96 mA
Gate Quiescent Voltage	$V_{GS(Q)}$	–	-1.8	–	V_{DC}	V_{DD} = 28 V, I_{DQ} = 500 mA
Saturated Drain Current[1]	I_{DS}	18.96	22.75	–	A	V_{DS} = 6.0 V, V_{GS} = 2.0 V
Drain-Source Breakdown Voltage	V_{BD}	84	–	–	V	V_{GS} = -8 V, I_D = 18.96 mA
RF Characteristics[2,3]						
Small Signal Gain	$S21_1$	–	27	–	dB	V_{DD} = 28 V, I_{DQ} = 500 mA, P_{IN} = 5 dBm, Freq = 5.2 GHz
Small Signal Gain	$S21_2$	–	26.6	–	dB	V_{DD} = 28 V, I_{DQ} = 500 mA, P_{IN} = 5 dBm, Freq = 5.55 GHz
Small Signal Gain	$S21_3$	–	27.2	–	dB	V_{DD} = 28 V, I_{DQ} = 500 mA, P_{IN} = 5 dBm, Freq = 5.9 GHz
Output Power	P_{OUT1}	–	47.8	–	dBm	V_{DD} = 28 V, I_{DQ} = 500 mA, P_{IN} = 25 dBm, Freq = 5.2 GHz
Output Power	P_{OUT2}	–	47.8	–	dBm	V_{DD} = 28 V, I_{DQ} = 500 mA, P_{IN} = 25 dBm, Freq = 5.55 GHz
Output Power	P_{OUT3}	–	48.1	–	dBm	V_{DD} = 28 V, I_{DQ} = 500 mA, P_{IN} = 25 dBm, Freq = 5.9 GHz
Power Added Efficiency	PAE_1	–	54	–	%	V_{DD} = 28 V, I_{DQ} = 500 mA, P_{IN} = 25 dBm, Freq = 5.2 GHz
Power Added Efficiency	PAE_2	–	53	–	%	V_{DD} = 28 V, I_{DQ} = 500 mA, P_{IN} = 25 dBm, Freq = 5.55 GHz
Power Added Efficiency	PAE_3	–	50	–	%	V_{DD} = 28 V, I_{DQ} = 500 mA, P_{IN} = 25 dBm, Freq = 5.9 GHz
Output Mismatch Stress	VSWR	–	–	3 : 1	Ψ	No damage at all phase angles

Notes:
[1] Scaled from PCM data
[2] Measured in CMPA5259050S high volume test fixture at 5.2, 5.55 and 5.9 GHz and may not show the full capability of the device due to source inductance and thermal performance.
[3]Unless otherwise noted: Pulse Width = 25 µs, Duty Cycle = 1%

Thermal Characteristics

Parameter	Symbol	Rating	Units	Conditions
Operating Junction Temperature	T_J	225	˚C	
Thermal Resistance, Junction to Case (packaged)[1]	$R_{\theta JC}$	1.39	˚C/W	Pulse Width = 150 µs, Duty Cycle =20%

Notes:
[1] Measured for the CMPA5259050S at P_{DISS} = 64 W

Typical Performance of the CMPA5259050S

Test conditions unless otherwise noted: V_D = 28 V, I_{DQ} = 500 mA, Pulse Width = 150 µs, Duty Cycle = 20%, Pin = 25 dBm, T_{BASE} = +25 °C

Figure 1. Output Power vs Frequency as a Function of Temperature

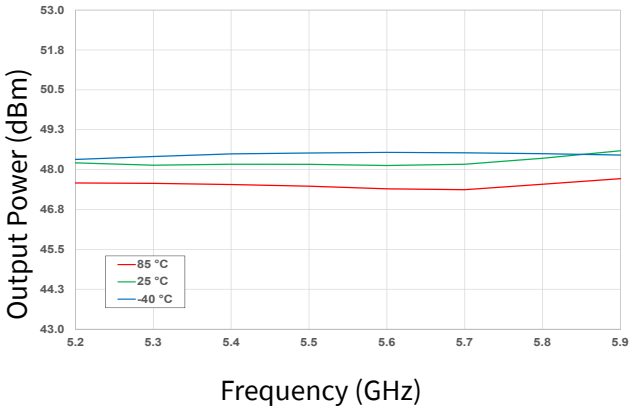


Figure 2. Output Power vs Frequency as a Function of Input Power

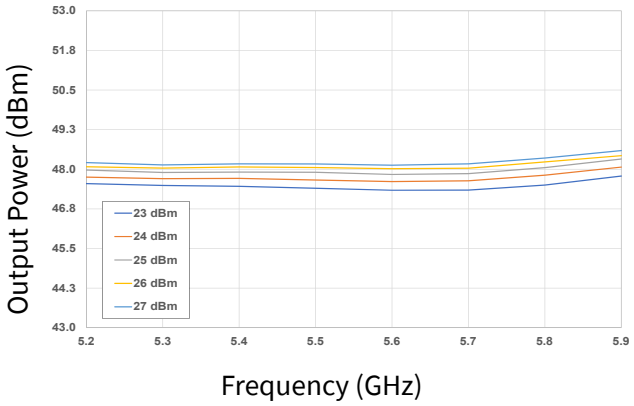


Figure 3. Power Added Eff. vs Frequency as a Function of Temperature

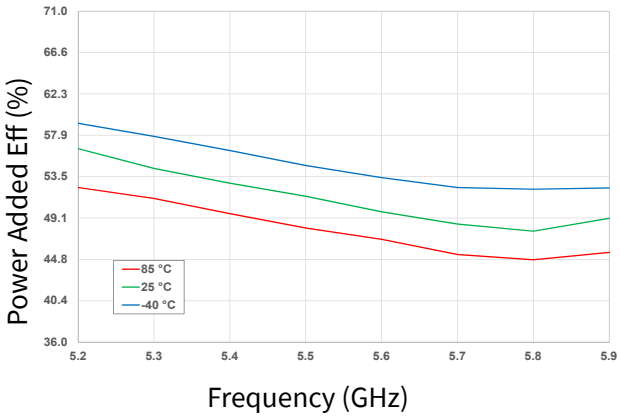


Figure 4. Power Added Eff. vs Frequency as a Function of Input Power

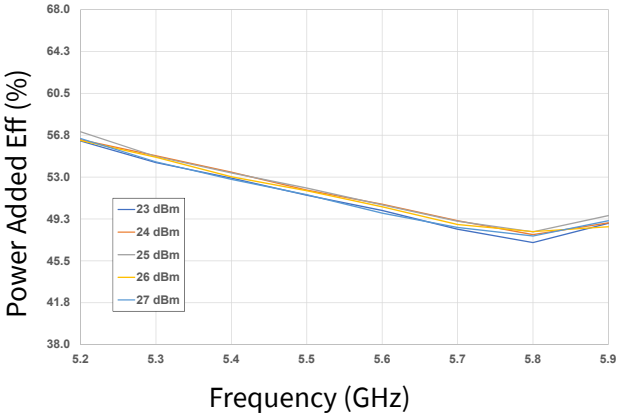


Figure 5. Drain Current vs Frequency as a Function of Temperature


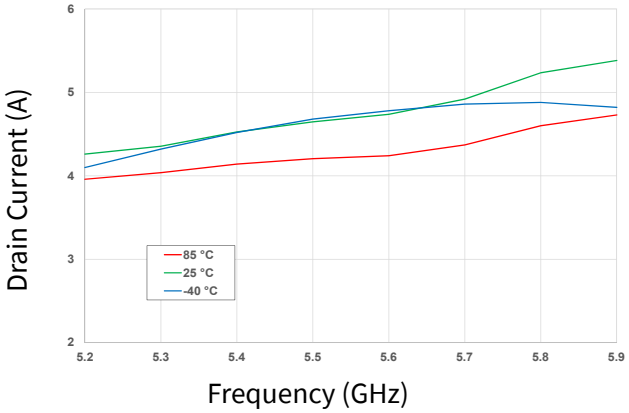


Figure 6. Drain Current vs Frequency as a Function of Input Power

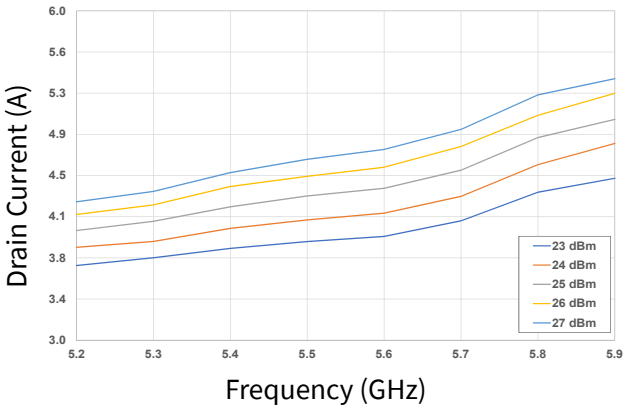

Typical Performance of the CMPA5259050S

Test conditions unless otherwise noted: V_D = 28 V, I_{DQ} = 500 mA, Pulse Width = 150 µs, Duty Cycle = 20%, Pin = 25 dBm, T_{BASE} = +25 °C

Figure 7. Output Power vs Frequency as a Function of VD

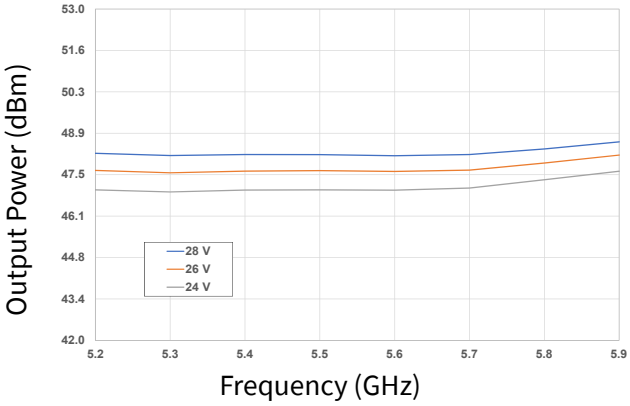


Figure 8. Output Power vs Frequency as a Function of IDQ

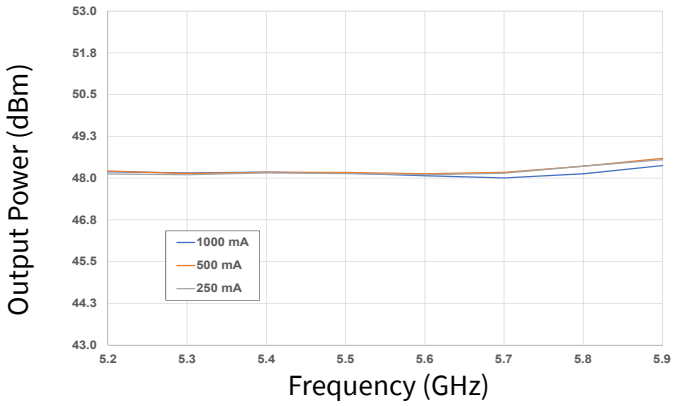


Figure 9. Power Added Eff. vs Frequency as a Function of VD

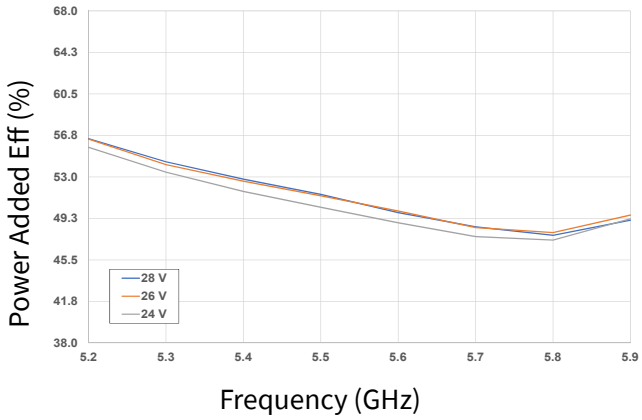


Figure 10. Power Added Eff. vs Frequency as a Function of IDQ

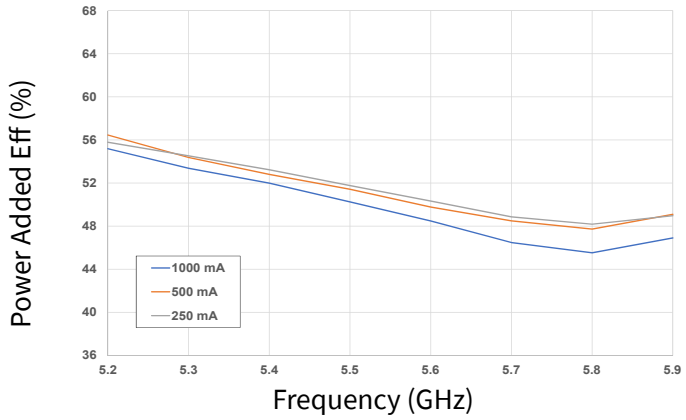


Figure 11. Drain Current vs Frequency as a Function of VD


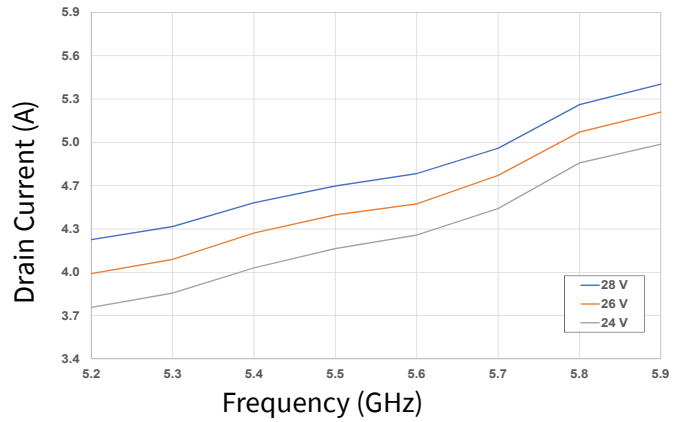


Figure 12. Drain Current vs Frequency as a Function of IDQ

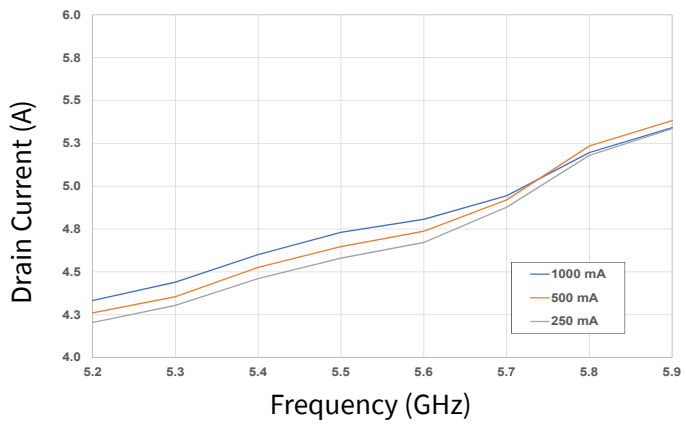

Typical Performance of the CMPA5259050S

Test conditions unless otherwise noted: V_D = 28 V, I_{DQ} = 500 mA, Pulse Width = 150 µs, Duty Cycle = 20%, Pin = 25 dBm, T_{BASE} = +25 °C

Figure 13. Output Power vs Input Power as a Function of Frequency

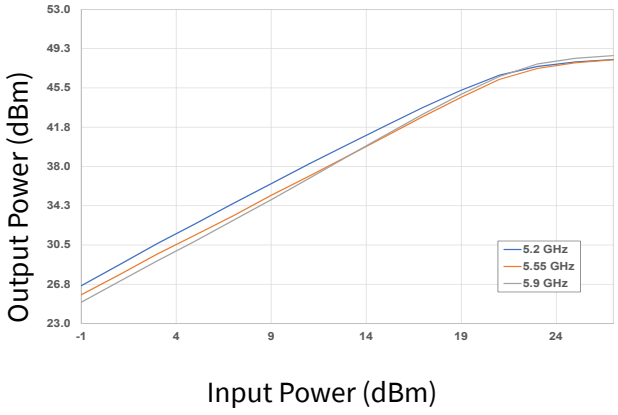


Figure 14. Power Added Eff. vs Input Power as a Function of Frequency

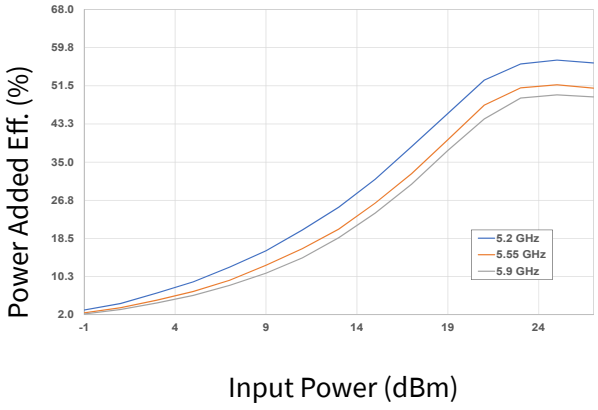


Figure 15. Large Signal Gain vs Input Power as a Function of Frequency

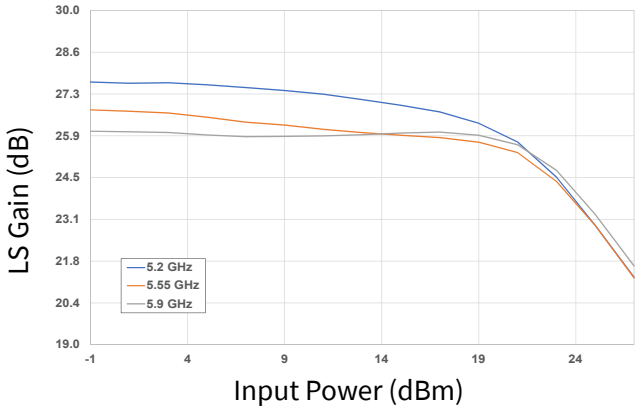


Figure 16. Drain Current vs Input Power as a Function of Frequency


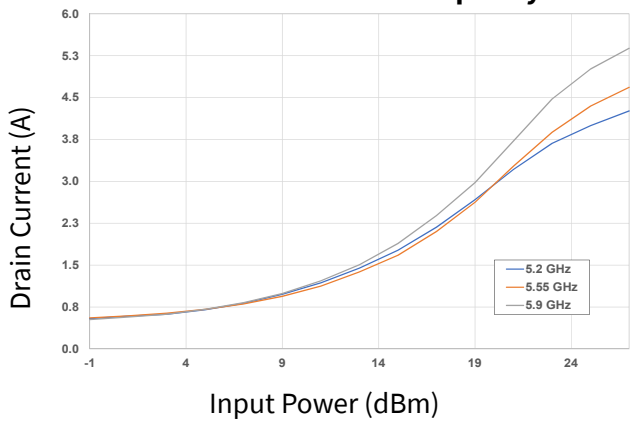


Figure 17. Gate Current vs Input Power as a Function of Frequency

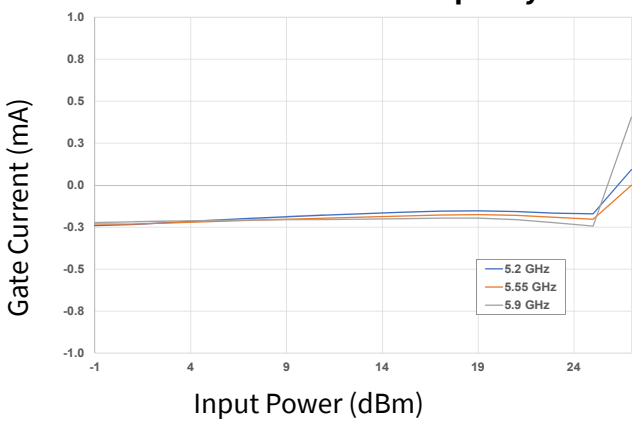

Typical Performance of the CMPA5259050S

Test conditions unless otherwise noted: V_D = 28 V, I_{DQ} = 500 mA, Pulse Width = 150 µs, Duty Cycle = 20%, Pin = 25 dBm, T_{BASE} = +25 °C

Figure 18. Output Power vs Input Power as a Function of Temperature

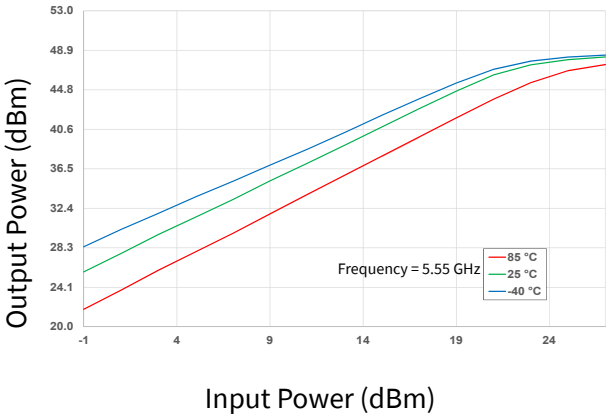


Figure 19. Power Added Eff. vs Input Power as a Function of Temperature

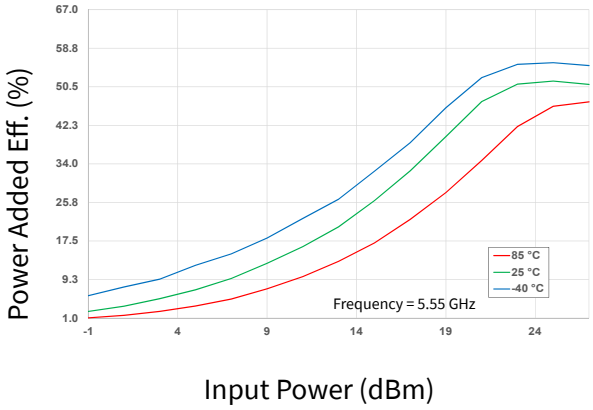


Figure 20. Large Signal Gain vs Input Power as a Function of Temperature

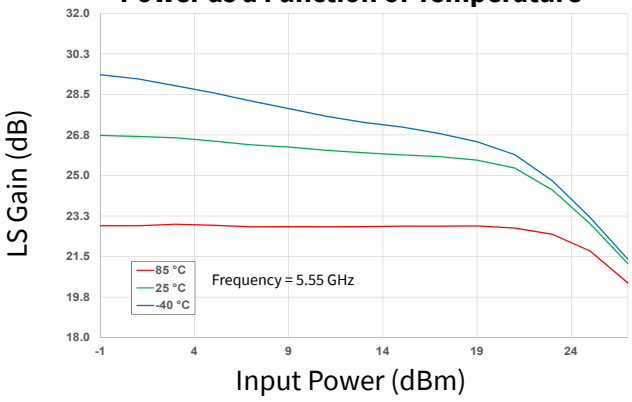


Figure 21. Drain Current vs Input Power as a Function of Temperature


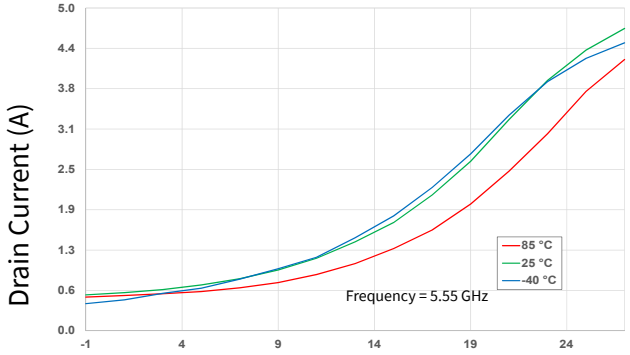


Figure 22. Gate Current vs Input Power as a Function of Temperature

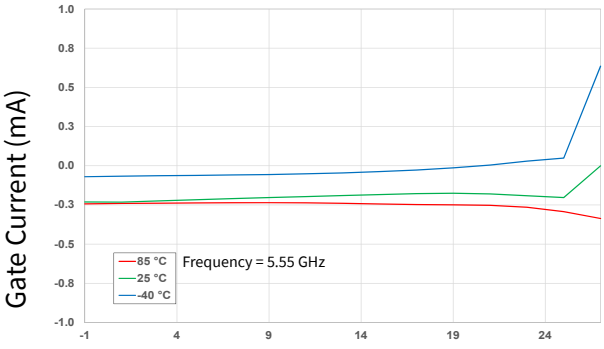

Typical Performance of the CMPA5259050S

Test conditions unless otherwise noted: V_D = 28 V, I_{DQ} = 500 mA, Pulse Width = 150 µs, Duty Cycle = 20%, Pin = 25 dBm, T_{BASE} = +25 °C

Figure 23. Output Power vs Input Power as a Function of IDQ

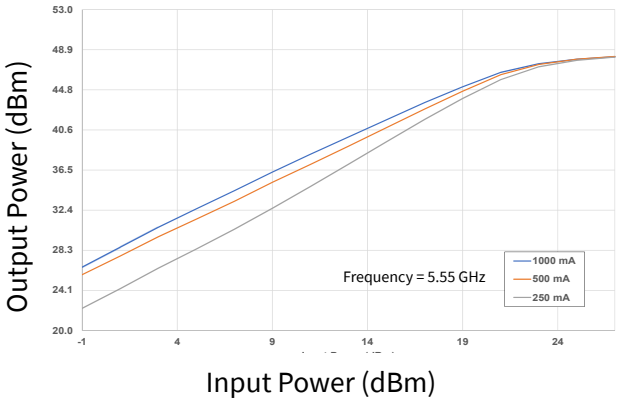


Figure 24. Power Added Eff. vs Input Power as a Function of IDQ

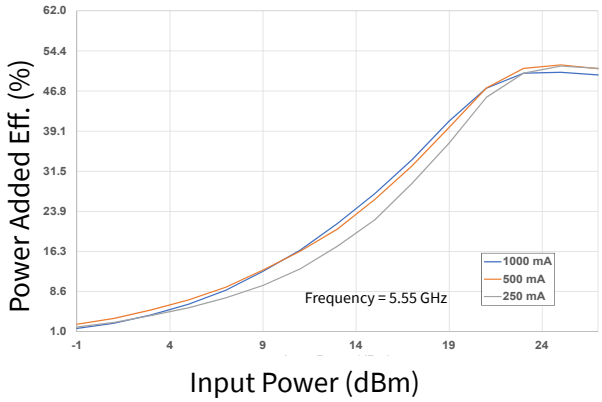


Figure 25. Large Signal Gain vs Input Power as a Function of IDQ

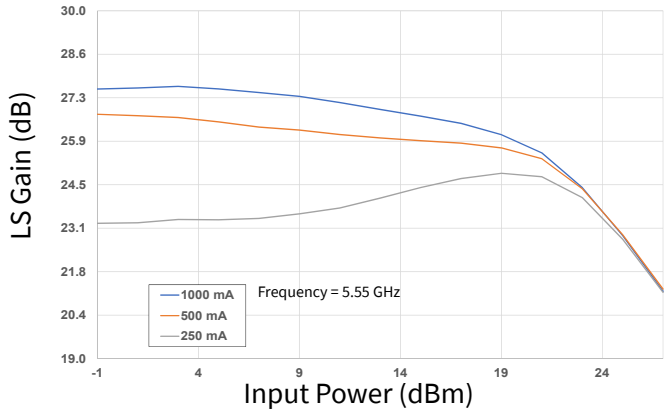


Figure 26. Drain Current vs Input Power as a Function of IDQ


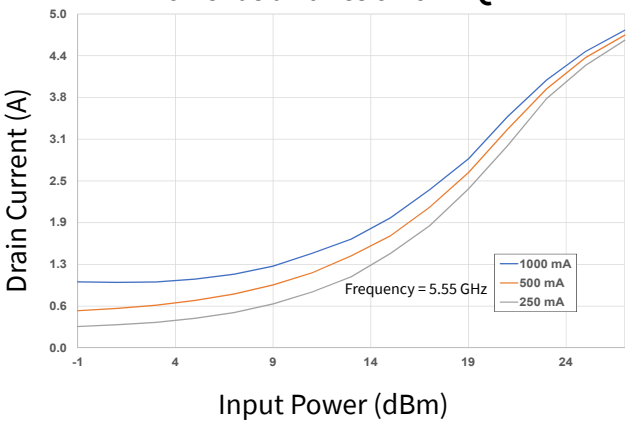


Figure 27. Gate Current vs Input Power as a Function of IDQ

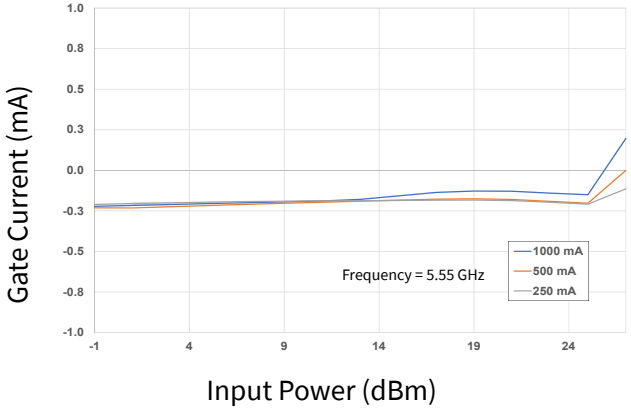

Typical Performance of the CMPA5259050S

Test conditions unless otherwise noted: V_D = 28 V, I_{DQ} = 500 mA, Pulse Width = 150 µs, Duty Cycle = 20%, Pin = 25 dBm, T_{BASE} = +25 °C

Figure 28. 2nd Harmonic vs Frequency as a Function of Temperature

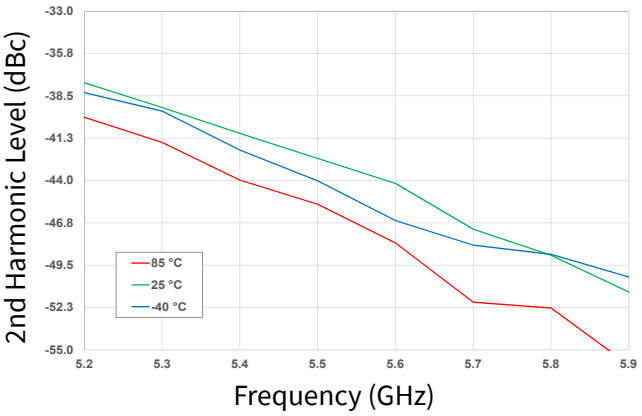


Figure 29. 3rd Harmonic vs Frequency as a Function of Temperature

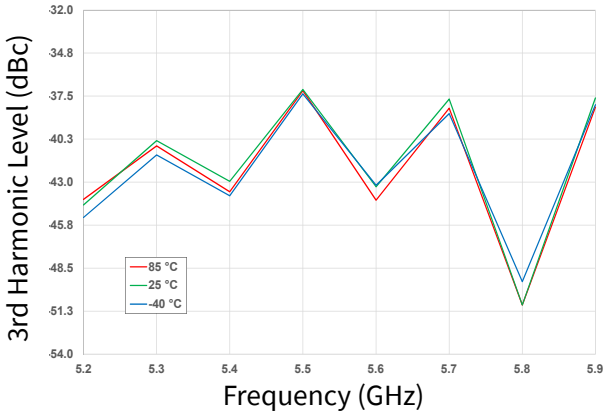


Figure 30. 2nd Harmonic vs Output Power as a Function of Frequency

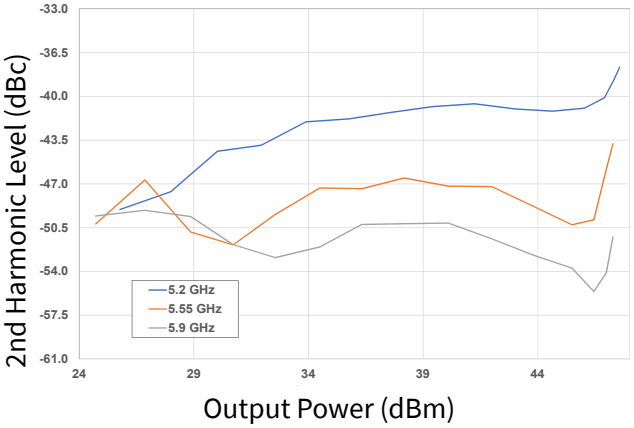


Figure 31. 3rd Harmonic vs Output Power as a Function of Frequency

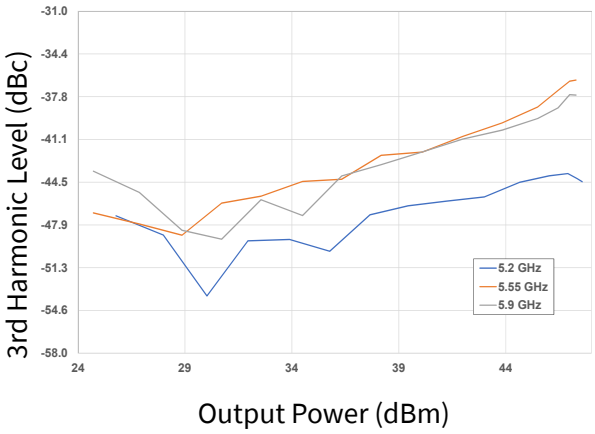


Figure 32. 2nd Harmonic vs Output Power as a Function of IDQ


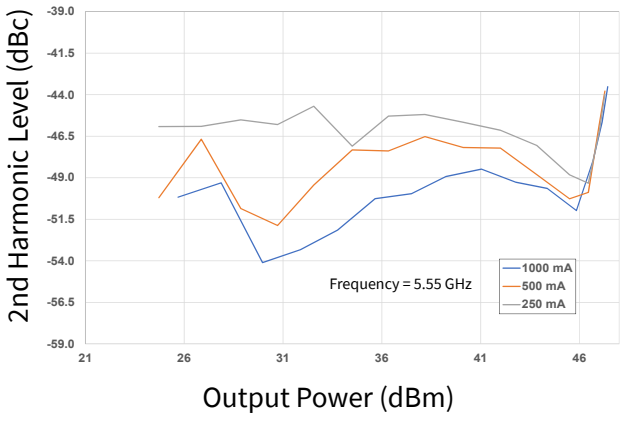


Figure 33. 3rd Harmonic vs Output Power as a Function of IDQ

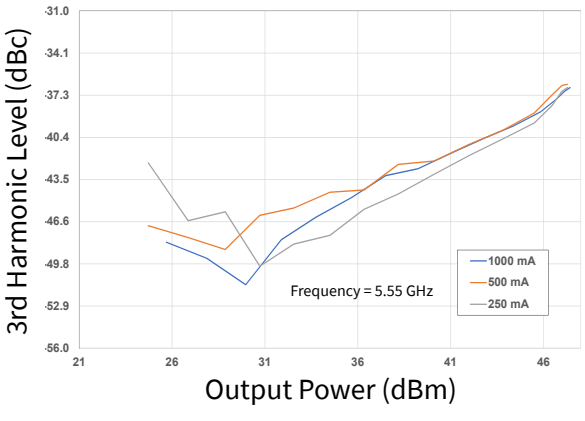

Typical Performance of the CMPA5259050S

Test conditions unless otherwise noted: V_D = 28 V, I_{DQ} = 500 mA, Pin = -20 dBm, T_{BASE} = +25 °C

Figure 34. Gain vs Frequency as a Function of Temperature

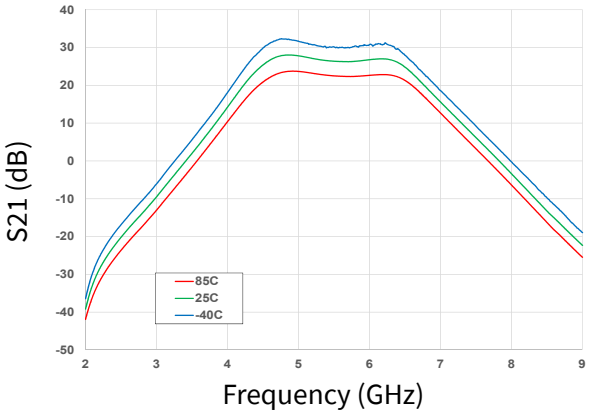


Figure 35. Gain vs Frequency as a Function of Temperature

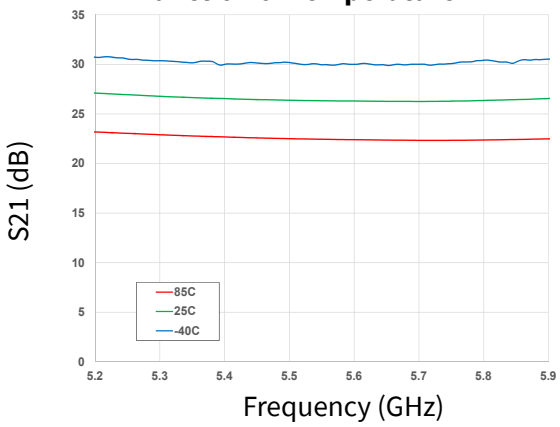


Figure 36. Input RL vs Frequency as a Function of Temperature

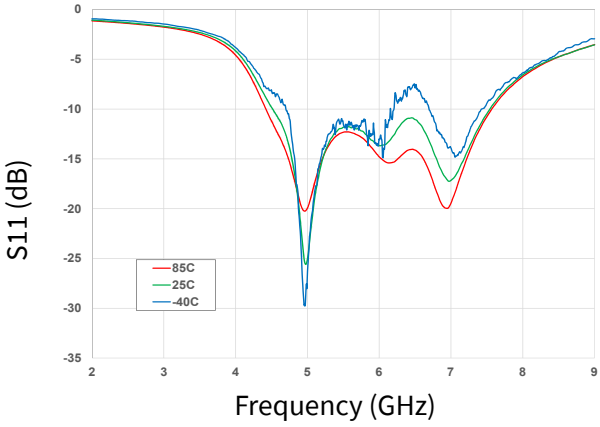


Figure 37. Input RL vs Frequency as a Function of Temperature

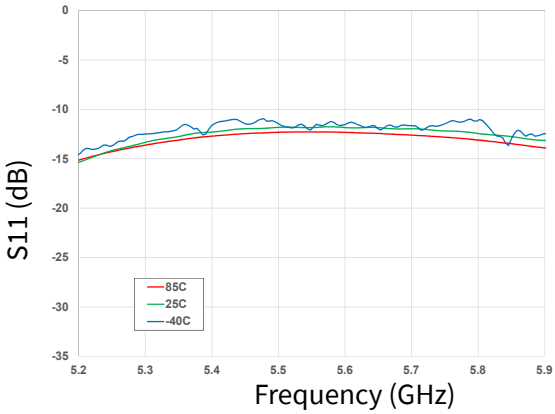


Figure 38. Output RL vs Frequency as a Function of Temperature


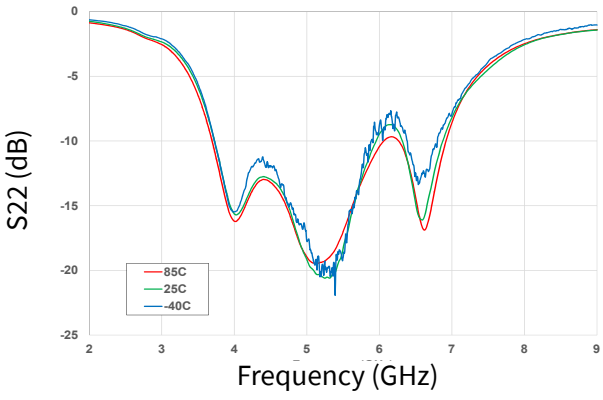


Figure 39. Output RL vs Frequency as a Function of Temperature

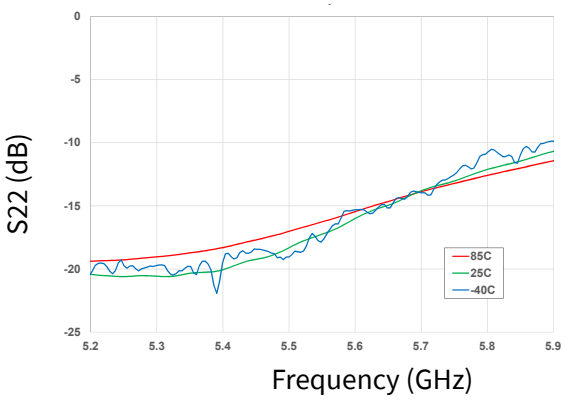

Typical Performance of the CMPA5259050S

Test conditions unless otherwise noted: V_D = 28 V, I_{DQ} = 500 mA, Pin = -20 dBm, T_{BASE} = +25 °C

Figure 40. Gain vs Frequency as a Function of Voltage

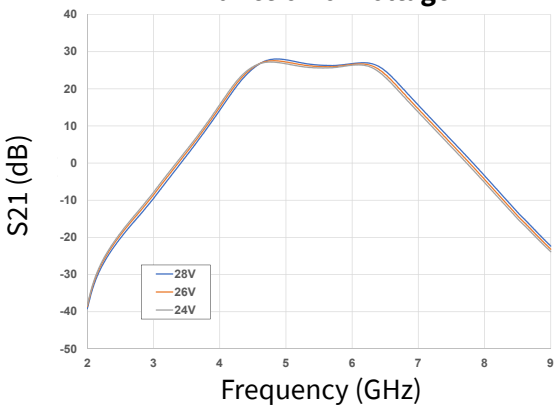


Figure 41. Gain vs Frequency as a Function of IDQ

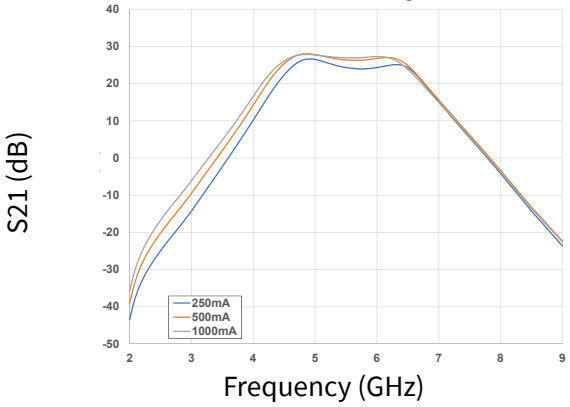


Figure 42. Input RL vs Frequency as a Function Voltage

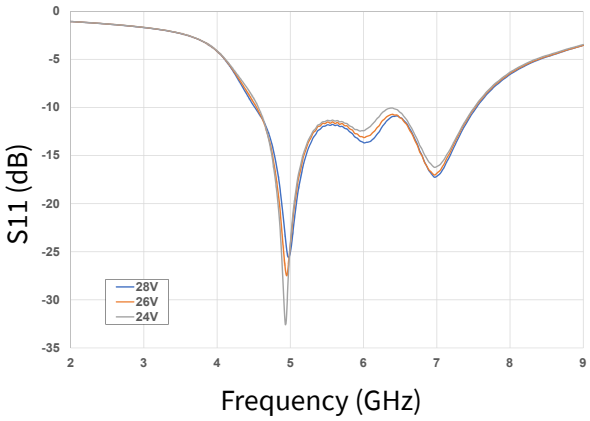


Figure 43. Input RL vs Frequency as a Function of IDQ

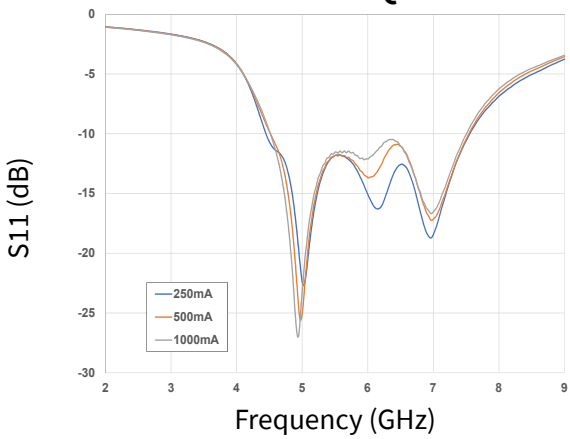


Figure 44. Output RL vs Frequency as a Function of Voltage



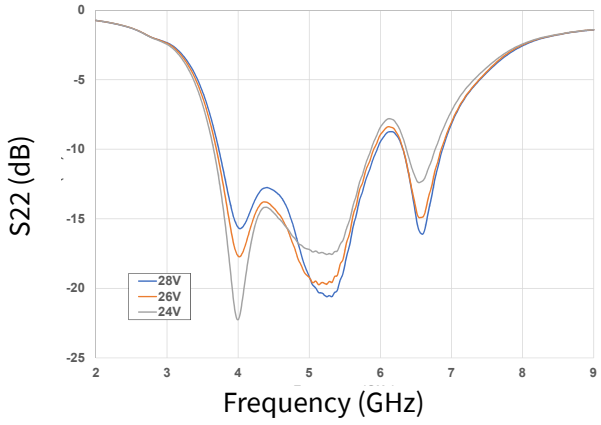



Figure 45. Output RL vs Frequency as a Function of IDQ

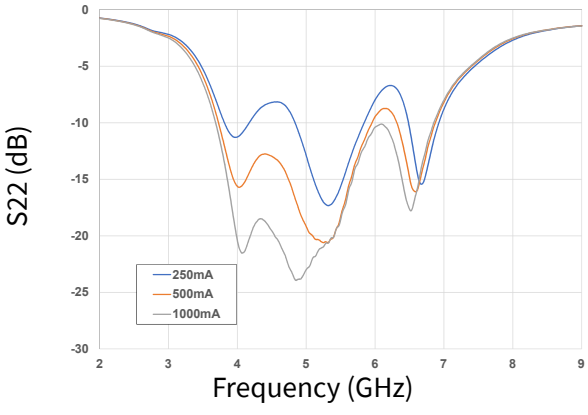

CMPA5259050S-AMP1 Demonstration Amplifier Schematic

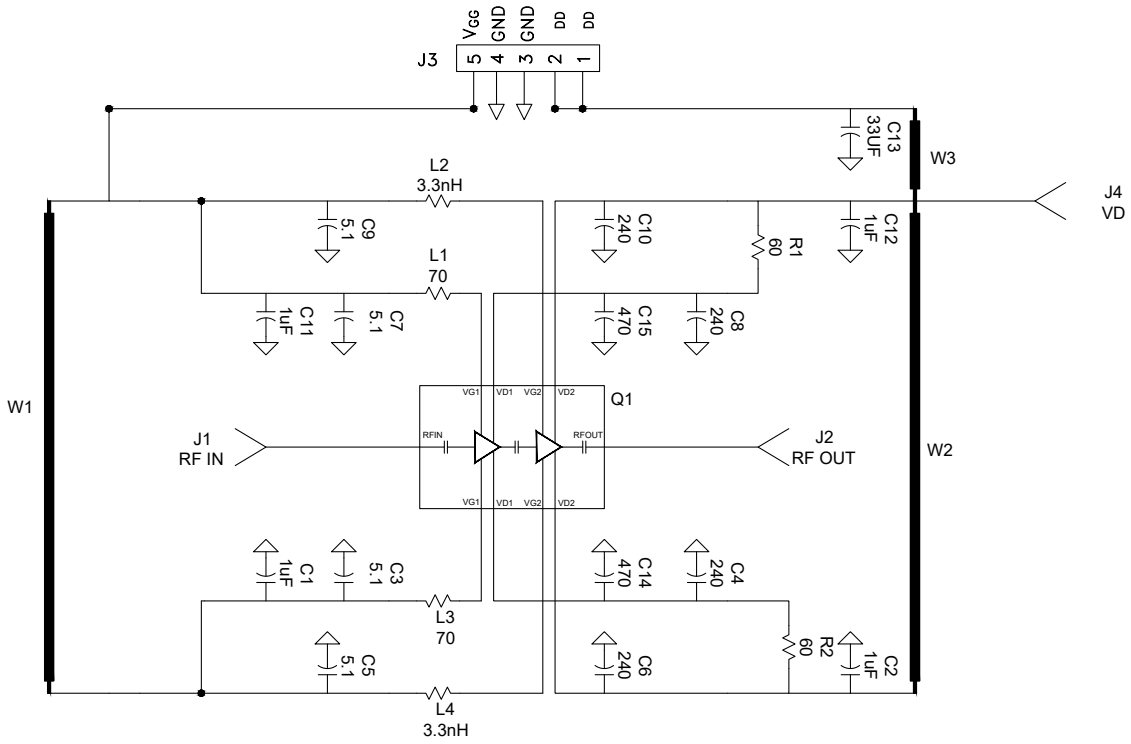

CMPA5259050S-AMP1 Demonstration Amplifier Circuit Outline

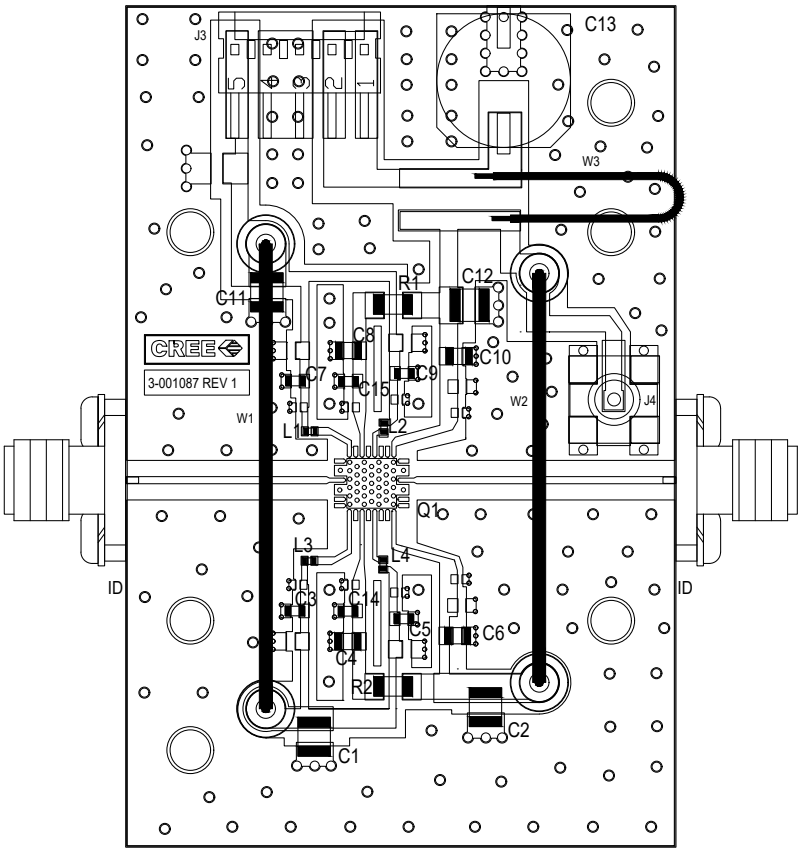

CMPA5259050S-AMP1 Demonstration Amplifier Circuit Bill of Materials

Designator	Description	Qty
C13	CAP, 33 UF, 20%, G CASE	1
C1, C2, C11, C12	CAP, 1.0UF, 100V, 10%, X7R, 1210	4
C3, C5, C7, C9	CAP, 5.1pF, +/-0.05pF, 0603, ATC, 600S	4
C4, C6, C8, C10	CAP, 240 PF +/-5%, 0805, ATC, 600F	4
C14, C15	470pF, NPO/COG 0603	2
L2, L4	INDUCTOR, SMT, 0402, 3.3nH, 5%	2
L1, L3	Ferrite bead, 70 ohm, 780mA, 0402	2
R1, R2	Ferrite bead, 60 ohm, 3.7A, 18806	2
J1, J2	CONN, SMA, PANEL MOUNT JACK, FLANGE, 4-HOLE, BLUNT POST, 20MIL	2
J3	HEADER RT>PLZ .1CEN LK 5POS	1
J4	CONN, SMB, STRAIGHT JACK RECEPTACLE, SMT, 50 OHM, Au PLATED	1
W1	WIRE, BLACK, 20 AWG ~ 1.5”	1
W2	WIRE, BLACK, 20 AWG ~ 1.3”	3
W3	WIRE, BLACK, 20 AWG ~ 1.5”	3
	PCB, TEST FIXTURE, RF35, 0.010", 5X5 2-STAGE, QFN	1
	HEATSINK, 6X6 QFN, 3-STAGE 2.600 X 1.700 X 0.250	1
	2-56 SOC HD SCREW 3/16 SS	4
	#2 SPLIT LOCKWASHER SS	4
Q1	CMPA5259050S	1

Electrostatic Discharge (ESD) Classifications

Parameter	Symbol	Class	Test Methodology
Human Body Model	HBM	1B (≥ 500 V)	JEDEC JESD22 A114-D
Charge Device Model	CDM	II (≥ 200 V)	JEDEC JESD22 C101-C


Moisture Sensitivity Level (MSL) Classification


Parameter	Symbol	Level	Test Methodology
Moisture Sensitivity Level	MSL	3 (168 hours)	IPC/JEDEC J-STD-20


Product Dimensions CMPA5259050S (Package 5 x 5 QFN)

SYMBOL	MIN.	NOM.	MAX.	NOTE
A	0.80	0.90	1.00	
A1	0.00	0.03	0.06	
A3		0.203 REF.		
θ	0	—	12	2
K		0.17 MIN.		
D		5.0 BSC		
E		5.0 BSC		


SYMBOL	0.50mm LEAD PITCH			NOTE
	MIN.	NOM.	MAX.	
e		0.50 BSC.		
N		32		3
ND		8		5
NE		8		5
L	0.35	0.41	0.46	
b	0.21	0.25	0.29	4
D2	3.76	3.82	3.88	
E2	3.76	3.82	3.88	

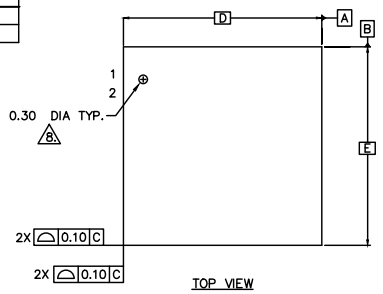



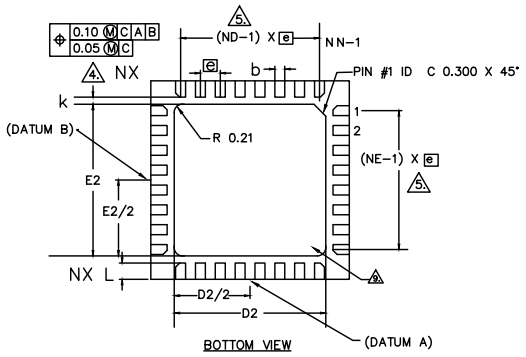

NOTES :
1. DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5M. – 1994.
2. ALL DIMENSIONS ARE IN MILLIMETERS, θ IS IN DEGREES.
3. N IS THE TOTAL NUMBER OF TERMINALS.
4. DIMENSION b APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30mm FROM TERMINAL TIP.
5. ND AND NE REFER TO THE NUMBER OF TERMINALS ON EACH D AND E SIDE RESPECTIVELY.
6. MAX. PACKAGE WARPAGE IS 0.05 mm.
7. MAXIMUM ALLOWABLE BURRS IS 0.076 mm IN ALL DIRECTIONS.
8. PIN #1 ID ON TOP WILL BE LASER MARKED.
9. BILATERAL COPLANARITY ZONE APPLIES TO THE EXPOSED HEAT SINK SLUG AS WELL AS THE TERMINALS.
10. THIS DRAWING CONFORMS TO JEDEC REGISTERED OUTLINE MO-220
11. ALL PLATED SURFACES ARE 100% TIN MATTE 0.010 mm +/- 0.005 mm.

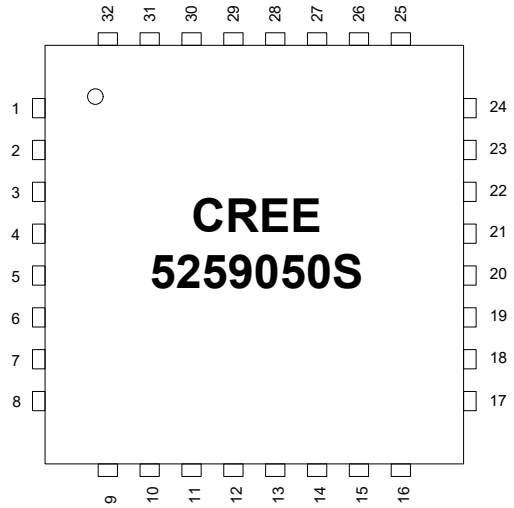

PIN	DESC.	PIN	DESC.	PIN	DESC.
1	NC	15	NC	29	NC
2	NC	16	VD2A	30	VD1B
3	RFGND	17	NC	31	NC
4	RFIN	18	NC	32	VG1B
5	RFGND	19	NC		
6	NC	20	RFGND		
7	NC	21	RFOUT		
8	NC	22	RFGND		
9	VG1A	23	NC		
10	NC	24	NC		
11	VD1A	25	VD2B		
12	NC	26	NC		
13	VG2A	27	NC		
14	NC	28	VG2B		

Part Number System

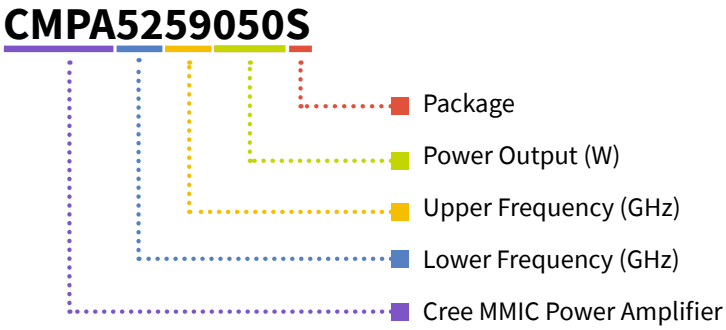


Table 1.



Parameter	Value	Units
Lower Frequency	5.0	GHz
Upper Frequency	5.9	GHz
Power Output	50	W
Package	Surface Mount	-

Note[1]: Alpha characters used in frequency code indicate a value greater than 9.9 GHz. See Table 2 for value.

Table 2.

Character Code	Code Value
A	0
B	1
C	2
D	3
E	4
F	5
G	6
H	7
J	8
K	9
Examples:	1A = 10.0 GHz 2H = 27.0 GHz

Product Ordering Information

Order Number	Description	Unit of Measure	Image
CMPA5259050S	GaN HEMT	Each	
CMPA5259050S-AMP1	Test board with GaN MMIC installed	Each	

For more information, please contact:

4600 Silicon Drive
Durham, North Carolina, USA 27703
www.wolfspeed.com/RF

Sales Contact
RFSales@wolfspeed.com

RF Product Marketing Contact
RFMarketing@wolfspeed.com

Notes

Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. “Typical” parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer’s technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.

© 2020 Cree, Inc. All rights reserved. Wolfspeed® and the Wolfspeed logo are registered trademarks of Cree, Inc.