
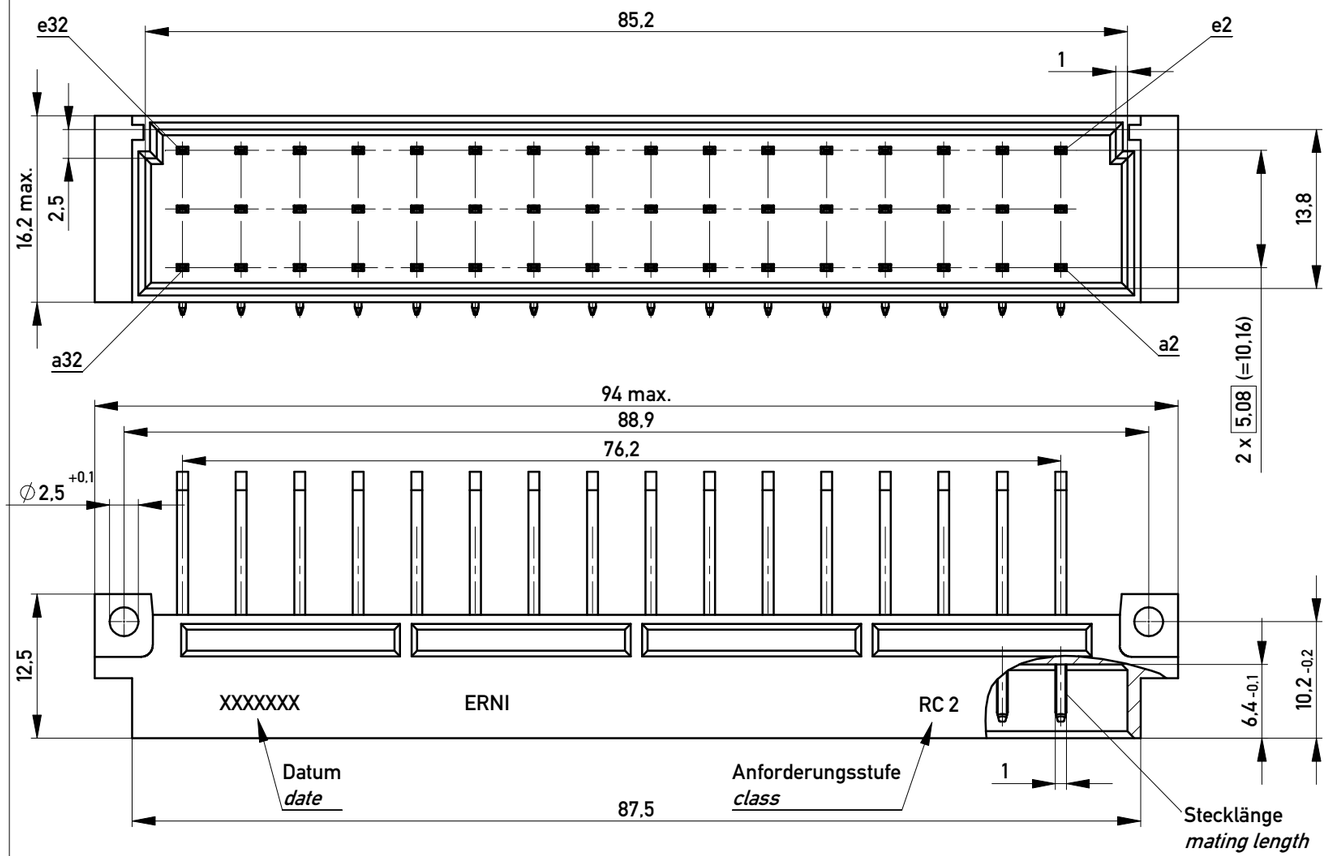



Stecklänge / *mating length*




E = *early mate, late break* / voreilend

S = standard


L = *late mate, early break* / nacheilend

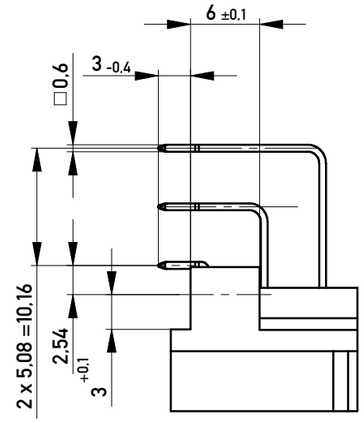

Bestückungsplan / *contact layout*

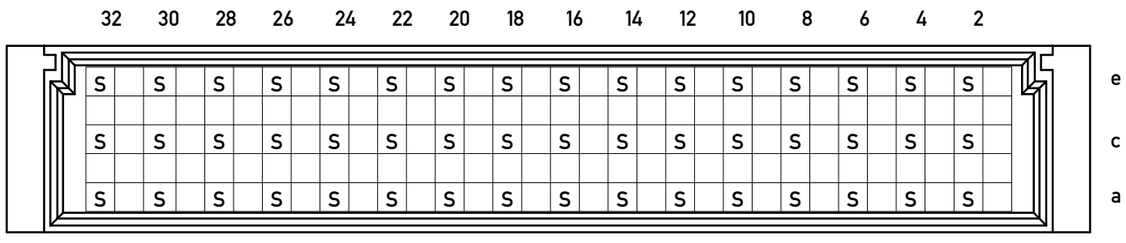

Leiterplatten-Lochbild / *PCB drillhole pattern*

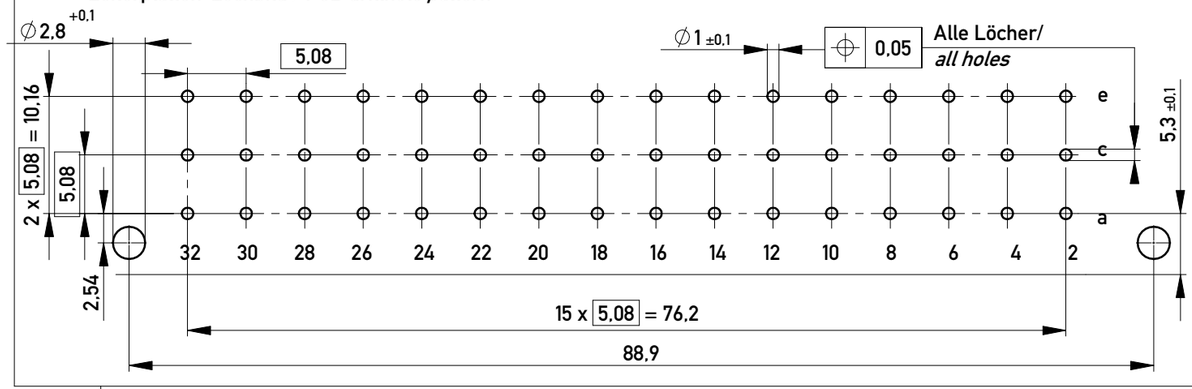

Steckseite ACE / Anschlussseite ACE / *contact side ACE / terminal Side ACE*
Lötanschluss 0,6 x 0,6 / *solder terminal 0,6 x 0,6*
Isolierwerkstoff / *housing material : PBT GF 30*
Bauart 4 / *Type 4*
Anforderungsstufe 2 = 400 Steckzyklen / *performance class 2= 400 mating cycles*
Fehlende Maße und Angaben gemäss IEC 60603-2 / DIN EN 60603-2
Missing information and dimensions according to IEC 60603-2

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information:

Tolerances — All Dimensions in mm

Scale 2:1

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation

Messerleiste E48 Löt
Male Con. E48 Solder

ERNI www.ERNI.com

100700760003 K

Index		Date	
a		20.08.2010	

A3

Class STVE